



LENOX 

PRODUCT CATALOG

BAND SAW BLADES
POWER TOOL ACCESSORIES
HAND TOOLS

2017





TABLE^{OF} **CONTENTS**

UPBLADE WITH LENOX

1-9

BAND SAW

10-49



POWER TOOL ACCESSORIES

50-93

HAND TOOLS

94-104

asia@lenoxtools.com

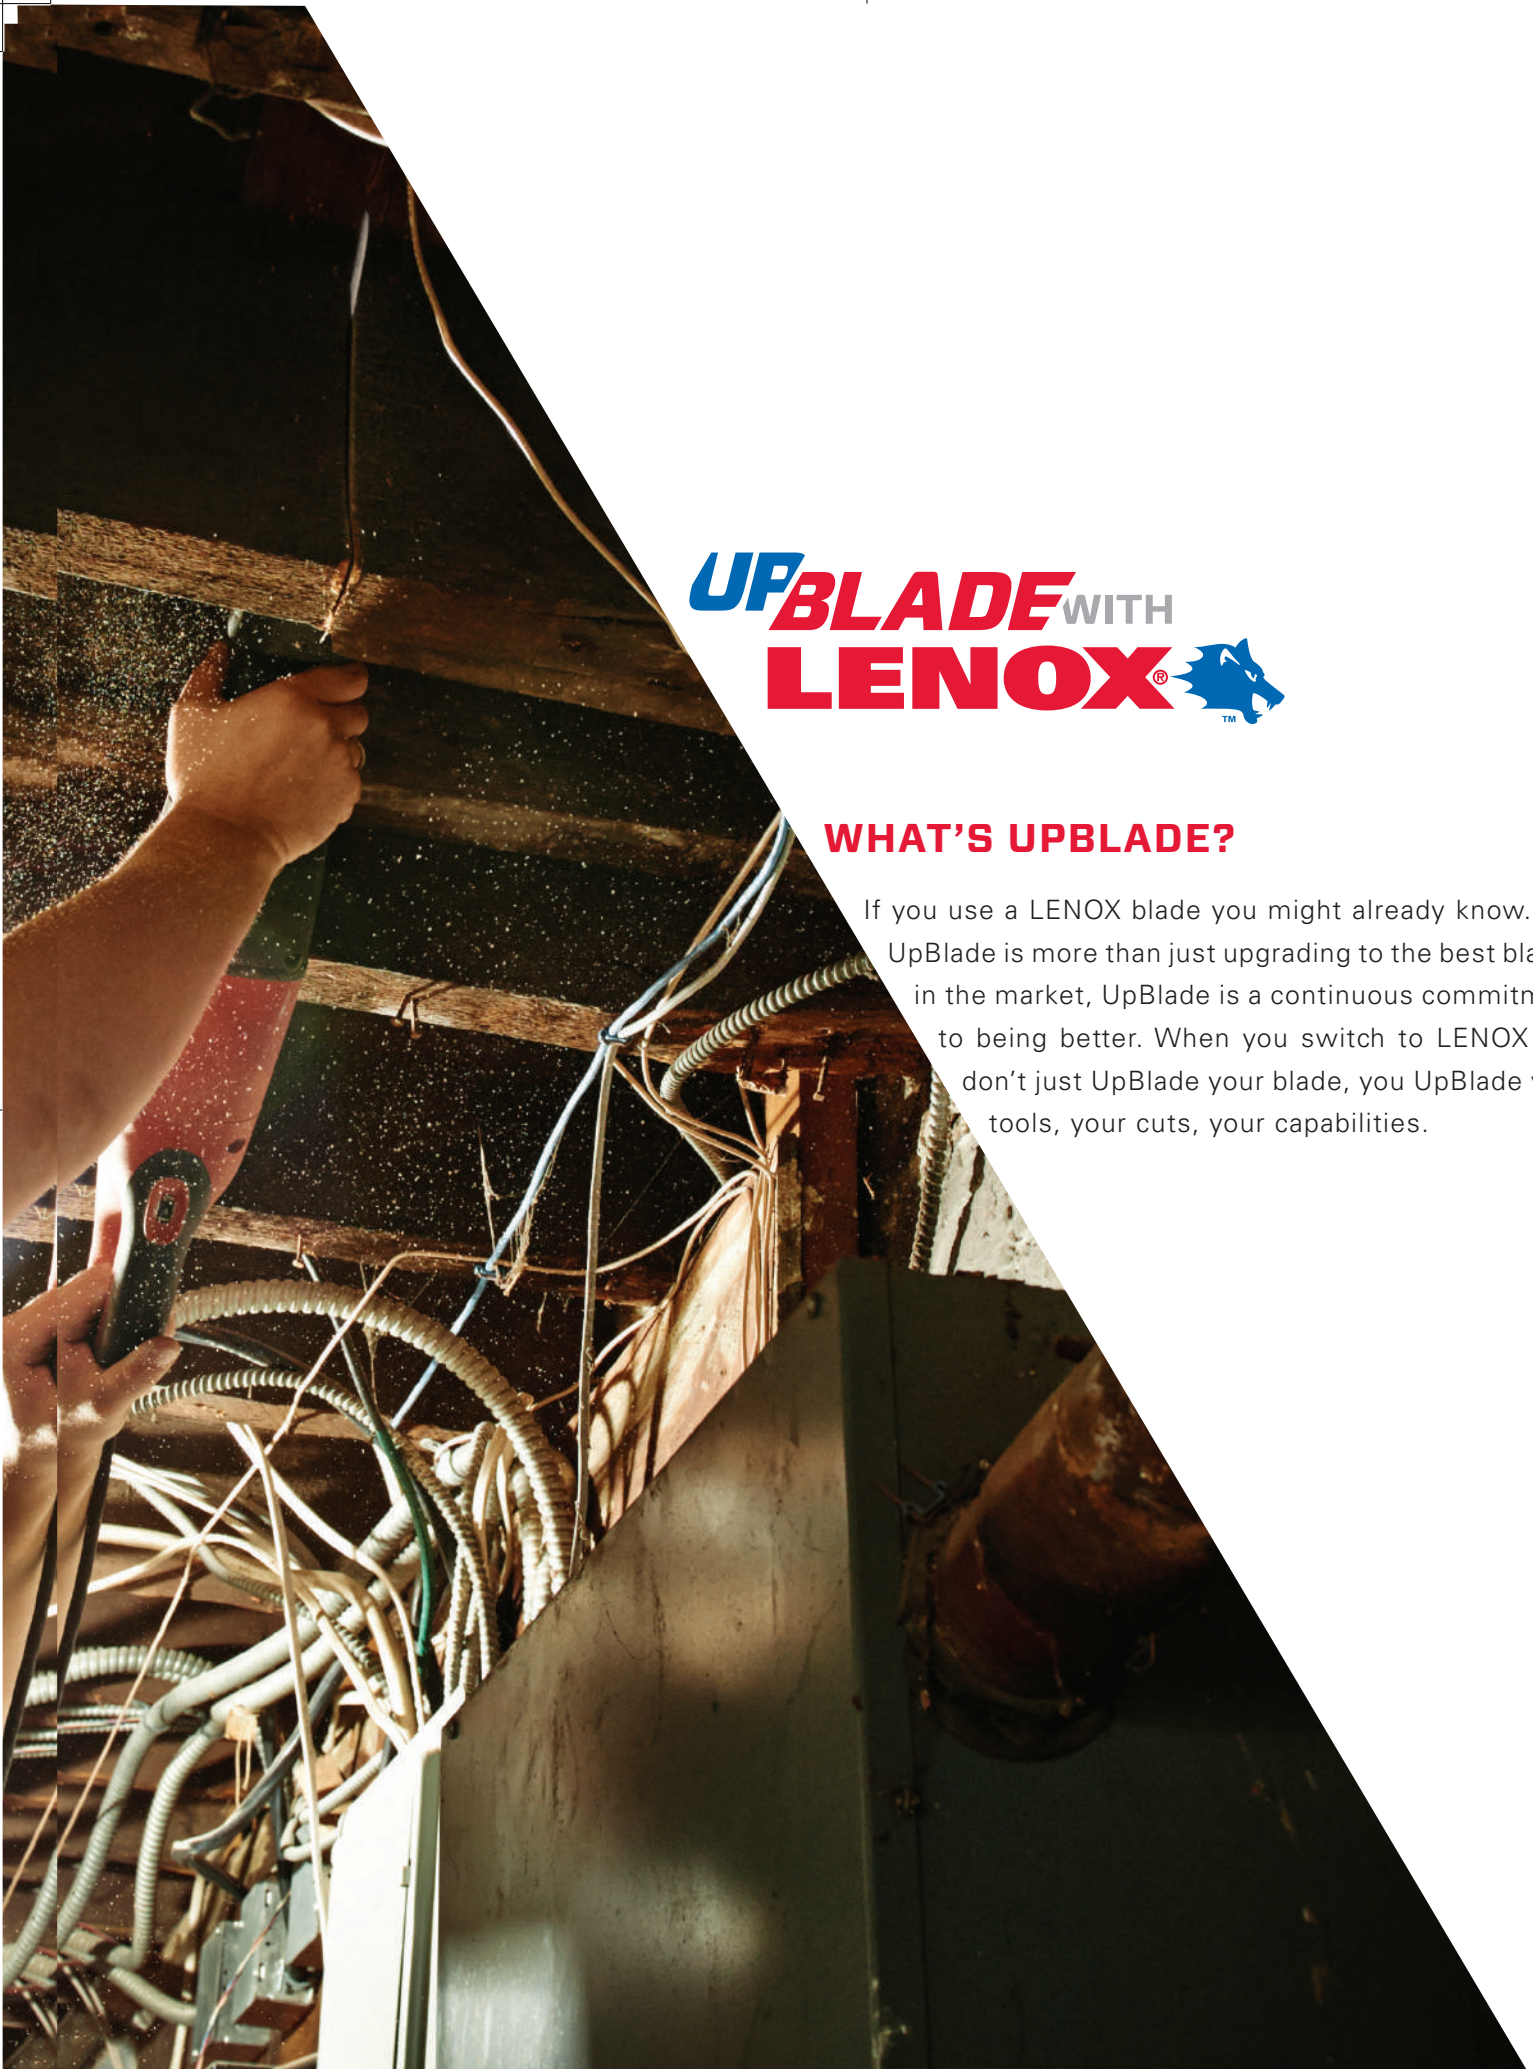

UPBLADE^{WITH}
LENOX 

WHAT'S UPBLADE?

If you use a LENOX blade you might already know. But UpBlade is more than just upgrading to the best blades in the market, UpBlade is a continuous commitment to being better. When you switch to LENOX you don't just UpBlade your blade, you UpBlade your tools, your cuts, your capabilities.

lenoxtools.com

1





UPBLADE™ YOUR OPERATIONS

WHEN CUTTING IS WHAT YOU DO, THE BLADE YOU CHOOSE BECOMES EVEN MORE IMPORTANT.

You're only as efficient as your blade allows you to be. That's why we make sure our band saw blades cut faster and last longer, with the lowest cost per cut—making your operations more competitive. And with our tech reps making sure that our blades are always working at their optimal level, you'll spend more time cutting and less time changing blades. If you don't believe us, talk to your LENOX® representative about taking the UpBlade Challenge.



UPBLADE™ YOUR CAPABILITIES

THERE'S ONLY ONE PART OF YOUR SAW THAT ACTUALLY MAKES THE CUT — THE BLADE.

So you could have the best power tools and machines in the world, but they'll only be as good as the blades you put in them. And even though it might only be part of your job, if your blade isn't making the cut, the whole job pays the price. From our reciprocating saw blades to our carbide band saw blades, our products are always at the forefront of innovation and quality. Our blades are faster and more efficient, allowing you to unlock your full potential.






UPBLADE™ YOUR CRAFT

HAVING THE BEST BLADES IS ONLY PART OF THE EQUATION.

To truly UpBlade, you must also improve yourself. That's why we've developed the LENOX Institute of Technology (LIT).


We provide our Technical Service Reps, distributor partners and consumers with hands-on training by expert instructors who have years of LENOX experience and application knowledge. Because our blades are only as good as the hands that wield them, LIT helps us make sure those hands are amongst the best in the business.



OUR UPBLADE HERITAGE.

The word UpBlade represents a mindset that LENOX® has lived by from day one. For nearly 100 years we've led the industry through many changes and innovations, and our blades have consistently remained on top. You saw this reflected in *HACKMAN*® as he toured the world facing bigger challenges at every stop—returning to us with insights that helped improve our blades' designs. And you see it with the challenges we put before our blades in our One Blade campaign. Challenges such as cutting 8 cars with a single blade. As we push our blades to the limit we UpBlade not only their achievements, but your perception of what one blade is capable of. UpBlade is the reason LENOX makes the best blades in the market. Because we're not satisfied with being the best. We're working hard every day to get even better.





*As compared to previous generation LENOX reciprocating saw blades. ©2016 LENOX. All Rights Reserved.

NEW

UP HERE, THERE'S NO TIME FOR BREAKS. GET THE BLADE THAT'S **BUILT STRONGER TO CUT LONGER.***

The new LENOX BI-METAL RECIPS are built with Power Blast Technology™, which means extended blade life and less trips to the tool box. The blade's steel is strengthened using a unique, high-speed blasting operation that reduces breaks and increases durability, so you can cut on and on. Learn more at lenoxtools.com and put it to the test for yourself.



LENOX

BUILT STRONGER WITH POWER BLAST TECHNOLOGY™ TO LAST LONGER.

lenoxtools.com

7

COMMITTED TO BEING BETTER FOR NEARLY 100 YEARS



1915

LENOX® American Saw founded by John Swanson, Carl Ericson, and Carl Davis to manufacture Hacksaw Blades in Springfield, MA

1918

Band Saw Blade production begins

Hand Tools and Power Tool Accessories.


1977

First Bi-metal Reciprocating Saw Blades



LENOX purchases an electron beam welder and begins manufacturing Bi-metal Band Saw Blades Band Saw Technical Team was created

1965



1964

All LENOX operations moved to its current location in East Longmeadow, MA

1981

HACKMAN® uses a LENOX Hacksaw Blade to cut his first car in half



Hacksaw Frames and Carbide Band Saw Blades added to the product line

1985

2007

Snips, Bi-metal Drilling Bits and Q Performance Solution™ Band Saw Blades added to the product line

Asia Pacific headquarters set up in Shanghai

2006




2005

ARMOR® Band Saw Blades added to the product line

LENOX T2™ Technology recip blades.

2008

Bi-Metal Drilling technology added to product line




2009

HACKMAN®
WORLD TOUR 2009

Q88™ Band Saw Blade launched in Asia

LENOX®
INSTITUTE OF TECHNOLOGY

2010



LENOX's "The Blade in the Plaid Box" airplane flies from Portland, ME to Daytona, FL dropping circulars as it passes over large cities

1921

1952

A second plant was built on Chestnut Street, East Longmeadow, MA


LENOX began manufacturing Band Saw Blades at the East Longmeadow facility

1961



1959

Hole Saws added to product line



1986

LENOX VARI-BIT® added to the product line

LENOX enters the Latin American Market

1987



1991

LENOX Self-Feed Bits added to the product line

LENOX Gold® Bi-metal Utility Blade and Knife added to the product line

2004

1998

LENOX purchases a local Hand Hacksaw and Utility Knife Blade manufacturer and opened LENOX of Brazil



LENOX becomes the first company in the blade industry to achieve ISO 9001 certification

1996

2011

Bi-Metal SPEED SLOT® Hole Saw





2014

CircTech Precision Metal Cutting Saw Blades and Gold Power Arc Curved Reciprocating Blades launch






2015
100 YEAR ANNIVERSARY





BANDSAW ***BLADES***




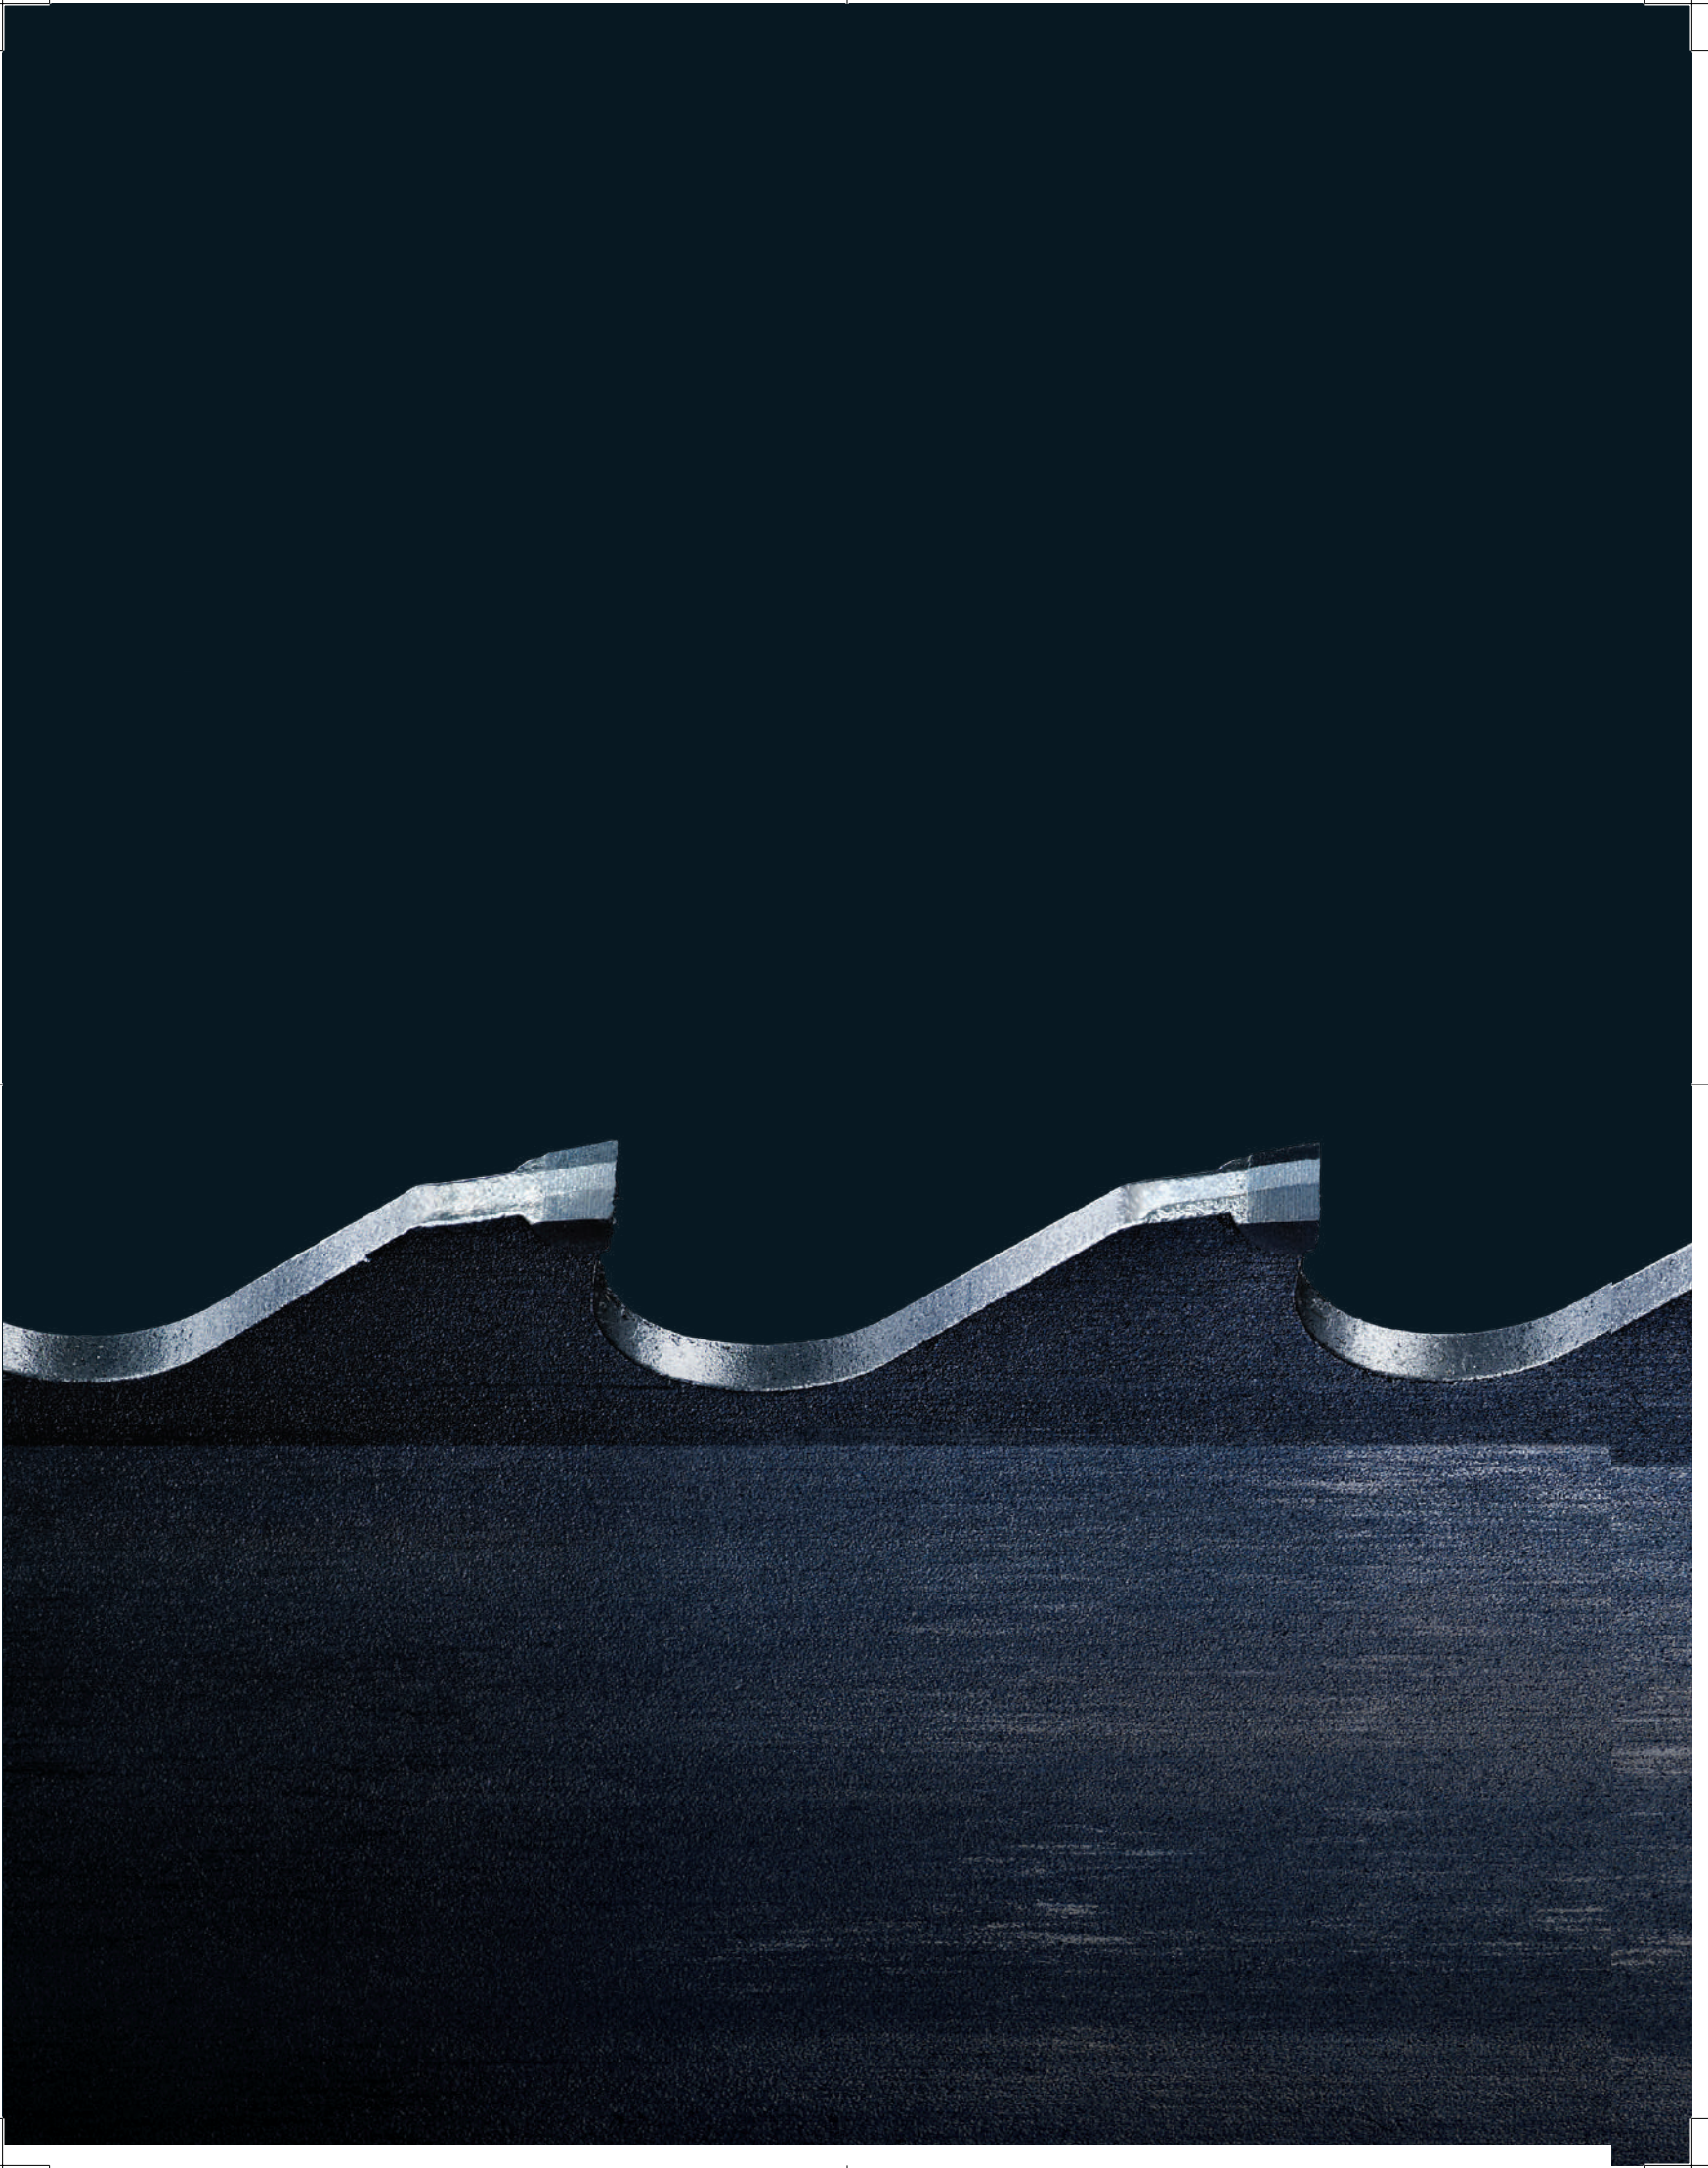



CARBIDE ***BAND SAW BLADES***

Selecting Carbide Blades.....	14
Carbide Tooth Selection	15
<i>ARMOR</i> ® CT BLACK.....	16
<i>LENOX MAX CT</i> ™ & <i>TRI-TECH CT</i> ™	17
<i>VERSA PRO</i> ™	18
<i>TRI-MASTER</i> ® & <i>CAST MASTER</i> ™	19
<i>LENOX HRc</i> ® & <i>MASTER-GRIT</i> ®	20
Carbide Speed Chart	21

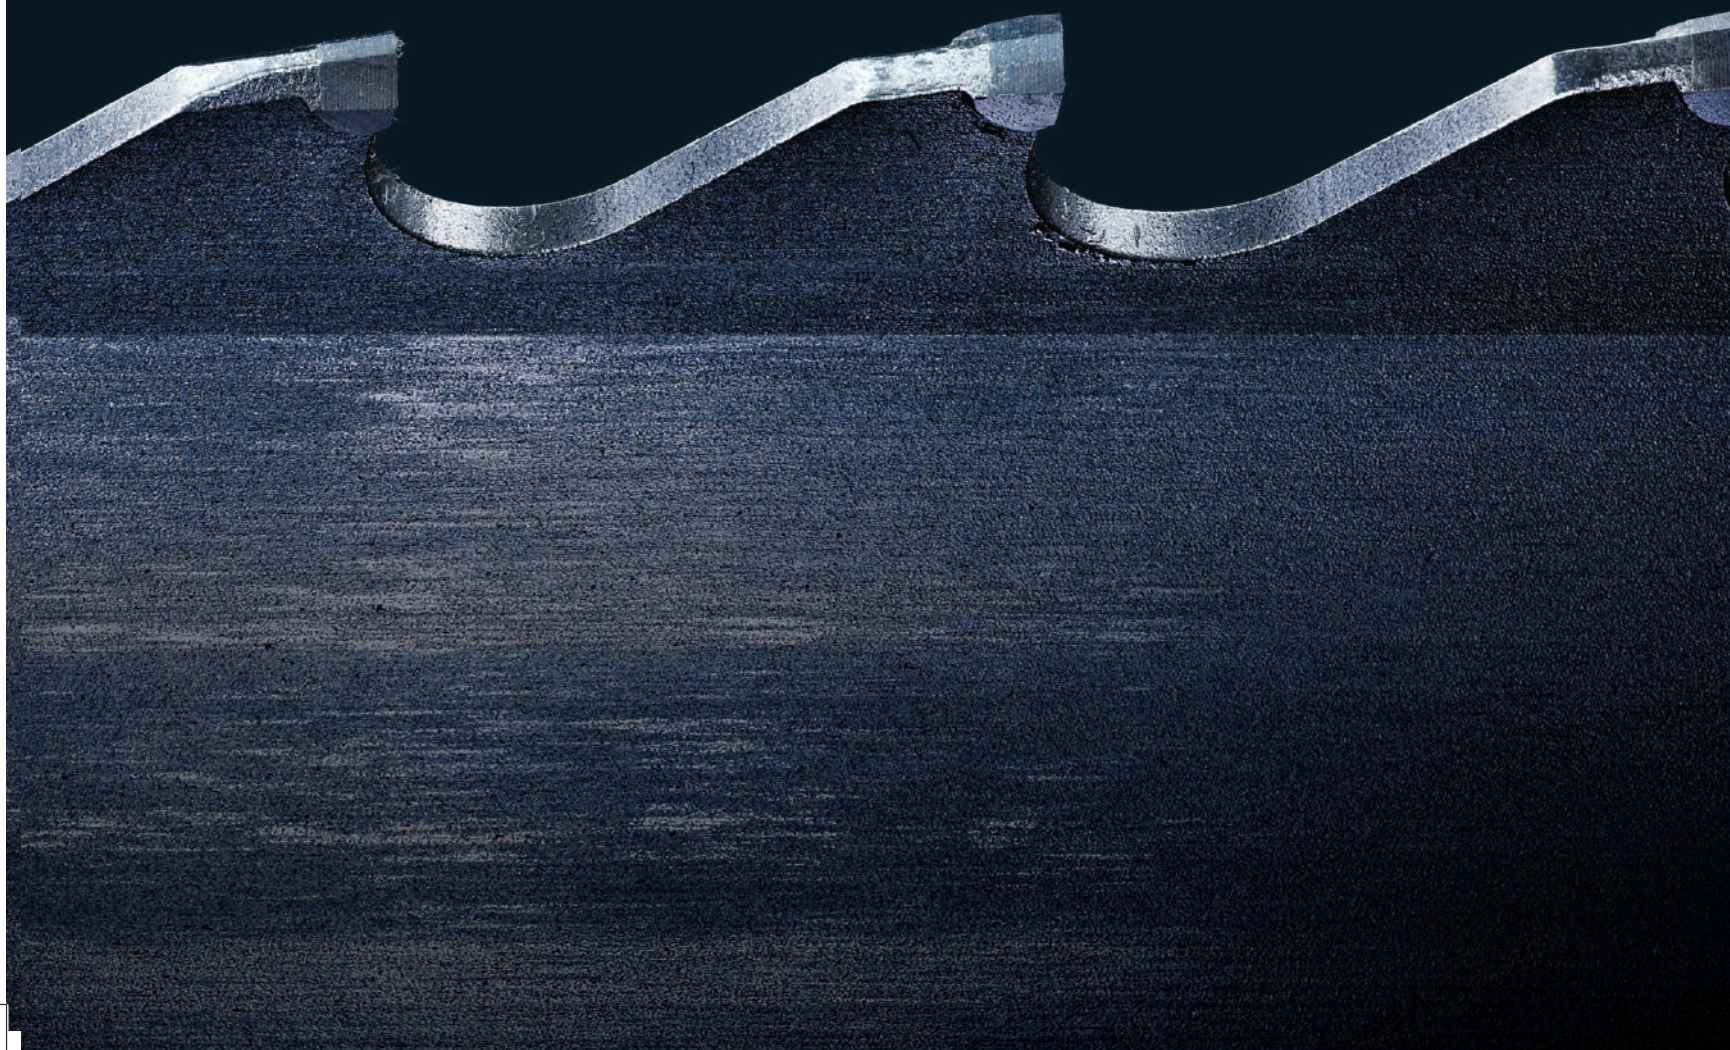



SELECTING CARBIDE TIPPED BAND SAW BLADES

The following information needs to be specified when a band saw blade is ordered:

PRODUCT NAME LENGTH X WIDTH X THICKNESS TEETH PER INCH

For Example: ARMOR® CT BLACK 16' x 1-1/4" x .042" 2.5/3.4 TPI

STEP #1: ANALYZE THE SAWING APPLICATION

Machine: Determine the band size for the machine (Length x Width x Thickness).

Material: Determine the following for the material to be cut:

- Material Type/Grade
- Size
- Shape

Operation: Is this a production, or general purpose sawing operation?

STEP #2: DETERMINE HIGH PERFORMANCE VS. SPECIAL APPLICATION

Use the charts below.

- Locate the type of material to be cut in the top row.
- Read down the chart to find which blade is recommended.

STEP #3: DETERMINE THE PROPER NUMBER OF TEETH PER INCH (TPI)

Use the Carbide Tooth Selection chart on page 15.

If having difficulty choosing between two pitches, the coarser of the two will generally give better performance.

When compromise is necessary, choose the correct TPI first. A general rule for bundles: Determine the correct TPI for the largest continuous cross section.

STEP #4: CONFIRM THE DESIRED PRODUCT IS AVAILABLE

- Go to the product page for the product you have selected.
- Confirm that product is available in the correct blade width and TPI.

HIGH PERFORMANCE										
ALUMINUM/ NON-FERROUS	CARBON STEELS	STRUCTURAL STEELS	ALLOY STEELS	BEARING STEELS	MOLD STEELS	STAINLESS STEELS	TOOL STEELS	TITANIUM ALLOYS	NICKEL-BASED ALLOYS (INCONEL®)	
EASY ←		MACHINABILITY						→ DIFFICULT		
		ARMOR® CT BLACK		ARMOR® CT BLACK Extreme Cutting Rates						
LENOX MAX CT™ CT™						LENOX MAX CT™ Maximum Performance on Aerospace Alloys				
TRI-TECH CT™				TRI-TECH CT Set Style Blade for Difficult to Cut Metals						
VERSA PRO™				VERSA PRO Versatile Carbide Tipped Blade for General Purpose Cutting						
TRI-MASTER®				TRI-MASTER Versatile Carbide Tipped Blade						

SPECIAL APPLICATION				
WOOD	COMPOSITES	ALUMINUM (INCLUDING ALUM. CASTINGS)	CASE HARDENED MATERIALS (INCLUDING IHCP CYLINDER SHAFTS)	OTHER (COMPOSITES, TIRES, ETC.)
EASY ←		MACHINABILITY		→ DIFFICULT
			LENOX <i>HRC</i> Carbide Tipped Blade for Case and Through-Hardened Materials	
<i>Cast MASTER™</i> <i>Cast MASTER™ XL / XLE</i>		Superior Performance When Sawing Castings		
TRI-MASTER				
MASTER-GRIT®		MASTER-GRIT Carbide Grit Edge Blade for Cutting Abrasive and Hardened Materials		

Note: We can provide solutions for many cutting applications not listed here. Please call LENOX Technical Support at 400-820-4548, or go to sawcalc.com.

CARBIDE TOOTH SELECTION

VISIT SAWCALC.COM
FOR CUSTOMIZED BAND SAW RECOMMENDATIONS

LENOX MAX CT™ • LENOX CAST MASTER XL • LENOX CAST MASTER XLE • LENOX VERSA PRO

WIDTH OR DIAMETER OF CUT														
INCHES	1	2	3	4	5	6	7	8	10	11	14	16	18	20+
MM	25	50	75	100	125	150	175	200	250	275	350	400	450	500+
														0.6/0.8
														0.9/1.1
														1.0/1.4
														1.4/2.0
														2/3
														3/4

ARMOR® CT BLACK

WIDTH OR DIAMETER OF CUT														
INCHES	1	2	3	4	5	6	7	8	10	11	14	16	18	20+
MM	25	50	75	100	125	150	175	200	250	275	350	400	450	500
														0.9/1.1
														1.4/1.6
														1.8/2.0
														2.5/3.4

TRI-TECH CT™

WIDTH OR DIAMETER OF CUT														
INCHES	1	2	3	4	5	6	7	8	10	10	14	16	18	20+
MM	25	50	75	100	125	150	175	200	250	275	350	400	450	500+
														0.6/0.8
														0.9/1.1
														1.4/2.0
														1.8/2.0
														2.5/3.4

TRI-MASTER® • LENOX HRC® • CAST MASTER™

WIDTH OR DIAMETER OF CUT											
INCHES	1	2	3	4	5	6	7	8	10	11	
MM	25	50	75	100	125	150	175	200	250	275	
											2/3
											3
											3/4

Note: Aluminum and other soft materials cut on machines with extremely high band speed may change your tooth selection. Please call LENOX Technical Support at 400-820-4548 for more information or go to sawcalc.com.

WHAT IS WAVE TECH™?




This enhanced mechanical design promotes more efficient tooth penetration and chip formation, easily cutting through the work hardened zone. The **WAVE TECH™** symbol denotes any product that can be **WAVED**. Consult your LENOX Technical Representative to determine if **WAVE TECH™** will benefit your operation.





ARMOR® CT BLACK
For Extreme Cutting Rates

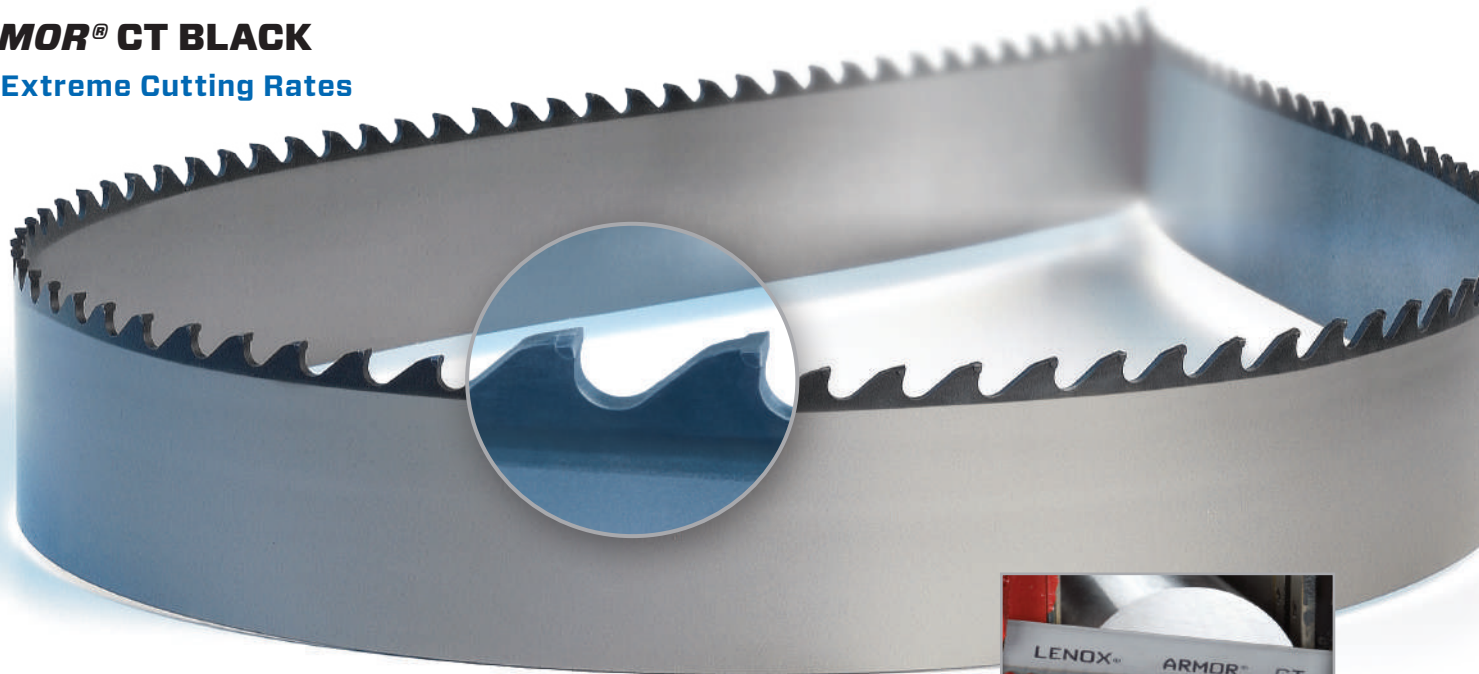

ARMOR COATING PROVIDES FASTER CUTTING AND HIGHER PRODUCTIVITY

Aluminum, Titanium and Nitrogen (AlTiN) combine to form a tough coating that protects each tooth from heat and wear with an armor-like barrier

EXTENDS BLADE LIFE BY PREVENTING HEAT BUILD UP


Improved, thicker coating now forces even more heat into the chips, instead of the blade or workpiece

HIGH PERFORMANCE BACKING STEEL WITH EXCELLENT FATIGUE LIFE

Optimized heat treat and backing steel preparation minimizes premature band breaks

TAILORED TO CUT A WIDE RANGE OF METALS

High quality, Micro Grained Carbide

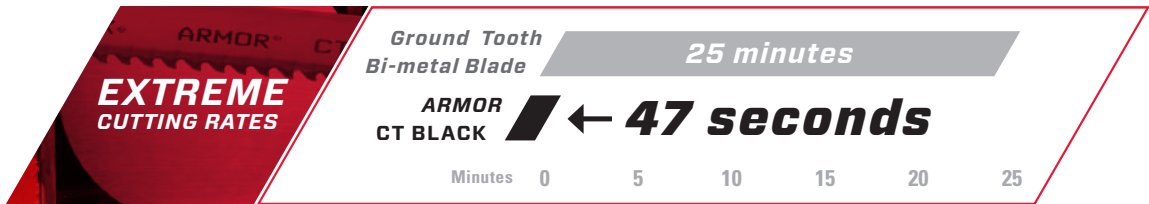

Material: 6-1/2" (165mm) Round 17-4 PH Stainless Steel. Based on internal test results.

WIDTH X THICKNESS		TPI			
IN	MM	0.9/1.1	1.4/1.6	1.8/2.0	2.5/3.4
1-1/4 x .042	34 x 1.07			•	•
1-1/2 x .050	41 x 1.27		•	•	•
2 x .063	54 x 1.60	•	•	•	•
2-5/8 x .063	67 x 1.60	•	•		
3 x .063	80 x 1.60	•			



APPLICATION

Carbon Steels Mold Steels
Alloy Steels Tool Steels
Bearing Steels Titanium Alloys
Stainless Steels Structural Steels



LENOX MAX CT™

Maximum Cutting Performance on Aerospace Alloys

EXCEPTIONAL BLADE LIFE

Multi-chip tooth pattern balances the chip load and reduces cutting forces

Next generation welding technology prevents premature tooth loss

FASTER, STRAIGHTER CUTS

Aggressive rake angles aid in tooth penetration in difficult to cut metals

Optimized gullet geometry increases beam strength for straighter cuts

SUPERIOR PART FINISH

Precision ground carbides create razor sharp teeth for a mirror-like finish on cut parts

WIDTH X THICKNESS		TPI			
IN	MM	0.9/1.1	1.0/1.4	1.4/2.0	2/3
1-1/4 x .042	34 x 1.07				•
1-1/2 x .050	41 x 1.27			•	•
2 x .063	54 x 1.60	•	•	•†	•
2-5/8 x .063	67 x 1.60	•	•	•	
3 x .063	80 x 1.60	•			

†=Extra wide kerf available to prevent blade pinching



TRI-TECH CT™

Set Style Carbide Blade for Difficult to Cut Metals

STRAIGHT CUTS. NO PINCHING

Set style tooth pattern eliminates pinching in high stress metals

Wide kerf clearance enables plunge cutting

PROLONGED BLADE LIFE

High grade carbide tips are precision ground for efficient cutting


High performance backing steel minimizes body breakage

EXTREME VERSATILITY

Cuts a range of materials from high strength steels to Nickel-based alloys

WIDTH X THICKNESS		TPI				
IN	MM	0.6/0.8	0.9/1.1	1.4/1.8	1.8/2.0	2.5/3.4
1-1/4 x .042	34 x 1.07				•	•
1-1/2 x .050	41 x 1.27			•	•	•
2 x .063	54 x 1.60		•	•†	•	•
2-5/8 x .063	67 x 1.60		•†	•†		
3 x .063	80 x 1.60	•	•			


†=Extra heavy set available to prevent blade pinching

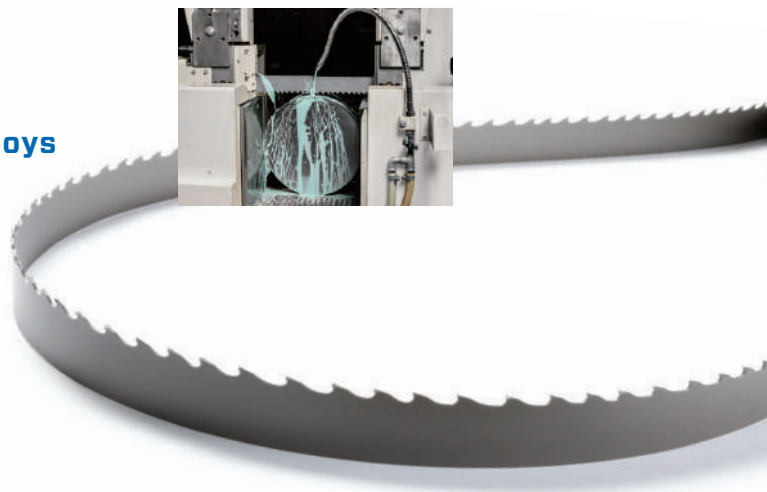

APPLICATION

Aluminum /Non-Ferrous
Stainless Steels
Tool Steels

Titanium Alloys
Nickel-based Alloys

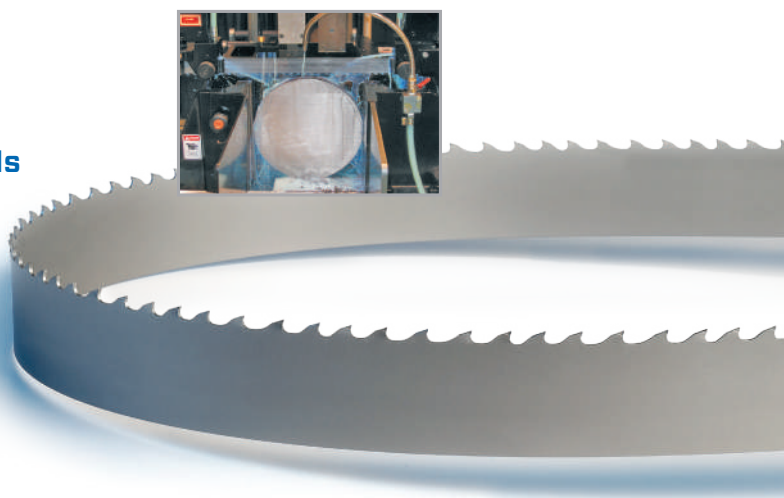

APPLICATION

Nickel-based Alloys
(Inconel®)
Iron Based Super Alloys
Titanium Alloys
High Chrome Alloys

Stainless Steel
Mold and Tool Steels
Aluminum/
Non-Ferrous





VERSA PRO™

Versatile Carbide Tipped Blade for General Purpose Cutting



LONG BLADE LIFE IN A VARIETY OF METALS

Proprietary grade of tungsten carbide tips with increased toughness retain a sharp cutting edge

Multi-chip tooth design balances the chip load and reduces the cutting forces

EASY TO RUN WITH NO BREAK IN*

Pre-honed cutting edge minimizes tooth chipping and eliminates the need to break-in the blade

OUTSTANDING PART FINISH

Precision ground carbide tips have clean, sharp edges that deliver smoother parts

* Break-in recommended for pieces larger than 10" (254mm)



WIDTH X THICKNESS		TPI				
IN	MM	0.9/1.1	1.0/1.4	1.4/2.0	2/3	3/4
1-1/4 x .042	34 x 1.07			•	•	•
1-1/2 x .050	41 x 1.27			•	•	
2 x .063	54 x 1.60	•	•	•	•	
2-5/8 x .063	67 x 1.60	•	•	•		
3 x .063	80 x 1.60	•				



APPLICATION

Aluminum/ Non-Ferrous	Tool Steels
Carbon Steels	Stainless Steels
Bearing Steels	Titanium Alloys
Mold Steels	Nickel-based Alloys
Alloy Steels	(Inconel®)



TRI-MASTER®

Versatile Carbide Tipped Blade

PRECISION TRIPLE CHIP GRIND

Smooth cuts, excellent finish


HIGH PERFORMANCE BACKING STEEL

Excellent fatigue life

GENERAL PURPOSE BLADE

Perfect for cutting of a wide variety of materials

TOOTH FORM WIDTH X THICKNESS		VARI-TOOTH® TPI		STANDARD TPI
IN	MM	2/3	3/4	3
3/8 x .032	9.5 x 0.80			•
1/2 x .025	12.7 x 0.64			•
3/4 x .035	19 x 0.90			•
1 x .035	27 x 0.90	•	•	•
1-1/4 x .042	34 x 1.07	•	•	•
1-1/2 x .050	41 x 1.27	•	•	

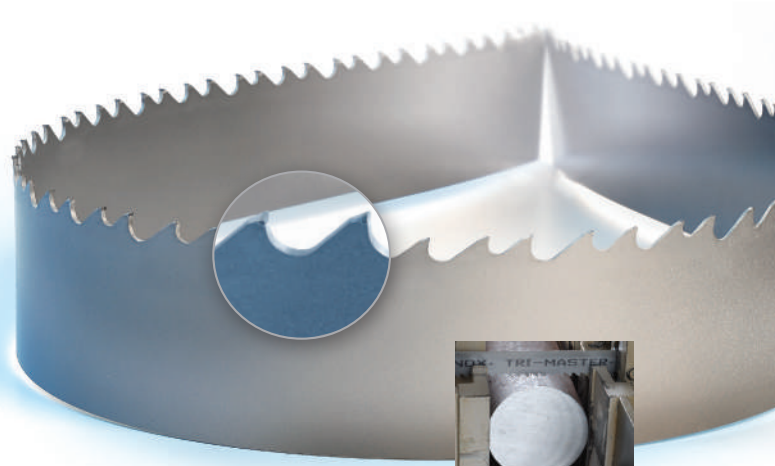

APPLICATION

Aluminum/ Non-Ferrous	Mold Steels
Carbon Steels	Tool Steels
Alloy Steels	Wood
Bearing Steels	Titanium Alloys
Stainless Steels	Nickel-Based Alloys (Inconel®)



CAST MASTER™

Superior Performance When Sawing Castings

EXCEPTIONAL BLADE LIFE IN HAND FED FOUNDRY

APPLICATIONS

Sub-micron grade carbide teeth designed for cutting aluminum and non-ferrous parts

Precision grind on the rake face prevents material build up on tooth edge

CUTS PARTS FREELY WITH LIMITED FEED PRESSURE

Optimized rake angle and narrow kerf enable high speed cutting without pulling the part

Multi-chip tooth design reduces cutting forces and limits vibration


HIGH ALLOY BACKING STEEL INCREASES FATIGUE LIFE

Advanced backing steel preparation minimizes band breaks

WIDTH X THICKNESS		TPI		
IN	MM	2/3	3	3/4
3/4 x .035	19 x 0.90		• *	•
1 x .035	27 x 0.90	•	• *	•
1-1/4 x .042	34 x 1.07	•	•	
1-1/2 x .050	41 x 1.27	•		

• Multi-chip Design

* Set Style (Cast Master SST)

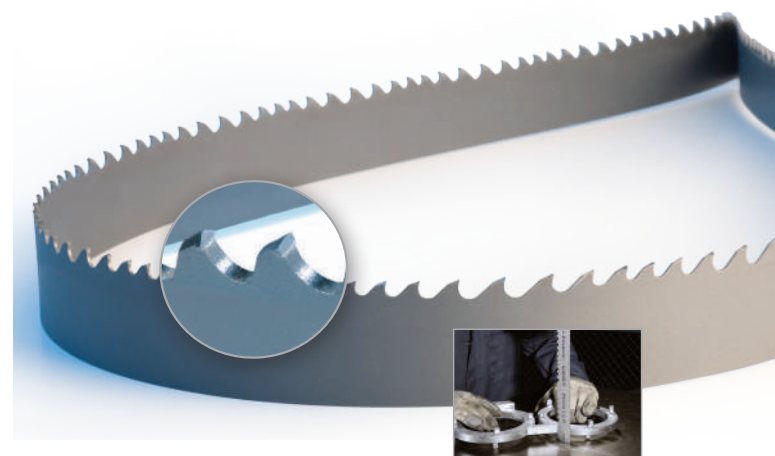

APPLICATION

Aluminum/ Non-Ferrous	Wood
Castings	Composites
Gates & Risers	





LENOX HRC[®]

Carbide Tipped Blade for Case and Through-Hardened Materials

HIGH QUALITY, MICRO-GRAINED CARBIDE

Outstanding durability

STRONG TOOTH DESIGN


Superior edge strength and strip resistance

NEW HIGH PERFORMANCE BACKING STEEL

Excellent fatigue life

REPLACES ABRASIVE CUT-OFF OPERATIONS

TOOTH FORM WIDTH X THICKNESS		VARI-TOOTH [®] TPI		STANDARD TPI
IN	MM	2/3	3/4	3
1 x .035	27 x 0.90			•
1-1/4 x .042	34 x 1.07		•	•
1-1/2 x .050	41 x 1.27		•	
2 x .063	54 x 1.60	•		

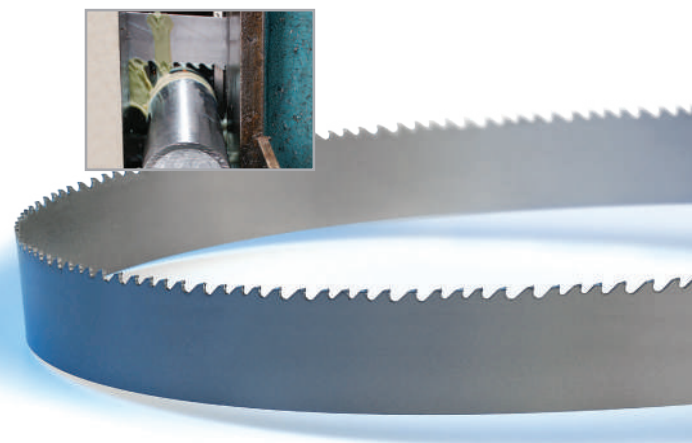

APPLICATION

Carbon Steels
Stainless Steels
Case Hardened Materials



MASTER-GRIT[®]

Carbide Grit Edge Blade for Cutting Abrasive and Hardened Materials

TUNGSTEN CARBIDE PARTICLE GRIT

Metallurgically bonded edge


GULLETED

For applications greater than
1/4" (6.4mm) in cross-section

CONTINUOUS

For applications less than
1/4" (6.4mm) in cross-section


GRIT EDGE PREPARATION WIDTH X THICKNESS		GULLETED			CONTINUOUS	
IN	MM	MED	MED COARSE	COARSE	MED	COARSE
1/4 x .020	6.4 x 0.50				•	
3/8 x .025	9.5 x 0.64	•	•			
1/2 x .025	12.7 x 0.64	•	•		•	
3/4 x .032	19 x 0.80		•	•		
1 x .035	27 x 0.90		•	•	•	•
1-1/4 x .042	34 x 1.07			•		

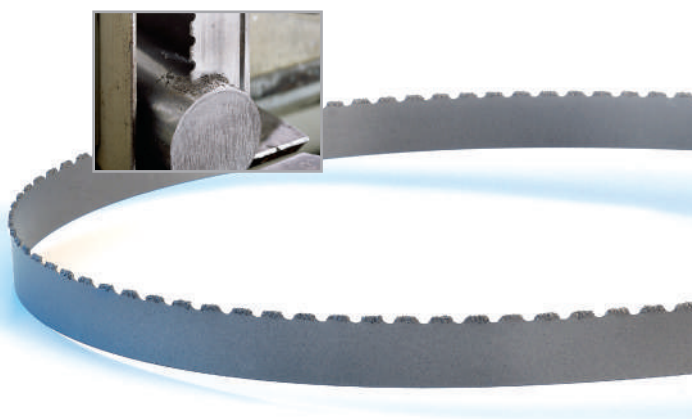

APPLICATION

Case Hardened
Materials

Other:
Fiberglass,
Steel Belted
Radial Tires,
Composites




CARBIDE SPEED CHART

VISIT SAWCALC.COM
FOR CUSTOMIZED BAND SAW RECOMMENDATIONS

FPM = Feet Per Minute | MPM = Meters Per Minute *For metal cutting saws run between 275 and 350 FPM. **Typically for hardened and case hardened carbon steels up to 61 Rc.

MATERIALS		ARMOR® CT BLACK		LENOX TNT CT®		TRI-TECH™		TRI-MASTER®		CAST MASTER™		LENOX HRC®	
TYPE	GRADE	FPM	MPM	FPM	MPM	FPM	MPM	FPM	MPM	FPM	MPM	FPM	MPM
Aluminum Alloys	2024, 5052, 6061, 7075			3,500-8,500*	1000-2600	3,500-8,500	1,000-2,600	3,500-8,500*	1000-2600	3,500-8,500*	1000-2600		
Copper Alloys	CDA 220 CDA 360 Cu Ni (30%) Be Cu			240 300 220 180	75 90 65 55	240 300 220 180	73 91 67 55	210 295 200 160	65 90 60 50	210 295 200 160	65 90 60 50	280	85
Bronze Alloys	AMPCO 18 AMPCO 21 AMPCO 25 Leaded Tin Bronze Al Bronze 865 Mn Bronze 932 937			205 180 115 300 200 220 300 300	60 55 35 90 60 65 90 90	205 180 115 300 180 220 300 300	62 55 35 91 55 67 91 91	180 160 110 290 150 215 280 250	55 50 35 90 45 65 85 75	180 160 110 290 150 215 280 250	55 50 35 90 45 65 85 75		
Brass Alloys	Cartridge Brass Red Brass (85%) Naval Brass			260 230	80 70	240 230	73 70	220 200	65 60			220 200	65 60
Leaded, Free Machining Low Carbon Steels	1145 1215 12L14	370 425 450	115 130 135			290 325 350	88 99 107	290 325 350	90 100 105				
Structural Steel	A36	350	105										
Low Carbon Steels	1008, 1018 1030	310 290	95 90			250 240	76 73	250 240	75 75			270** 250**	80 75
Medium Carbon Steels	1035 1045	285 275	85 85			230 220	70 67	230 220	70 65			240** 230**	75 70
High Carbon Steels	1060 1080 1095	260 250 240	80 75 75									200** 195** 185**	60 60 55
Mn Steels	1541 1524	260 240	80 75										
Cr-Mo Steels	4140 41L50 4150H	300 310 290	90 95 90			220 250	67 76						
Cr Alloy Steels	6150 52100 5160	315 300 315	95 90 95			190 190	58 58						
Ni-Cr-Mo Steels	4340 8620 8640 E9310	300 310 305 315	90 95 95 95			190 190	58 58						
Low Alloy Tool Steel	L-6	300	90	240	75	240	73	190	60				
Water-Hardening Tool Steel	W-1	300	90	240	65	220	67	175	55				
Cold-Work Tool Steel	D-2	240	75	210	65	210	64	170	50				
Air-Hardening Tool Steels	A-2 A-6 A-10	270 240 190	80 75 60	230 220 160	70 65 50	230 220 160	70 67 49	185 175 130	55 55 40				
Hot Work Tool Steels	H-13 H-25	240 180	75 55	220 150	55 45	220 150	67 46	175 120	55 35				
Oil-Hardening Tool Steels	O-1 O-2	260 240	80 75	240 220	75 65	240 220	73 67	190 175	60 55				
High Speed Tool Steels	M-2, M-10 M-4, M-42 T-1 T-15	140 130 120 100	45 40 35 30	110 105 100 80	35 30 30 25	110 105 100 80	34 32 30 24	90 85 80 65	25 25 25 20				
Mold Steels	P-3 P-20	300 280	90 85	200 160	60 50	200 160	61 49	160 130	50 40				
Shock Resistant Tool Steels	S-1 S-5, S-7	220 200	65 60										
Stainless Steels	304 316 410, 420 440A 440C	260 240 290 250 240	80 75 90 75 75	220 180 250 200 200	65 55 75 60 60	190 180 250 200 200	58 55 76 61 61	155 125 175 140 140	45 40 55 45 45			220 180 250 200 200	65 55 75 60 60
Precipitation Hardening Stainless Steels	17-4 PH 15-5 PH	300 300	90 90	160 140	50 45	160 160	49 49	110 100	35 30			160 140	50 45
Free Machining Stainless Steels	420F 301	340 320	105 100	270 230	80 70	270 230	82 70	190 160	60 50			270 230	80 70
Nickel Alloys	Monel® K-500 Duranickel® 301			90 80	25 25	90 80	27 24	90 80	25 25				
Iron-Based Super Alloys	A286, Incoloy® 825 Incoloy 600 Pyromet® X-15			80 75 90	25 25 25	105 85 90	32 26 27	80 75 90	25 25 25				
Nickel-Based Alloys	Inconel® 600, Inconel 718 Nimonic® 90 NI-SPAN-C® 902, RENE® 41 Inconel® 625 Hastalloy B, Waspalloy Nimonic® 75, RENE® 88			85 85 115 75 75	25 25 35 25 25	105 100 105 100 105	32 30 32 30 32	85 85 115 75 75	25 25 35 25 25				
Titanium Alloys	CP Titanium Ti-6Al-4V	230 230	70 70	180 180	55 55	180 180	55 55	150 150	45 45				
Cast Irons	A536 (60-40-18) A536 (120-90-02) A48 (Class 20) A48 (Class 40) A48 (Class 60)	360 175 250 160 115	110 55 75 50 35										



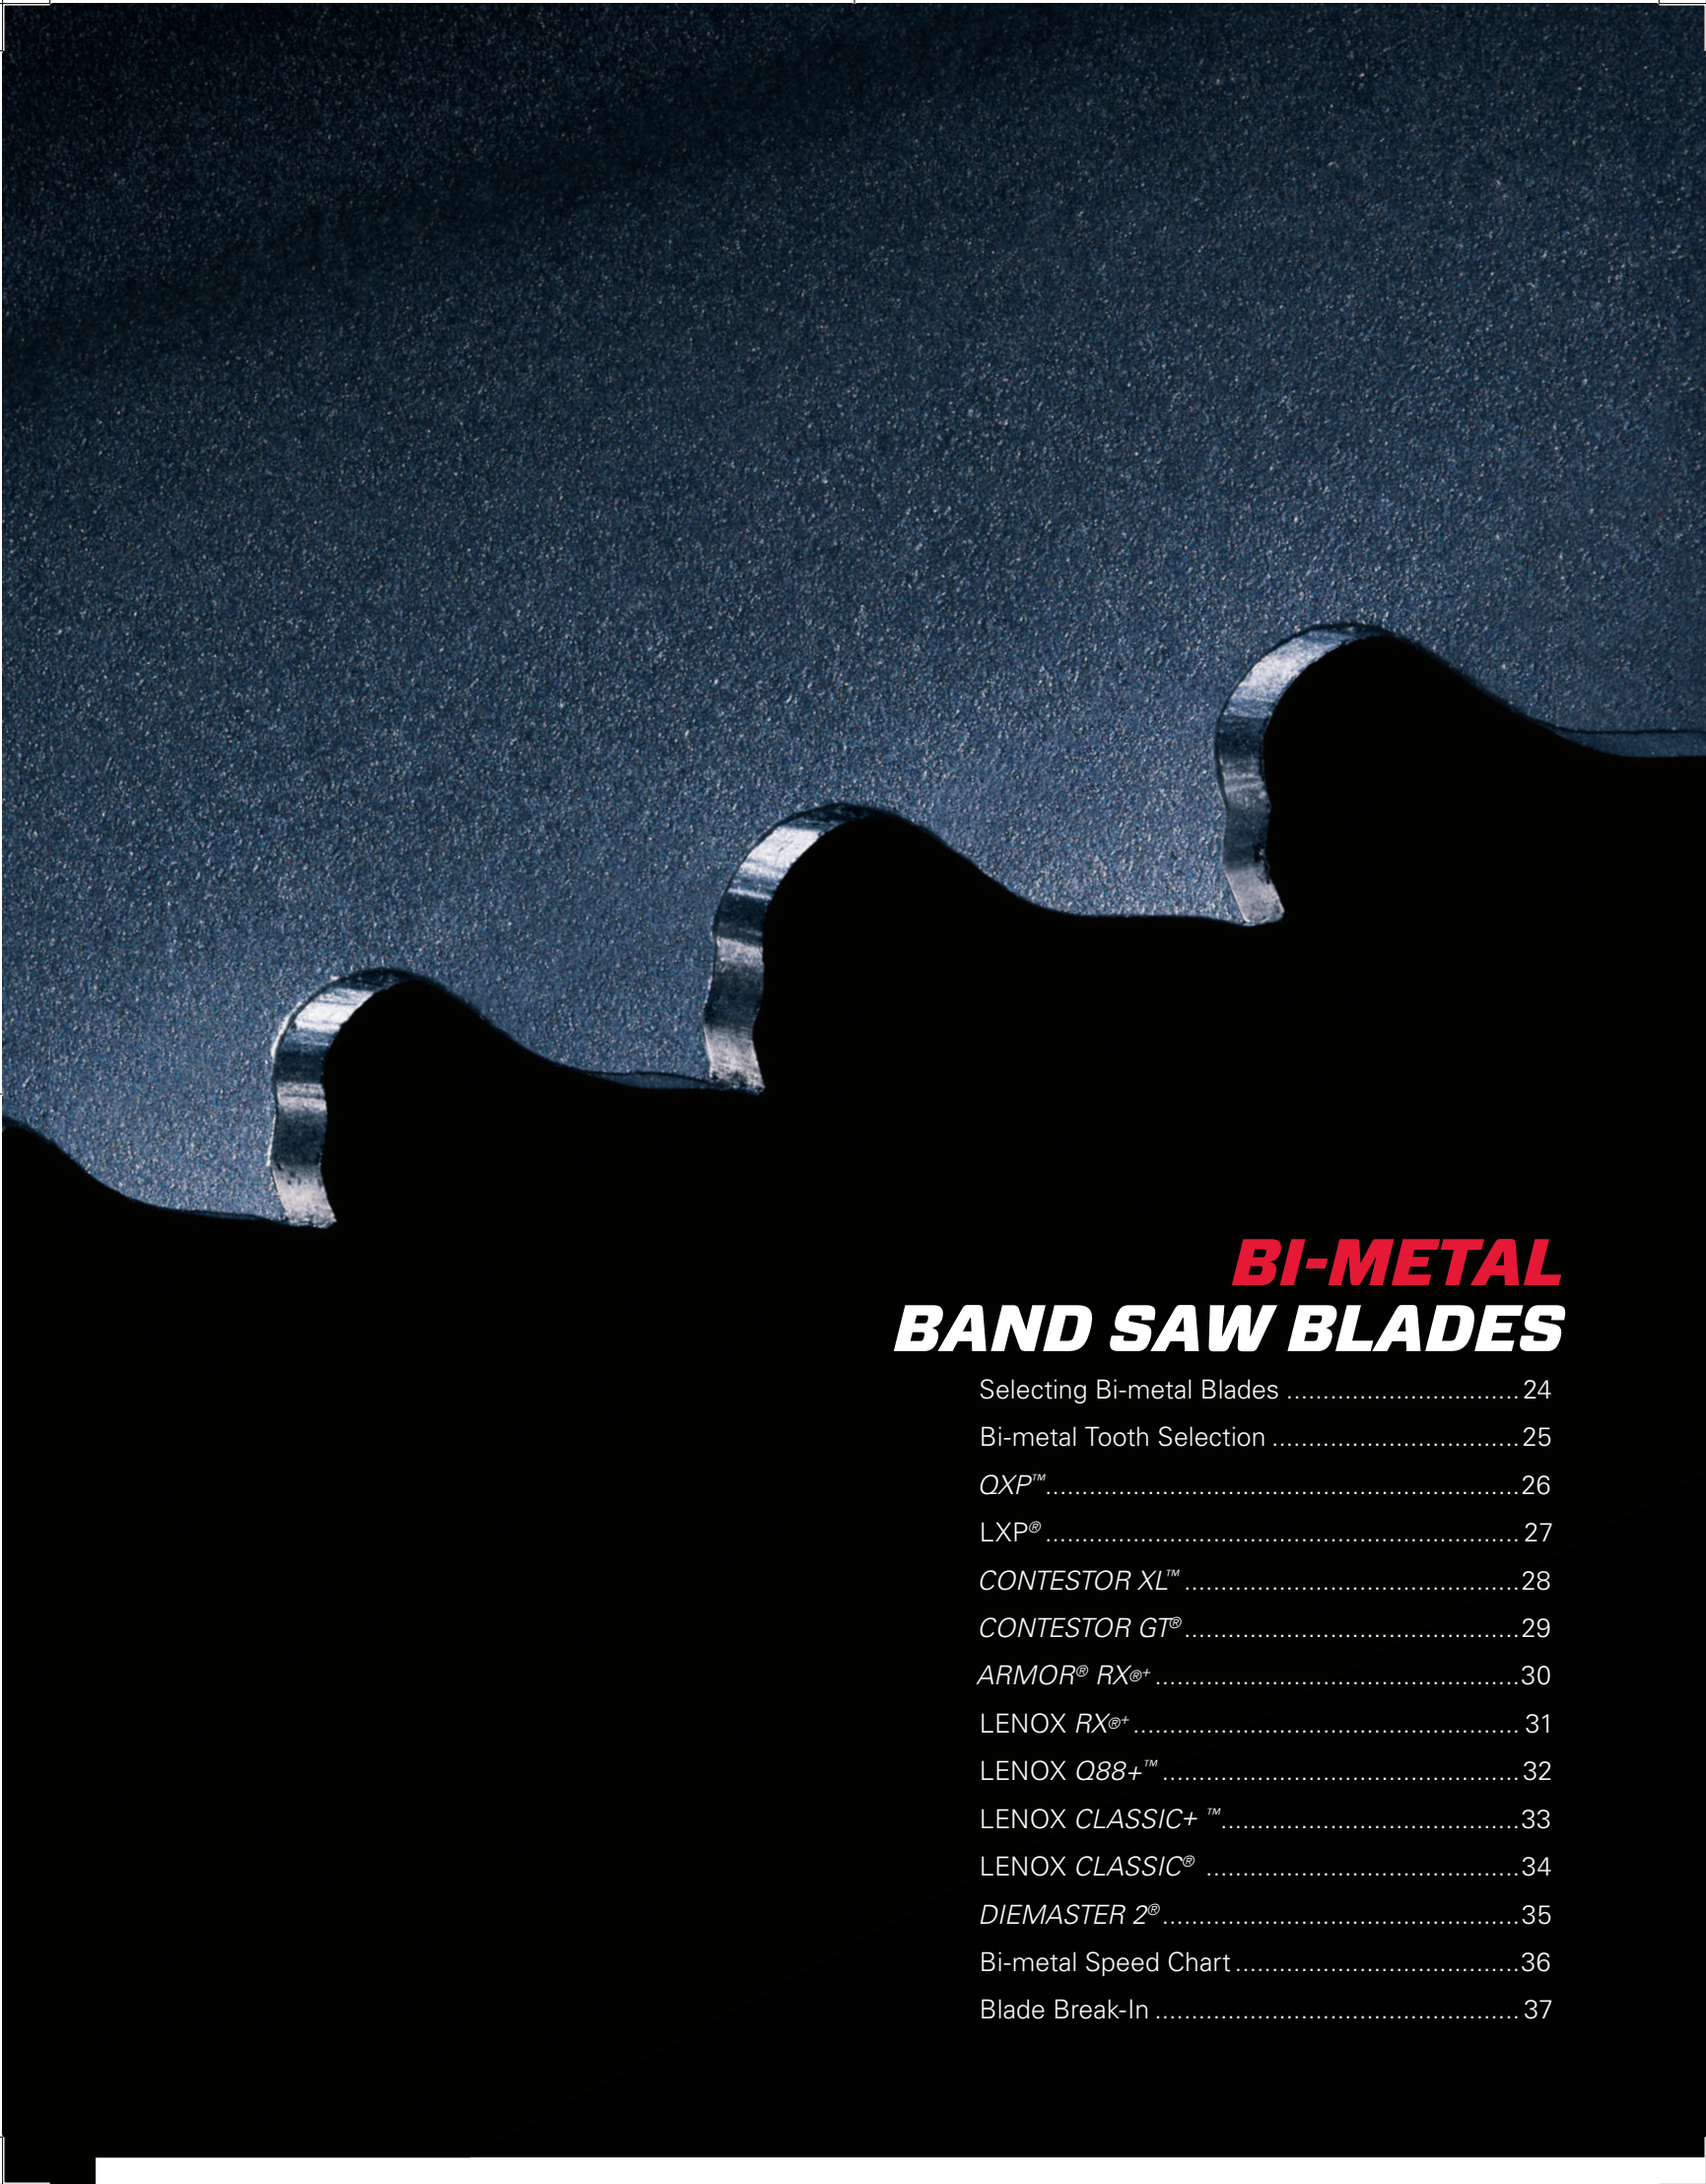

BI-METAL
BAND SAW BLADES

Selecting Bi-metal Blades 24

Bi-metal Tooth Selection 25

QXP™ 26

LXP® 27

CONTESTOR XL™ 28

CONTESTOR GT® 29

ARMOR® RX®+ 30

LENOX RX®+ 31

LENOX Q88+™ 32


LENOX CLASSIC+™ 33

LENOX CLASSIC® 34

DIEMASTER 2® 35

Bi-metal Speed Chart 36

Blade Break-In 37





SELECTING BI-METAL BAND SAW BLADES

The following information needs to be specified when a band saw blade is ordered:

PRODUCT NAME LENGTH X WIDTH X THICKNESS TEETH PER INCH

For Example: Contestor GT® 16' x 1-1/4" x .042" 3/4 TPI

STEP #1: ANALYZE THE SAWING APPLICATION

Machine: Determine the band size for the machine (Length x Width x Thickness).

Material: Determine the following for the material to be cut:

- Material Type/Grade
- Size
- Shape
- Will material be stacked/bundled, or cut one at a time?

Operation: Is this a production, or general purpose sawing operation?

STEP #2: DETERMINE THE BEST PRODUCT FOR THE APPLICATION

Use the charts below.


- Locate the type of material to be cut in the top row.
- Read down the chart to find which blade is recommended.

STEP #3: DETERMINE THE PROPER NUMBER OF TEETH PER INCH (TPI)

- Use the Bi-metal Tooth Selection chart on page 25.

STEP #4: CONFIRM THE DESIRED PRODUCT IS AVAILABLE

- Go to the product page for the product you have selected.
- Confirm that product is available in the correct blade width and TPI.

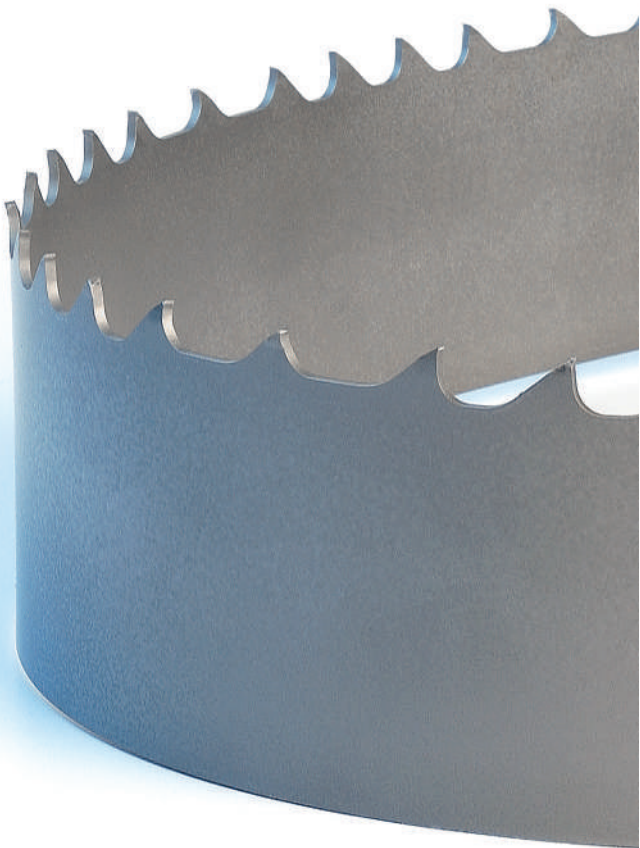

FOR ASSISTANCE, CONTACT LENOX TECHNICAL SUPPORT 400-820-4548.

PRODUCTION SAWING									
ALUMINUM NON-FERROUS	CARBON STEELS	STRUCTURAL STEELS	ALLOY STEELS	BEARING STEELS	MOLD STEELS	TOOL STEELS	STAINLESS STEELS	TITANIUM ALLOYS	NICKEL-BASED ALLOYS (INCONEL®)
EASY		MACHINABILITY						DIFFICULT	
QXP™		QXP™ Long Life. Fast Cutting							
						CONTESTOR GT® Long Life. Straight Cuts			
						CONTESTOR XL™ High Performance Sawing of Large, Difficult to Cut Metals			
LXP®		LXP® Fast Cutting							
		LENOX Rx®+ Structurals/ Bundles							
		ARMOR® Rx®+ Long Life. Structurals/Bundles							
Q88+™ Next Generation Multi-purpose Blade				Q88+™					
CLASSIC® / CLASSIC+™ 3/4" and Wider Blades				CLASSIC® / CLASSIC+™					
DIEMASTER 2® 1/2" and Wider Blades				DIEMASTER 2®					


Note: We can provide solutions for many cutting applications not listed here. Please call LENOX Technical Support at 800-642-0010, or go to sawcalc.com.

BI-METAL TOOTH SELECTION

VISIT SAWCALC.COM
FOR CUSTOMIZED BAND SAW RECOMMENDATIONS

1. Determine the size and shape of material to be cut.
2. Identify the chart to be used (square solids, round solids, or tubing/structurals).
3. Read teeth per inch next to material size.

SQUARE/RECTANGLE SOLID Locate width of cut (W)


	WIDTH OF CUT																		
IN	.1	.2	.3	.4	.5	.6	.7	.8	.9	1	2	5	10	15	20	25	30	35	40
MM	2.5	5	7.5	10	12.5	15	17.5	20	22.5	25	50	125	250	375	500	625	750	875	1000
TPI	14/18	10/14	8/12	6/10	6/8	5/8	4/6	3/4	2/3	1.5/2.0	1.4/2.0	1.0/1.3	0.7/1.0						

ROUND SOLID Locate diameter of cut (D)




	DIAMETER OF CUT																		
IN	.1	.2	.3	.4	.5	.6	.7	.8	.9	1	2	5	10	15	20	25	30	35	40
MM	2.5	5	7.5	10	12.5	15	17.5	20	22.5	25	50	125	250	375	500	625	750	875	1000
TPI	14/18	10/14	8/12	6/10	6/8	5/8	4/6	3/4	2/3	1.5/2.0	1.4/2.0	1.0/1.3	0.7/1.0						

TUBING/PIPE/STRUCTURALS Locate wall thickness (T)





BUNDLED/STACKED MATERIALS:

To select the proper number of teeth per inch (TPI) for bundled or stacked materials, find the recommended TPI for a single piece and choose one pitch coarser to cut the bundle

	WALL THICKNESS																		
IN	.05	.10	.15	.20	.25	.30	.40	.50	.60	.70	.80	.90	1	1.5	2				
MM	1.25	2.5	3.75	5	6.25	7.5	10	12.5	15	17.5	20	22.5	25	37.5	50				
TPI	14/18	10/14	8/12	6/10	6/8	5/8	4/6	3/4	2/3										

WHAT IS POWER BLAST TECHNOLOGY™?

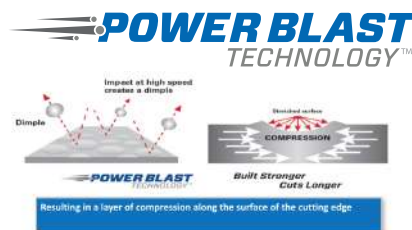

Peening process commonly used in the aerospace and automotive industries to add a layer of compressive stress to the surface of the metal


This prevents cracks from surfacing, which can cause blade failure

LENOX has been peening Band Saw blades for over 9 year



QXP™

Long Blade Life at High Cutting Rates

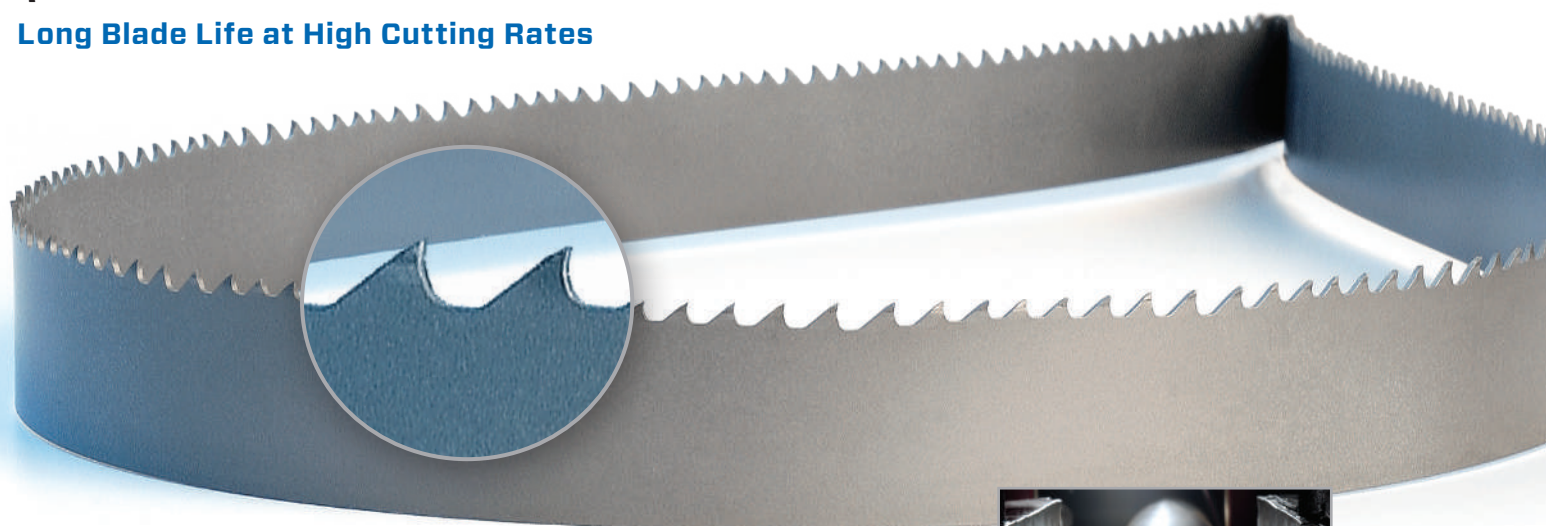

LONG LIFE. FAST CUTTING

Solids of mild to moderate machinability

Proprietary backing steel preparation provides increased fatigue life

PENETRATES WITH LESS FEED FORCE

Extreme positive rake tooth form

INCREASED CUTTING RATES

Deep gullet design



WIDTH X THICKNESS		TPI					
IN	MM	1.0/1.3	1.5/2.0	2/3	3/4	4/6	5/8
1 x .035	27 x 0.90			◆	◆	◆	◆
1-1/4 x .042	34 x 1.07			◆	◆	◆	
1-1/2 x .050	41 x 1.27			◆	◆	◆	
2 x .063	54 x 1.60		◆	◆	◆		
2-5/8 x .063	67 x 1.60	◆	◆	◆			
3 x .063	80 x 1.60	◆					




APPLICATION

Aluminum/ Non-Ferrous	Bearing Steels
Carbon Steels	Mold Steels
Alloy Steels	Stainless Steels
	Tool Steels




LONG LIFE. SMOOTH CUTTING.
BLADE AFTER BLADE. GUARANTEED.*

*The recommended **POWER BLAST TECHNOLOGY™** Blade will outperform your current product or your money back. Contact your LENOX Technical Sales Representative for more information.



LXP®

Extreme Production Rates

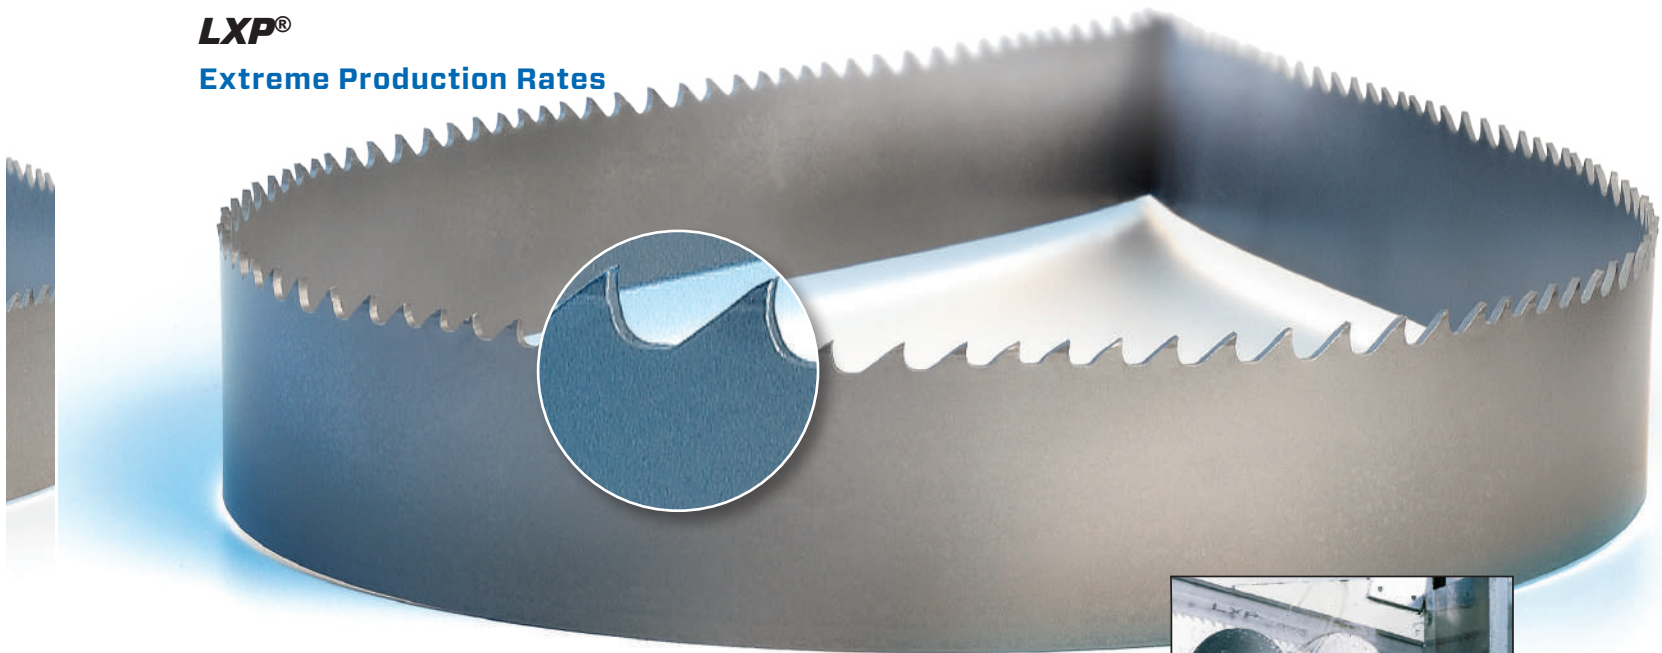

FASTER CUTTING OF SOLID MATERIALS

Extreme positive rake tooth form for easier penetration

Deep gullets for improved chip carrying capacity with less feed force



WIDTH X THICKNESS		TPI					
IN	MM	1.0/1.3	1.5/2.0	2/3	3/4	4/6	5/8
3/4 x .035	19 x 0.90					◆	
1 x .035	27 x 0.90			◆	◆	◆	◆
1-1/4 x .042	34 x 1.07		◆	◆	◆	◆	◆
1-1/2 x .050	41 x 1.27		◆	◆	◆	◆	
2 x .050	54 x 1.27		◆				
2 x .063	54 x 1.60	◆	◆	◆	◆	◆	
2-5/8 x .063	67 x 1.60	◆	◆	◆	◆		
3 x .063	80 x 1.60	◆					



APPLICATION


Aluminum/ Non-Ferrous	Bearing Steels
Carbon Steels	Mold Steels
Alloy Steels	Stainless Steels
	Tool Steels





CONTESTOR XL™

High Performance Sawing of Large, Difficult to Cut Metals

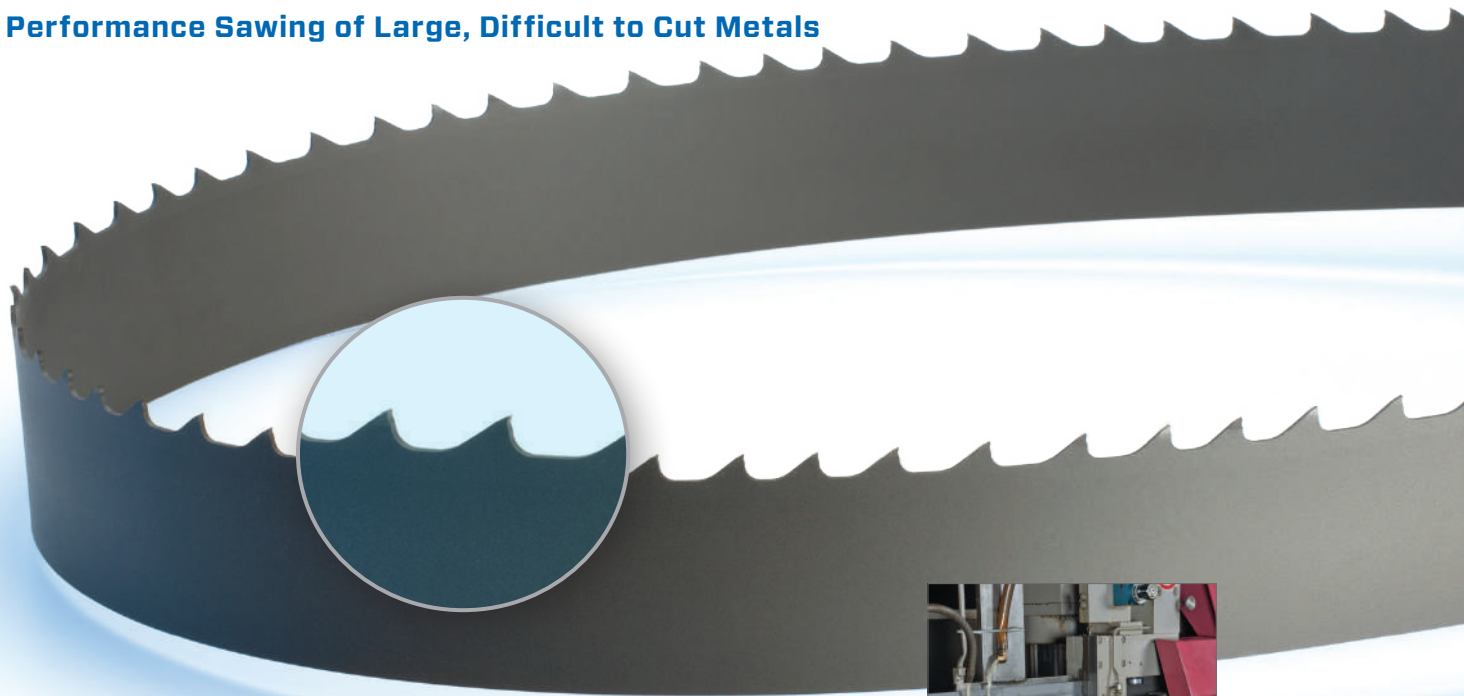

INCREASED WEAR RESISTANCE DELIVERS LONGER BLADE LIFE

New HSS edge wire increases tooth hardness for better abrasive wear resistance

Patent pending chip controlling design reduces heat and wear

IMPROVED CHIP FORMATION HELPS PENETRATE DIFFICULT TO CUT METALS

Variable tooth heights and multi-level set creates longer, narrower chips

High rake angles reduce cutting forces

OPTIMIZED DESIGN FOR STRAIGHTER CUTS ON LARGE BLOCKS

Shallow gullet construction increases beam strength


WIDTH X THICKNESS		TPI					
IN	MM	0.7/1.0	1.0/1.3	1.4/2.0	2/3	3/4	4/6
1-1/4 x .042	34 x 1.07				◆	◆	◆
1-1/2 x .050	41 x 1.27			◆	◆	◆	
2 x .063	54 x 1.60		◆	◆	◆	◆	
2-5/8 x .063	67 x 1.60	◆	◆	◆			
3 x .063	80 x 1.60	◆	◆				



APPLICATION

Mold Steels
Stainless Steels
Tool Steels

Titanium Alloys
Nickel-Based Alloys (Inconel®)



CONTESTOR GT® High Performance Sawing

STRAIGHTER CUTS ON LARGER, DIFFICULT TO CUT MATERIALS
 Unique gullet design for increased beam strength

OPTIMUM CHIP FORMATION IN WORK HARDENING ALLOYS
 Precision ground teeth—smoother tooth face and gullet surfaces
 Patented special set and tooth profile



WIDTH X THICKNESS		TPI					
IN	MM	0.7/1.0	1.0/1.3	1.4/2.0	2/3	3/4	4/6
1 x .035	27 x 0.90				•	•	•
1-1/4 x .042	34 x 1.07			♦	♦	♦	♦
1-1/2 x .050	41 x 1.27			♦	♦	♦	♦
2 x .050	54 x 1.27			♦			
2 x .063	54 x 1.60		♦	♦	♦	♦	
2-5/8 x .063	67 x 1.60	♦	♦	♦	♦		
3 x .063	80 x 1.60	♦	♦	♦			

• = Milled tooth
 ♦ = Ground tooth



APPLICATION


Mold Steels
 Stainless Steels
 Tool Steels

Titanium Alloys
 Nickel-Based Alloys (Inconel®)





ARMOR® Rx®+
Engineered for Long Life

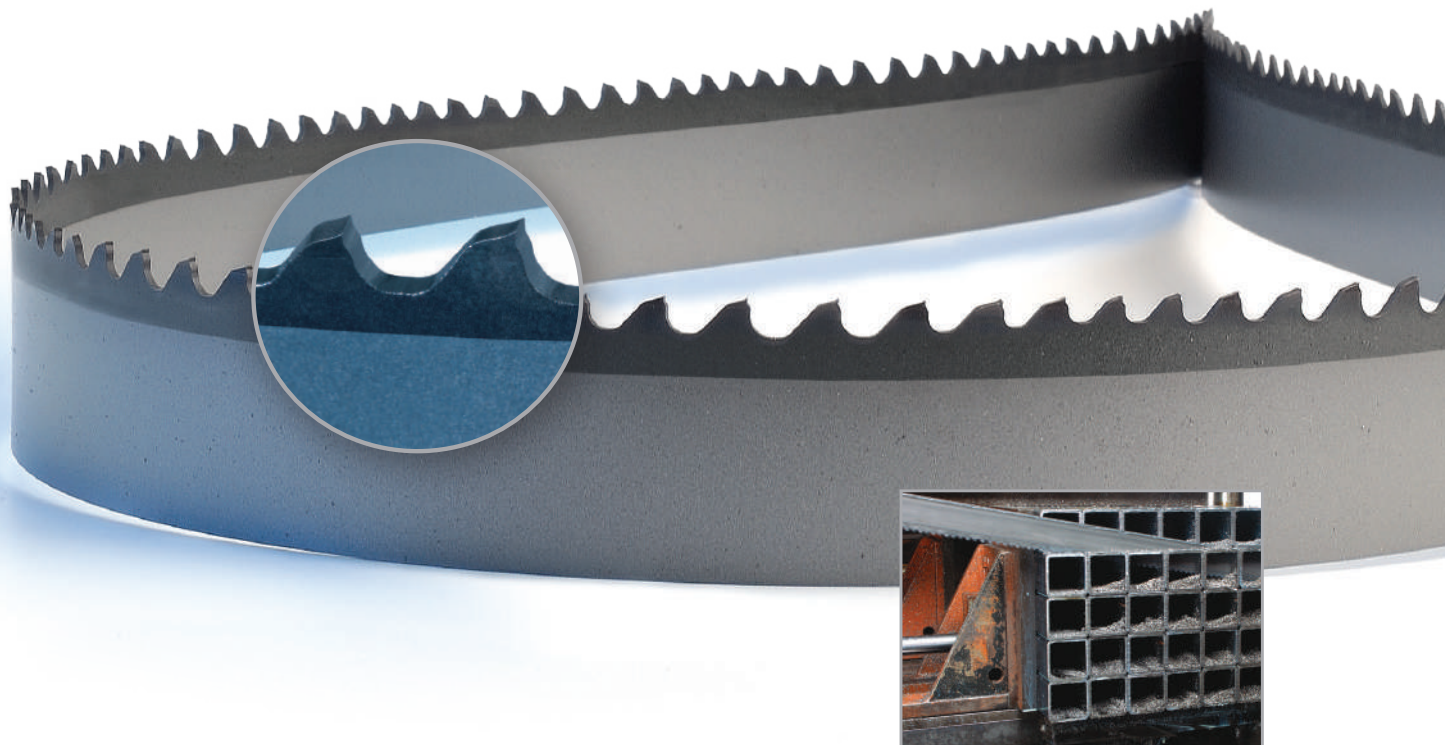

ALTIN COATING FOR PRODUCTIVITY AND LONG BLADE LIFE
Aluminum, Titanium, and Nitrogen combine to form a coating that is hard and tough, protecting each tooth from heat and wear with an armor-like barrier

UNIQUE, PATENTED TOOTH PROFILE
Special, reinforced tooth design for reduced tooth strippage at higher feed rates
Minimized harmonics and vibrations
Quiet cutting


HIGH PERFORMANCE BACKING STEEL
For longer fatigue life

WIDTH X THICKNESS		TPI		
IN	MM	2/3	3/4	4/6
1-1/4 x .042	34 x 1.07	◆†		
1-1/2 x .050	41 x 1.27	◆	◆†	◆†
2 x .063	54 x 1.60	◆	◆†	

† = Extra heavy set available to prevent blade pinching

APPLICATION

Carbon Steels
Structural Steels





Engineered to Cut structurals, tubing and bundles



LONG BLADE LIFE AND EXTREME DURABILITY

Patented tooth profile resists tooth strippage, even at higher feed rates

QUIET CUTTING, REDUCED VIBRATION

Optimized tooth pitch/set sequence

WIDTH X THICKNESS		TPI				
IN	MM	2/3	3/4	4/6	5/8	10/14
5/8 x .032	16 x 0.80					*
3/4 x .035	19 x 0.90			◆	◆	
1 x .035	27 x 0.90	◆	◆	◆	◆	
1-1/4 x .042	34 x 1.07	◆+	◆+	◆+	◆	
1-1/2 x .050	41 x 1.27	◆+	◆+	◆+	◆	
2 x .050	54 x 1.27	◆	◆+	◆	◆	
2 x .063	54 x 1.60	◆+	◆+	◆		
2-5/8 x .063	67 x 1.60	◆+	◆+	◆		

* = Matrix edge

† = Extra heavy set available to prevent blade pinching

APPLICATION


Carbon Steels
Structural Steels





LENOX Q88+™

Next Generation Multi-Purpose Blade

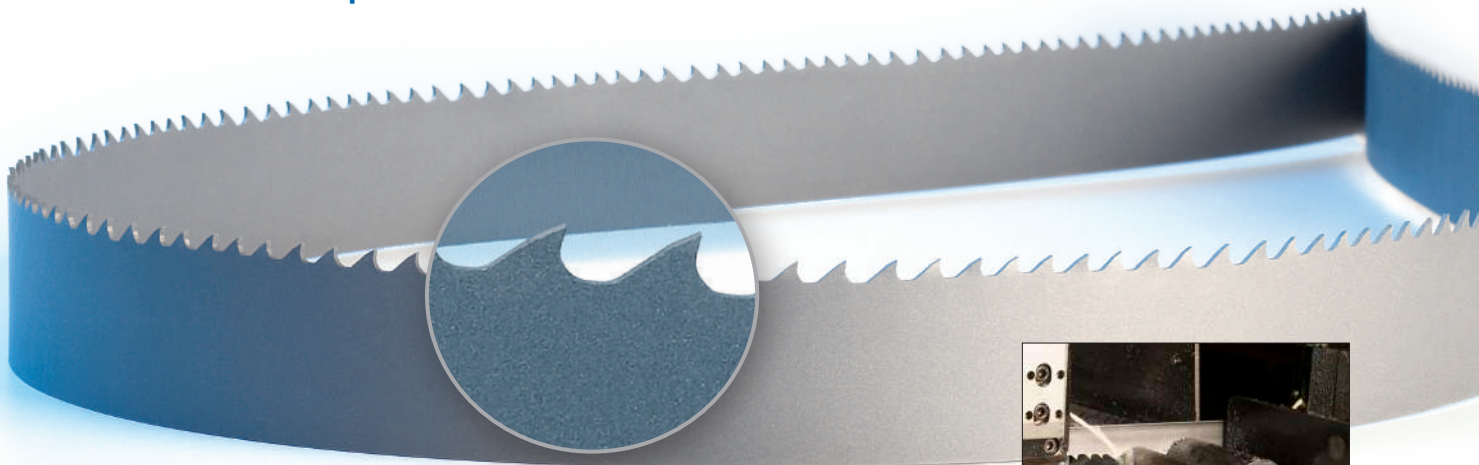

NEXT GENERATION MULTI-PURPOSE BLADE FOR PRODUCTION CUTTING

Cuts a wide range of metals from low carbon steels to higher strength alloys
Smooth, straight cuts when cutting multiple pieces or wide cross sections

EXCEPTIONAL BLADE LIFE

Proprietary Power Blast Technology increases fatigue life & minimizes band breaks

CONSISTENT PERFORMANCE CUT AFTER CUT

Advanced tooth geometry and set minimizes noise & vibration from the very 1st cut

TOOTH FORM WIDTH X THICKNESS		TPI					
IN	MM	1.0/1.3	1.4/2.0	2/3	3/4	4/6	5/8
1 x .035	27 x 0.90			◆	◆	◆	◆
1-1/4 x .042	34 x 1.07			◆	◆	◆	◆
1-1/2 x .050	41 x 1.27		◆	◆	◆ †	◆	
2 x .063	54 x 1.60	◆	◆	◆ †	◆ †		
2-5/8 x .063	67 x 1.60	◆	◆	◆ †			

† = Extra heavy set available to prevent blade pinching

APPLICATION

Carbon Steels Stainless Steels
Alloy Steels Tool Steels
Mold Steels Structural Steels


Aluminum/Non Ferrous



**LONG LIFE. SMOOTH CUTTING.
BLADE AFTER BLADE. GUARANTEED.***

*The recommended **POWER BLAST TECHNOLOGY™** Blade will outperform your current product or your money back. Contact your LENOX Technical Sales Representative for more information.

LENOX CLASSIC+™
Optimized for Multi-Purpose Cutting Applications

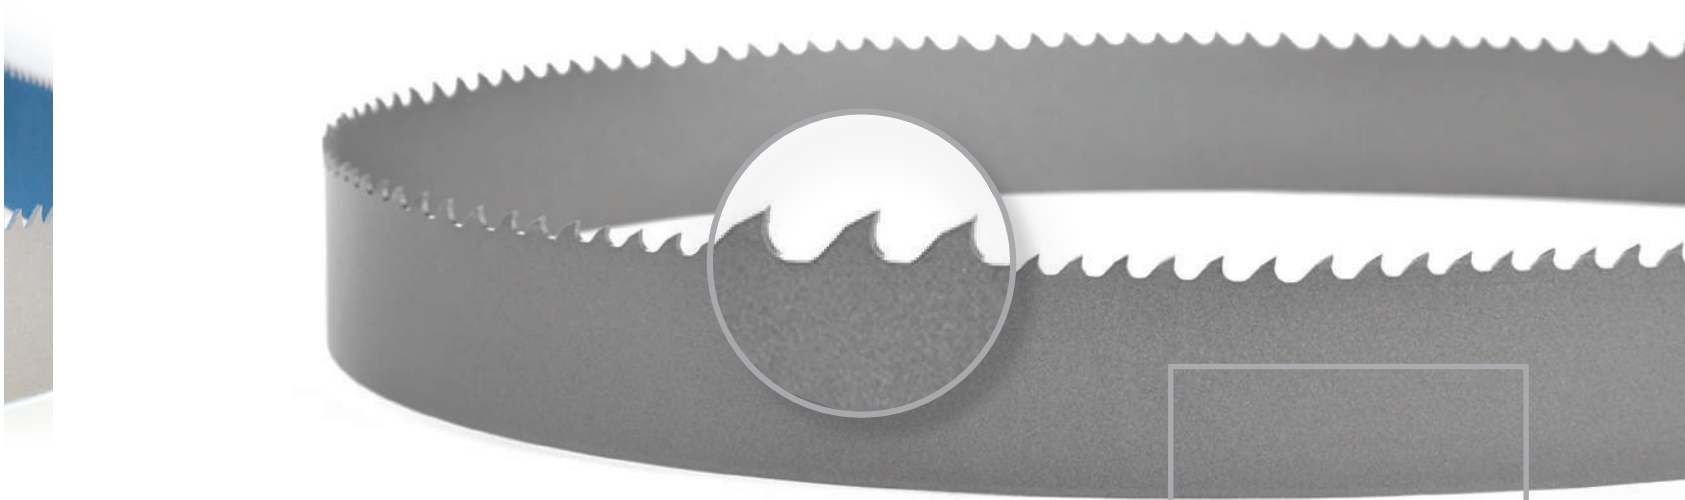

LONG BLADE LIFE IN GENERAL PURPOSE CUTTING APPLICATIONS
POWER BLAST TECHNOLOGY™ strengthens the blade to increase durability

Enhanced chamfer on the back edge of the blade minimizes band breaks

EFFECTIVELY CUTS A WIDE RANGE OF SOLID AND STRUCTURAL METALS

M42 High Speed Steel tooth edge provides superior heat and wear resistance

Advanced tooth geometry and set pattern reduces stripped teeth

EXCEPTIONAL VALUE AND PERFORMANCE

Made in the USA with high quality components

Extended tooth face makes it easier to sharpen



TOOTH FORM WIDTH X THICKNESS		TUFF TOOTH™ TPI		
IN	MM	2/3	3/4	4/6
1 x .035	27 x 0.90	◆	◆	◆
1-1/4 x .042	34 x 1.07	◆	◆	◆
1-1/2 x .050	41 x 1.27	◆	◆	◆

APPLICATION

Carbon Steels	Bearing Steels
Structural Steels	Mold Steels
Alloy Steels	Aluminum/Non-Ferrous





LENOX CLASSIC®
The Ultimate Multi-Purpose Blade



DESIGNED FOR LONG LIFE IN GENERAL PURPOSE CUTTING APPLICATIONS

Patented design reduces tooth strippage
M-42 high speed steel edge for excellent heat and wear resistance

TOOTH FORM		HOOK TPI	POSITIVE RAKE ANGLE/TPI	VARI-TOOTH™				WAVY TPI
WIDTH X THICKNESS				TPI				
IN	MM	3	4/6	5/8	6/10	8/12	10/14	18
3/4 x .035	19 x 0.90	◆	◆	◆	◆	◆	◆	◆
1 x .035	27 x 0.90			◆	◆	◆	◆	
1-1/4 x .042	34 x 1.07				◆	◆		

APPLICATION

Aluminum/
Non-Ferrous
Carbon Steels
Structural Steels
Alloy Steels
Stainless Steels
Tool Steels



DIEMASTER 2®

Engineered for Contour Cutting



FASTER CUTTING WITH M-42 HIGH SPEED STEEL TOOTH EDGE

Runs at twice the speed of carbon blades for faster, easier cutting

LONGER BLADE LIFE

Lasts 10 times longer than carbon blades

FOR GENERAL PURPOSE HAND-FED APPLICATIONS

Tool and die shops, machine shops, maintenance facilities

TOOTH FORM WIDTH X THICKNESS		VARI-TOOTH™ TPI				STANDARD TPI				HOOK TPI		
IN	MM	6/10	8/12	10/14	14/18	10	14	18	24	3	4	6
1/4 x .025	6.4 x 0.64			◆	◆							◆
1/4 x .035	6.4 x 0.90			◆								◆
3/8 x .025	9.5 x 0.64			◆	◆							
3/8 x .035	9.5 x 0.90					◆					◆	◆
1/2 x .025	12.7 x 0.64	◆	◆	◆	◆		◆	◆			◆	◆
1/2 x .035	12.7 x 0.90					◆				◆	◆	◆

APPLICATION

Aluminum/Non-Ferrous

Carbon Steels

Structural Steels

Alloy Steels

Stainless Steels

Tool Steels

Wood



BI-METAL SPEED CHART

VISIT SAWCALC.COM
FOR CUSTOMIZED BAND SAW RECOMMENDATIONS

	MATERIALS		BAND SPEED	
	TYPE	GRADE	FEET/ MIN	METER/ MIN
ALUMINUM / NON-FERROUS	Aluminum Alloys	2024, 5052, 6061, 7075	300+	85+
	Copper Alloys	CDA 220 CDA 360 Cu Ni (30%) Be Cu	210 295 200 160	65 90 60 50
	Bronze Alloys	AMPCO 18 AMPCO 21 AMPCO 25 Leaded Tin Bronze Al Bronze 865 Mn Bronze 932 937	180 160 110 290 150 215 280 250	55 50 35 90 45 65 85 75
	Brass Alloys	Cartridge Brass, Red Brass (85%) Naval Brass	220 200	65 60
CARBON STEELS	Leaded, Free Machining Low Carbon Steels	1145 1215 12L14	270 325 350	80 100 105
	Low Carbon Steels	1008, 1018 1030	270 250	80 75
	Medium Carbon Steels	1035 1045	240 230	75 70
	High Carbon Steels	1060 1080 1095	200 195 185	60 60 55
STRUCTURAL STEEL	Structural Steel	A36	250	75
ALLOY STEEL	Mn Steels	1541 1524	200 170	60 50
	Cr-Mo Steels	4140 41L50 4150H	225 235 200	70 70 60
	Cr Alloy Steels	6150 5160	190 195	60 60
	Ni-Cr-Mo Steels	4340 8620 8640 E9310	195 215 185 160	60 65 55 50
BEARING STEEL	Cr Alloy Steels	52100	160	50
MOLD STEEL	Mold Steels	P-3 P-20	180 165	55 50
STAINLESS STEEL	Stainless Steels	304 316 410, 420 440A 440C	115 90 135 80 70	35 25 40 25 20
	Precipitation Hardening Stainless Steels	17-4 PH 15-5 PH	70 70	20 20
	Free Machining Stainless Steels	420F 301	150 125	45 40
TOOL STEEL	Low Alloy Tool Steel	L-6	145	45
	Water-Hardening Tool Steel	W-1	145	45
	Cold-Work Tool Steel	D-2	90	25
	Air-Hardening Tool Steels	A-2 A-6 A-10	150 135 100	45 40 30
	Hot Work Tool Steels	H-13 H-25	140 90	40 25
	Oil-Hardening Tool Steels	O-1 O-2	140 135	40 40
	High Speed Tool Steels	M-2, M-10 M-4, M-42 T-1 T-15	105 95 90 60	30 30 25 20
	Shock Resistant Tool Steels	S-1 S-5, S-7	140 125	40 40
TITANIUM ALLOY	Titanium Alloys	CP Titanium Ti-6Al-4V	85 65	25 20
NICKEL BASED ALLOY	Nickel Alloys	Monel® K-500 Duranickel 301	70 55	20 15
	Iron-Based Super Alloys	A286, Incoloy® 825 Incoloy® 600 Pyromet X-15	80 55 70	25 15 20
	Nickel-Based Alloys	Inconel® 600, Inconel® 718, Nimonic 90, NI-SPAN-C 902, RENE 41 Inconel® 625 Hastalloy B, Waspalloy Nimonic 75, RENE 88	60 60 80 55 50	20 20 25 15 15
OTHER	Cast Irons	A536 (60-40-18) A536 (120-90-02) A48 (Class 20) A48 (Class 40) A48 (Class 60)	225 110 160 115 95	70 35 50 35 30

The Speed Chart recommendations apply when cutting 4" wide (100mm), annealed material with a bi-metal blade and flood sawing fluid:

ADJUST BAND SPEED FOR DIFFERENT SIZED MATERIALS

MATERIAL	BAND SPEED
1/4" (6mm)	Chart Speed + 15%
3/4" (19mm)	Chart Speed + 12%
1-1/4" (32mm)	Chart Speed + 10%
2-1/2" (64mm)	Chart Speed + 5%
4" (100mm)	Chart Speed - 0%
8" (200mm)	Chart Speed - 12%

ADJUST BAND SPEED FOR DIFFERENT FLUID TYPES

FLUID TYPES	BAND SPEED
Spray lube	Chart Speed - 15%
No fluid	Chart Speed - 30-50%

ADJUST BAND SPEED FOR HEAT TREATED MATERIALS

ROCKWELL	BRINELL	DECREASE BAND SPEED
Up to 20	226	-0%
22	237	-5%
24	247	-10%
26	258	-15%
28	271	-20%
30	286	-25%
32	301	-30%
36	336	-35%
38	353	-40%
40	371	-45%

Reduce band speed 50% when
sawing with carbon blades

BLADE BREAK-IN


Getting Long Life from a New Band Saw Blade

WHAT IS BLADE BREAK-IN?

A new band saw blade has razor sharp tooth tips. In order to withstand the cutting pressures used in band sawing, tooth tips should be honed to form a micro-fine radius. Failure to perform this honing will cause microscopic damage to the tips of the teeth, resulting in reduced blade life.

WHY BREAK-IN A BAND SAW BLADE?

Completing a proper break-in on a new band saw blade will dramatically increase its life.

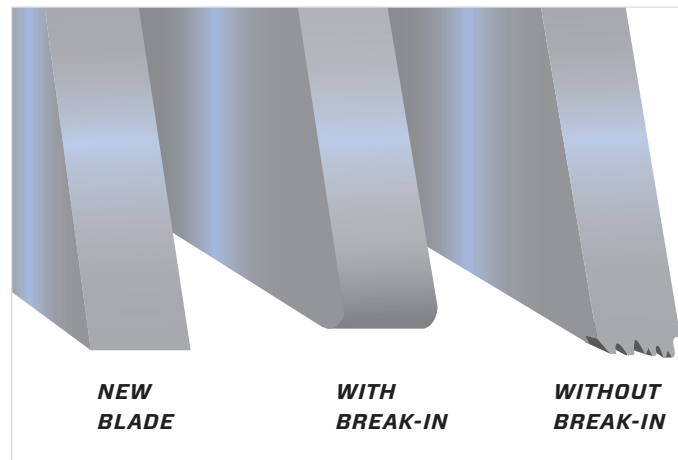

HOW TO BREAK IN A BLADE

Select the proper band speed for the material to be cut (see chart on page 36)

Reduce the feed force/rate to achieve a cutting rate 50% to 80% of normal (soft materials require a larger feed rate reduction than harder materials)


Begin the first cut at the reduced rate. Make sure the teeth are forming a chip. Small adjustments to the band speed may be made in the event of excessive noise/vibration

During the first cut, increase feed rate/force slightly once the blade fully enters the workpiece

With each following cut, gradually increase feed rate/force until normal cutting rate is reached

**FOR FURTHER ASSISTANCE WITH BREAK-IN PROCEDURES,
CONTACT LENOX TECHNICAL SUPPORT 400-820-4548**







WOODMASTER[®] ***BAND SAW BLADES***

Woodmaster[®]C & Woodmaster[®]B39

Woodmaster[®]CT40





WOODMASTER® C

Carbon Steel Blades For Reliable Performance

DELIVERS STRAIGHT CUTS AT HIGH BAND SPEEDS

Engineered for demanding saw mill and resaw applications

BLADES LAST LONGER AND WEAR EVENLY

One piece carbon steel construction with induction hardened tooth tips

FASTER CUTTING AND INCREASED PRODUCTIVITY

Improved beam strength for high feed rates

WIDTH X THICKNESS		KERF	TOOTH SPACING	1/2"	3/4"	7/8"	1"
IN	MM	IN	TPI	2	1.3	1.1	1
1 x .035	27 x 0.90	0.072		◆	◆		
1 x .035	27 x 0.90	0.078		◆	◆		
1-1/4 x .035	34 x 0.90	0.080			◆	◆	◆
1-1/4 x .042	34 x 1.07	0.085		◆	◆	◆	◆
1-1/2 x .042	41 x 1.07	0.085			◆	◆	◆
2 x .035	54 x 0.90	0.090			◆		◆
2 x .045	54 x 1.14	0.091			◆	◆	◆



WOODMASTER® B

Precision Engineered Bi-Metal Blades

CUTS FASTER AND LONGER THAN ONE-PIECE CARBON STEEL BLADES

Two-piece steel construction provides excellent blade life

INCREASED HEAT AND WEAR RESISTANCE

Cobalt rich, high-speed steel tooth tips

INCREASED BEAM STRENGTH FOR LONGER FATIGUE LIFE

Durable spring steel backing material


DELIVERS CONSISTENT, RELIABLE PERFORMANCE

WIDTH X THICKNESS		KERF	TOOTH SPACING	1/2"	3/4"	7/8"	1"	1-1/4"	VARI-TOOTH®
IN	MM	IN	TPI	2	1.3	1.1	1	.78	1.0/1.3
1 x .035	27 x 0.90	0.072		◆	◆				
1-1/4 x .035	34 x 0.90	0.072			◆	◆	◆		
1-1/4 x .042	34 x 1.07	0.080			◆	◆	◆		
1-1/2 x .050	41 x 1.27	0.092				◆			
2 x .042	54 x 1.07	0.085					◆		
2 x .050	54 x 1.27	0.090						◆	
2 x .050	54 x 1.27	0.092							◆
3 x .050	80 x 1.27	0.100						◆	





WOODMASTER® CT
Carbide Tipped Blades For Optimum Performance

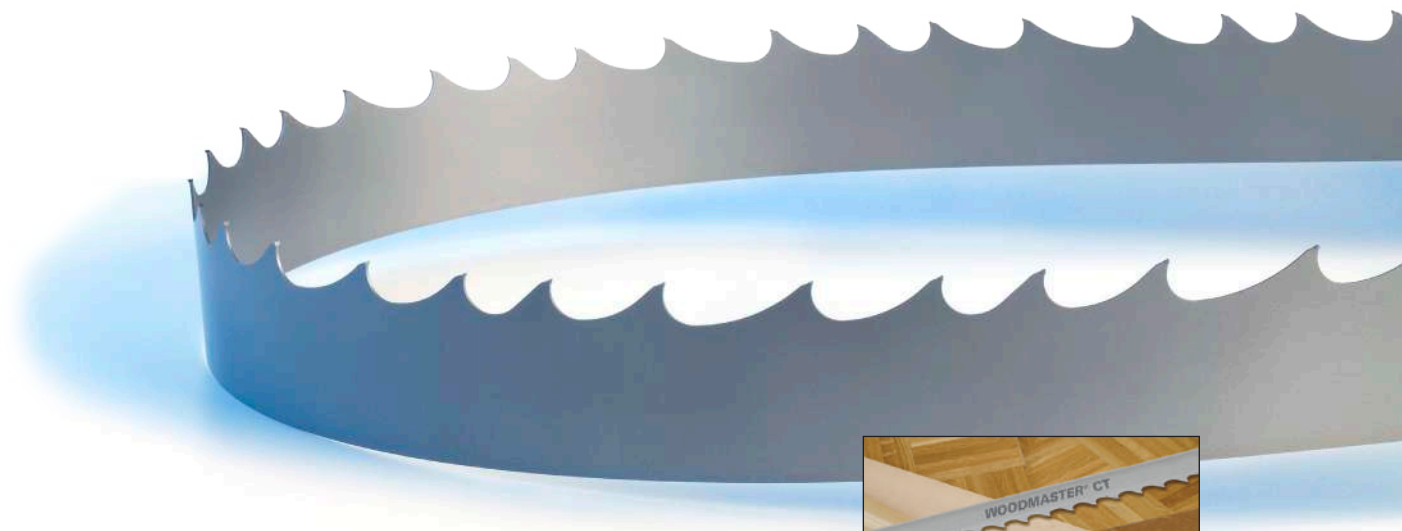

SMOOTH, PRECISE FINISH
Precision ground carbide tooth tips deliver the straightest cuts

ENGINEERED FOR EXTENDED LIFE AND OPTIMAL SPEED
Effectively cuts exotic or difficult to machine wood

IDEAL FOR SPECIALTY WOOD APPLICATIONS
Designed to cut moulding, hardwood flooring, wood siding, paneling and other millwork applications

EXTREME CUTTING RATES. LONGER BLADE LIFE. MAXIMUM PRODUCTIVITY.

WIDTH X THICKNESS		KERF	TOOTH SPACING	1/2"	3/4"	VARI-TOOTH®
IN	MM	IN	TPI	2	1.3	.7/1
1 x .035	27 x 0.90	0.051		◆	◆	
2 x .035	54 x 0.90	0.051			◆	
2 x .035	54 x 0.90	0.065				◆
2 x .042	54 x 1.07	0.072				◆
2 x .042	54 x 1.07	0.085				◆

SAWING AND METAL WORKING FLUIDS

<i>BAND-ADE® & SAW MASTER™</i>	42
Machine Cleaner & LUBE TUBE	43
<i>MICRONIZER® & MICRONIZER, Jr.</i>	44
LENOX <i>LUBE®</i> & C/AI Lube	45
LENOX <i>PROTOOL LUBE®</i> & ANTI-SPATTER...46	
Fluids Reference Chart	47
Tachometer, Blade Alignment Gauge, Tension Meter, Refractometer & <i>TRAVERSE MASTER®</i>	48
<i>SAWCALC®</i>	49



BAND-ADE®

Semi-Synthetic Sawing Fluid

General purpose flood coolant designed for light to moderate-duty machining applications involving both ferrous and non-ferrous metals

EXTENDS BLADE LIFE

Increased lubrication aids in chip formation and evacuation

EXCEPTIONAL COOLING

Water-soluble formulation helps to reduce frictional heat and improves cutting performance

INCREASES PRODUCTIVITY

Faster cutting and reduced machine wear increases efficiency

ENVIRONMENTALLY FRIENDLY

Products are biodegradable, safe for the operator to use, and do not contain harmful chemicals like chlorine and sulphur

SURFACES CAN BE WELDED AND PAINTED OVER

PROD NO	CONTAINER SIZE		CONTAINERS PER CASE
	GALLON	LITER	
68004	1	3.8	4
68005	2-1/2	9.5	2
68003	5	18.9	—
68001	55	208.2 drum	—
68007	275	1,040.9 tote	—

HMIS/WHMIS
HEALTH INDEX – 0
FLAMMABILITY – 0
REACTIVITY – 0
PERSONAL PROTECTION – A

NFPA CODE SPECS



RATIO	REFRACTOMETER
10:1 (10%)	3.5
15:1 (6.7%)	2.6
20:1 (5%)	1.7



Not recommended for use as a spray lubricant. Mix this product with water as recommended

SAW MASTER™

Synthetic Sawing Fluid

Specially formulated flood coolant for light to moderate-duty applications on ferrous metals and alloys

LONGER BLADE LIFE. FASTER CUTTING.

Lubricates and cools to get the most from your blade or tool

REJECTS MOST TRAMP OILS

Unwanted oils can be separated and removed to keep the fluid performing longer

EXCELLENT SUMP LIFE

Advanced anti-microbial agents control bacterial growth and prevent rancidity, which lowers fluid replacement costs

CAN BE USED IN MOST HARD WATER APPLICATIONS

Eliminates filtration problems and residue

SURFACES CAN BE WELDED AND PAINTED OVER

LOW TO NON-FOAMING

PROD NO	CONTAINER SIZE		CONTAINERS PER CASE
	GALLON	LITER	
68064	1	3.8	4
68061	5	18.9	—
68062	55	208.2 drum	—
68063	275	1,040.9 tote	—

HMIS/WHMIS
HEALTH INDEX – 1
FLAMMABILITY – 0
REACTIVITY – 0
PERSONAL PROTECTION – A

NFPA CODE SPECS



RATIO	REFRACTOMETER
5:1 (20%)	6.4
10:1 (10%)	3.2
15:1 (6.7%)	2.4
20:1 (5%)	1.6



Not recommended for use as a spray lubricant. Mix this product with water as recommended

MACHINE CLEANER

Prepares Your Sump for the use of LENOX Sawing Fluids

CLEANS THE MACHINE BETWEEN CHARGES

Eliminates bacteria and fungi

EXTENDS THE LIFE OF THE SAWING FLUID

Helps loosen dirt and contaminants for easier removal and a cleaner system

PREVENTS CONTAMINATION WHEN CONVERTING FLUIDS



PROD NO	CONTAINER SIZE		CONTAINERS PER CASE	NFPA CODE SPECS
	GALLON	LITER		
68006	1	3.8	4	HEALTH 1 FIRE 0 REACTIVITY 0 SPECIAL HAZARD

For industrial use only. Mix this product with water as recommended

LUBE TUBE

Manually Applied Lubricant Stick

EXTREME PRESSURE LUBRICANT

Prevents the build-up of frictional heat

DESIGNED TO BE APPLIED TO BAND SAW BLADES AND OTHER CUTTING TOOLS

Improves overall tool life and productivity when sawing, drilling, milling, grinding, threading and tapping. Works well on abrasives (belts, sanding discs and pads)

CAN BE USED ON FERROUS AND NON-FERROUS METALS, ALUMINUM GATES AND RISERS, PLATES AND EXTRUSIONS

BIODEGRADABLE, NON-TOXIC AND NON-STAINING



PROD NO	CONTAINER SIZE		TUBES PER CASE	NFPA CODE SPECS
	OUNCES	GRAMS		
68020LNx	14.5	411.1	12	HEALTH 0 FIRE 0 REACTIVITY 0 SPECIAL HAZARD



MICRONIZER®

Precision Lubricant Applicator

DESIGNED TO DELIVER A SMALL AMOUNT OF LUBRICANT

Aids in tooth penetration and chip formation, reducing heat and improving tool life

PRECISE FLUID PUMP AND AIR PRESSURE CONTROLS

Ensures the correct amount of lubricant is applied to the tool

A VARIETY OF NOZZLES ARE AVAILABLE

The LENOX Saw Nozzle is recommended for most sawing applications, and is standard on the one line unit (product no 68090)

RECOMMENDED FOR PRODUCTION SAWING OPERATIONS

For larger band saw machines using 1-1/4" (34mm) and wider blades



PROD NO	DESCRIPTION
68090	1 Line Unit w/LENOX Saw Nozzle, 32 oz. (.95 liter) reservoir and manual on/off switch
1770276	1 Line Unit w/Flex Nozzle, 32 oz. (.95 liter) reservoir and manual on/off switch
1770277	1 Line Unit w/Copper Nozzle, 32 oz. (.95 liter) reservoir and manual on/off switch
1770278	1 Line Unit w/LENOX Saw Nozzle, 32 oz. (.95 liter) reservoir and 110V solenoid valve
1770279	1 Line Unit w/LENOX Saw Nozzle, 32 oz. (.95 liter) reservoir and 220V solenoid valve
1770280	1 Line Unit w/Flex Nozzle, 32 oz. (.95 liter) reservoir and 110V solenoid valve
1770401	1 Line Unit w/Copper Nozzle, 32 oz. (.95 liter) reservoir and 110V solenoid valve
1770402	2 Line Unit w/LENOX Saw Nozzle, 32 oz. (.95 liter) reservoir and manual on/off switch
1770403	2 Line Unit w/Flex Nozzle, 32 oz. (.95 liter) reservoir and manual on/off switch
1770188	2 Line Unit w/Copper Nozzle, 32 oz. (.95 liter) reservoir and manual on/off switch
1770406	2 Line Unit w/LENOX Saw Nozzle, 32 oz. (.95 liter) reservoir and 110V solenoid valve
1770407	2 Line Unit w/Flex Nozzle, 32 oz. (.95 liter) reservoir and 110V solenoid valve
1770408	2 Line Unit w/Copper Nozzle, 32 oz. (.95 liter) reservoir and 110V solenoid valve

MICRONIZER, JR.

Lubricant Applicator

PORTABLE DESIGN FOR USE ON MANY APPLICATIONS

Strong mounting magnets hold unit in place, but allow it to be moved to different machines

FOR SMALLER BAND SAW MACHINES & OTHER MACHINE TOOLS

A clean, economical method of providing lubrication

CONVENIENT DESIGN

Choice of two reservoir capacities, 7 oz (200ml) or 37 oz (1.1liter)

SEVERAL NOZZLE STYLES AVAILABLE



PROD NO	DESCRIPTION
68260	7 oz (200ml) Unit with copper nozzle, Shut-off valve and 6' (1.8m) of 1/4" (6mm) tubing
68160	7 oz (200ml) Unit with copper nozzle, Shut-off valve and 6' (1.8m) of 1/8" (3mm) tubing
68258	7 oz (200ml) Unit with flex nozzle, Shut-off valve and 6' (1.8m) of 1/4" (6mm) tubing
68158	7 oz (200ml) Unit with flex nozzle, Shut-off valve and 6' (1.8m) of 1/8" (3mm) tubing
68161	37 oz (1.1 liter) Unit with copper nozzle, Shut-off valve and 6' (1.8m) of 1/4" (6mm) tubing
68159	37 oz (1.1 liter) Unit with flex nozzle, Shut-off valve and 6' (1.8m) of 1/4" (6mm) tubing

LENOX LUBE®

Clean, Synthetic Lubricant for Spray Applications

Advanced formula enables superior cutting performance when Minimum Quantity Lubrication (MQL) is required

EXTENDS TOOL LIFE

Extreme pressure lubricant reduces frictional heat, prevents chip welding, and delivers an excellent workpiece finish

CLEAN AND ENVIRONMENTALLY FRIENDLY

Synthetic, water-based formulation is safe for the shop and operator

REDUCES COSTS

No disposal costs and use only ounces per day

OPTIMUM PERFORMANCE ON FERROUS METALS

Use with our MICRONIZER® systems to lubricate carbon/alloy steels and stainless steels. Works best on pipe and thin-walled tubing

SURFACES CAN BE WELDED AND PAINTED OVER



PROD NO	CONTAINER SIZE		CONTAINERS PER CASE	NFPA CODE SPECS
	GALLON	LITER		
68014	1	3.8	4	HMIS/WHMIS HEALTH INDEX – 0 FLAMMABILITY – 0 REACTIVITY – 0 PERSONAL PROTECTION – A HEALTH 0 FIRE 0 REACTIVITY 0 SPECIAL HAZARD
68018	5	18.9	—	
68017	55	208.2 drum	—	
68016	275	1,040.9 tote	—	

Use this product as it comes from the container – do not mix with water.

C/AI LUBE

High Lubricity Formulation for Spray Applications

Synthetic oil formulated for cutting solids and structurals in a Near Dry Machining (NDM) application

WORKS EFFECTIVELY ON ALL TYPES OF MATERIALS

Use on a variety of steels and non-ferrous metals. Works well on large structural beams, small solids, and all shapes of aluminum (billets, plates and castings)

INCREASED PRODUCTIVITY

Enhances lubrication for higher cutting speeds and feed rates

EXTENDS TOOL LIFE

Enables tooth penetration and chip formation which decreases wear on the machine and blade

CONTROL COSTS

Decreases the volume consumed and lowers replacement costs when used with our MICRONIZER systems



PROD NO	CONTAINER SIZE		CONTAINERS PER CASE	NFPA CODE SPECS
	GALLON	LITER		
68024	1	3.8	4	HMIS/WHMIS HEALTH INDEX – 0 FLAMMABILITY – 1 REACTIVITY – 0 PERSONAL PROTECTION – A HEALTH 0 FIRE 1 REACTIVITY 0 SPECIAL HAZARD
68026	5	18.9	—	
68025	55	208.2 drum	—	
68028	275	1,040.9 tote	—	

Use this product as it comes from the container – do not mix with water.



LENOX PROTOOL LUBE®

Extends Tool Life

A UNIQUE SYNTHETIC EMULSION DESIGNED TO INCREASE TOOL LIFE

For cutting, milling, reaming, tapping and drilling metal, wood and plastics

SHORTENS CUTTING TIME BY UP TO 50%

Provides smoother, cleaner cutting and dramatically longer blade life

REDUCES HEAT AND FRICTION

Water-soluble so it cleans up with water

BIODEGRADABLE AND NON-TOXIC

EASY TO USE, FLIP-TOP BOTTLE FITS IN YOUR TOOL BOX



PROD NO	CONTAINER SIZE		CONTAINERS PER CASE
	GALLON	LITER	
68064	6 oz	.17	12
68061	1	3.8	4
68062	5	18.9	—
68063	55	208.2 drum	—

NFPA CODE SPECS

HMIS/WHMIS
HEALTH INDEX – 1
FLAMMABILITY – 0
REACTIVITY – 0
PERSONAL PROTECTION – A



Use this product as it comes from the container – do not mix with water.

ANTI-SPATTER

Wipe Away Welding Spatter

REDUCE SECONDARY PROCESSING STEPS

Provides lubrication so spatter easily wipes away

SAFE TO USE

Non-toxic, non-explosive, non-combustible, and non-carcinogenic.

No silicone or chlorine. No CFCs.

PROTECTS JIGS AND FIXTURES

IMPROVES WELD JOINTS

SURFACES CAN BE WELDED AND PAINTED OVER



PROD NO	CONTAINER SIZE		CONTAINERS PER CASE
	GALLON	LITER	
69041	33 fl oz	946 ml trigger spray bottle	12
69039	1	3.8	4
69038	5	18.9	—
69037	55	208.2 drum	—

NFPA CODE SPECS

HMIS/WHMIS
HEALTH INDEX – 0
FLAMMABILITY – 1
REACTIVITY – 0
PERSONAL PROTECTION – A



FLUID REFERENCE CHART

Properties and Applications

LENOX® METAL- WORKING FLUID	TYPE			METALS				APPLICATIONS					
	FLOOD COOLANT	SPRAY LUBRICANT	MANUAL APPLICATION	USE WITH SOLID METALS	USE WITH STRUCTURAL METALS	USE WITH FERROUS METALS	USE WITH NON-FERROUS METALS	BAND SAWING	CIRCULAR SAWING	DRILLING	TAPPING	MILLING	GRINDING
BAND-ADE®	•			•	•	•	•	•	•	•		•	
SAW MASTER™	•			•	•	•		•	•	•			•
LENOX LUBE®		•		•	•	•		•	•	•	•	•	•
C/AI LUBE		•		•	•	•	•	•	•	•	•	•	•
LENOX PROTOOL LUBE®			•	•	•	•	•		•	•	•		

LENOX METALWORKING FLUID	CHEMICAL PROPERTIES							
	TYPE	COLOR	BIOCIDES	RUST/ CORROSION INHIBITORS	CONTAINS MINERAL OR PETROLEUM OIL	CONTAINS CHLORINE OR SILICONE	CONTAINS SULFUR/ SULPHONATES	CONTAINS CARCINOGENS
BAND-ADE	Semi-Synthetic	Translucent Pink	Yes	Yes	No	No	No	No
SAW MASTER	Synthetic	Translucent Pink	Yes	Yes	No	No	No	No
LENOX LUBE	Synthetic Emulsion	Translucent Green	Yes	Yes	No	No	No	No
C/AI LUBE	Synthetic Oil	Translucent Blue	No	Yes	No	No	No	No
LENOX PROTOOL LUBE®	Synthetic Emulsion	Translucent Yellow	Yes	Yes	No	No	No	No

LENOX METAL REMOVAL FLUID	PHYSICAL PROPERTIES						
	SOLUBILITY IN WATER	SPECIFIC GRAVITY (H ₂ O=1)	pH RANGE	VISCOSITY AT 72°F	FLASH POINT	FREEZING POINT	BOILING POINT
BAND-ADE	100%	1.02	8.8 - 9.2	43 SUS	None	-6°C/21°F	99°C/210°F
SAW MASTER™	100%	1.076	9.7 - 10.0	42.7 SUS	None	-12°C/10°F	99°C/210°F
LENOX LUBE	100%	1.015	7.8 - 8.2	60 SUS	None	-7°C/19°F	99°C/210°F
C/AI LUBE	Insoluble	0.823	N/A	121 SUS	COC 290°F	N/A	N/A
LENOX PROTOOL LUBE	100%	1.03	8.0 - 8.5	500 SUS	None	-25°C/-13°F	99°C/210°F

DILUTION RATIO*	FLUID CONTENT	WATER CONTENT	APPLICATIONS
5:1	20%	80%	Heavy-duty sawing, difficult milling
10:1	10%	90%	Moderate to heavy-duty sawing, drilling, tapping and milling
20:1	5%	95%	Light-duty work
30:1	3%	97%	Grinding, light-duty work

*Dilution ratios are for flood coolants only.
LENOX recommends 5:1 or 10:1, depending
on the severity of the operation



TACHOMETER

Accurate Band Speed Measurement

Running at the proper band speed is essential for optimum tool life. Use this precision tool to calibrate band saw machine internal tachometer. Check band speeds on machines that don't have a tachometer



PROD NO	DESCRIPTION
62139	Tachometer

TENSION METER

Measures Band Tension

Properly tensioned band saw blades cut straighter, longer. Durable construction: made with lightweight cast aluminum. Easy to use: attach to blade, apply tension and read the PSI



PROD NO	DESCRIPTION
62126	Tension Meter

BLADE ALIGNMENT GAUGE

For Straight Cutting

Proper alignment is critical for straight cutting. Using this gauge allows for easy measurement of blade alignment, so proper adjustment of band guide assemblies can be made. Easy to use: clip the blade alignment to the back of the blade and use a machinist's square to see if the blade is perpendicular to the bed



PROD NO	DESCRIPTION
62125	Blade Alignment Gauge

TRAVERSE MASTER®

Measures and Reports Feed Rate

Optimize chip loads to achieve fast cutting without detrimental effects on blade life. Accurately achieve cutting rates recommended by LENOX SAWCALC®. Precision meter: provides readout of feed rate in inches (or millimeters) per minute. Powered by a 12v DC power supply or rechargeable battery pack (both included)



PROD NO	DESCRIPTION
62140	Traverse Master
62141	Traverse Master

(includes international plug adaptor)

REFRACTOMETER

Measures Sawing Fluid Concentration

IMPROVE FLUID EFFECTIVENESS

Maintaining the proper water to fluid ratio increases tool life and ensures longer fluid performance

EASY TO USE AND CALIBRATE

Calibrate with a drop of water, put a small amount of sawing fluid in the refractometer. A quick look through the lens shows the fluid ratio.

PROD NO	DESCRIPTION
68012	Refractometer



SAWCALC®

Cut Smart with SawCalc - Web-Enabled Solution for Your Cutting Challenges

CUSTOMIZED, ACCURATE RECOMMENDATIONS TO OPTIMIZE BLADE LIFE

Identify the right LENOX blade for the job

Determine the correct parameters to satisfy your cutting goals

HIGHLY TECHNICAL, ENGINEERED SOLUTIONS


Built-in intelligence based on years of engineering experience


Over 35,000 metals and 9,000 band saws inside the program


FREE, EASY TO USE AND ALWAYS UPDATED

SAWCALC is updated regularly to include the latest machines, metals, and LENOX products


VISIT SAWCALC.COM
TO GET YOUR RECOMMENDATION TODAY!

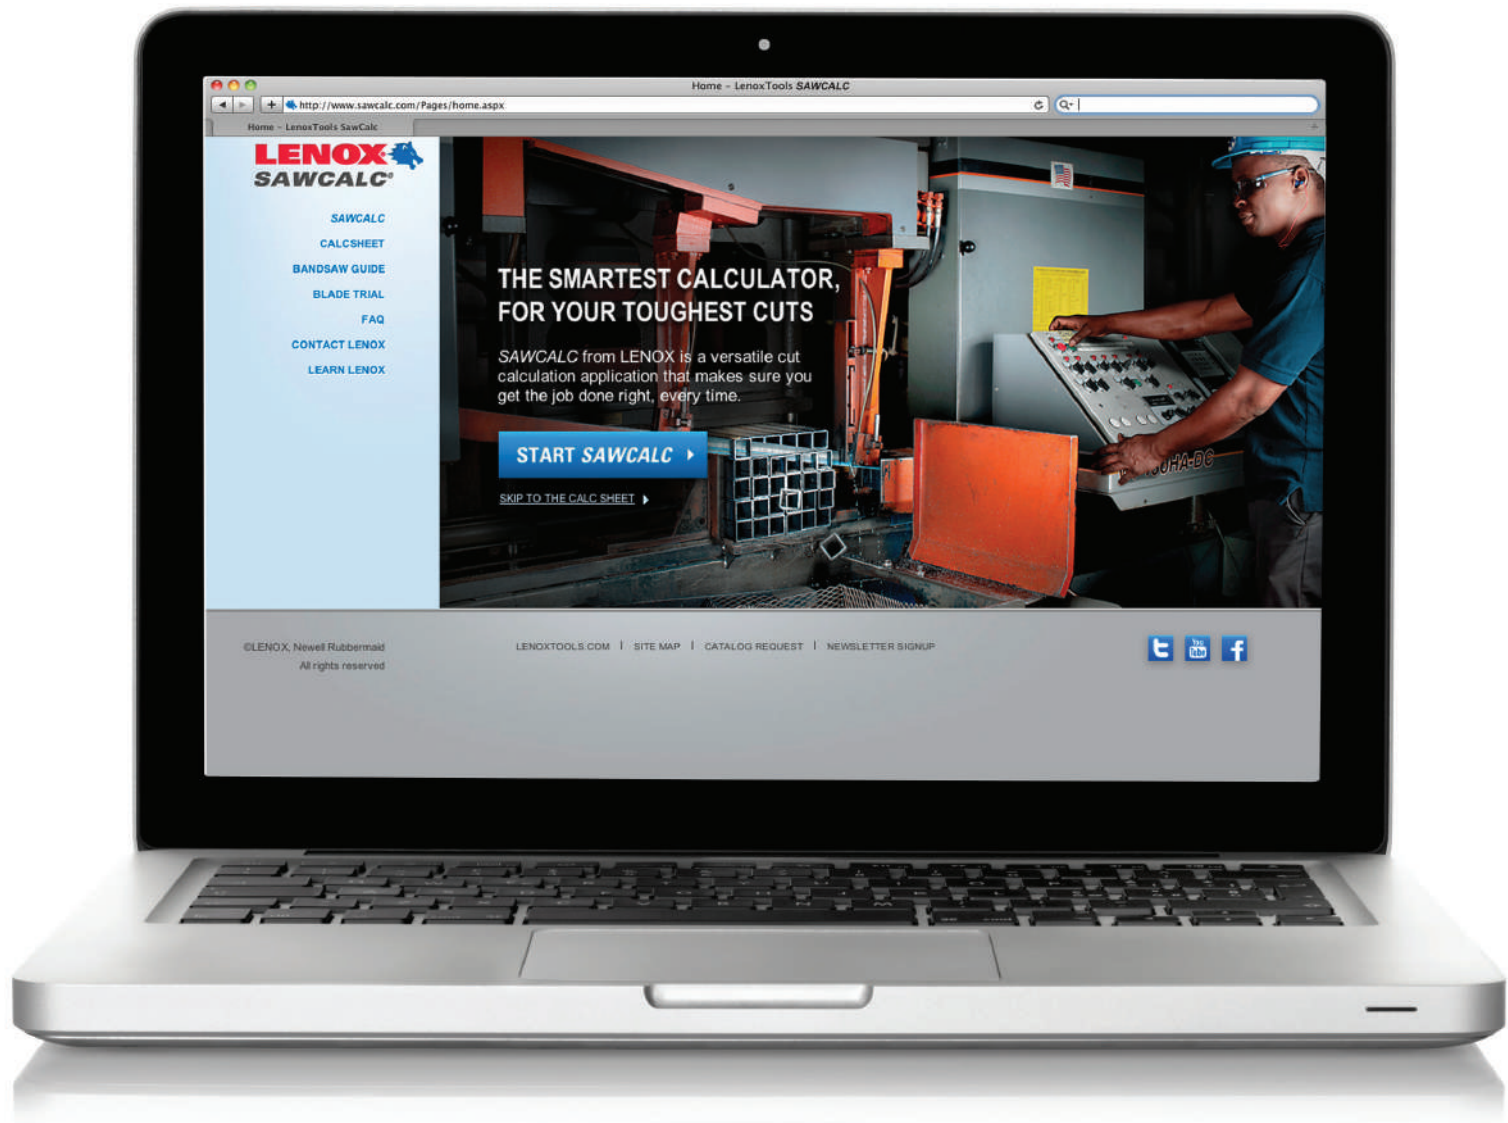







POWER ***TOOL*** ***ACCESSORIES***







RECIPROCATING SAW BLADES



T3 RECIPROCATING SAW BLADES

HISTORY OF RECIP LEADERSHIP	54
LENOX <i>Gold</i> ® POWER ARC™	55
DEMOLITION CT™ & DEMOLITION	56
LAZER®	57
BI-METAL	58
LENOX <i>DIAMOND</i> ™ & Carbide Grit & Extra Sharp Fleam Ground	59
RECIPROCATING SAW BLADE KITS	60
Blade, TPI & Blade Length Selection Guides	61
Cross Reference Chart	62
MASTER-BAND™ & WOLF-BAND® Portable Bands	64



HISTORY OF RECIP LEADERSHIP

LENOX has defined performance in the reciprocating saw blade category since inventing the first bi-metal reciprocating saw blade in 1977. LENOX has used its century of cutting expertise to lead the way in recip performance and is redefining performance levels in the bi-metal reciprocating category with the introduction of *POWER BLAST TECHNOLOGY™*.

LENOX RECIPROCATING SAW BLADES



POWER BLAST TECHNOLOGY™ Built Stronger Cuts Longer™

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durability



DEMOLITION CT™ up to **5x LIFE**

LENOX is also extending its performance leadership with the introduction of *DEMOLITION CT* carbide tipped reciprocating saw blades for tough nail-embedded wood applications



Additional information on these new blades can be found in the following pages.

LENOX Gold® POWER ARC™ **RECIPROCATING SAW BLADES**

POWER ARC CURVED BLADE

Delivers up to 2X longer life vs. traditional straight LENOX reciprocating saw blades

AGGRESSIVE BLADE DESIGN


Optimizes the blade's angle of attack for faster cutting in a variety of materials

EXTENDED BLADE LIFE

T2™ Technology and precision applied titanium coating help dissipate heat making blades last longer

FASTER CUTS

Titanium coating makes teeth more wear-resistant so they stay sharp for quicker cuts

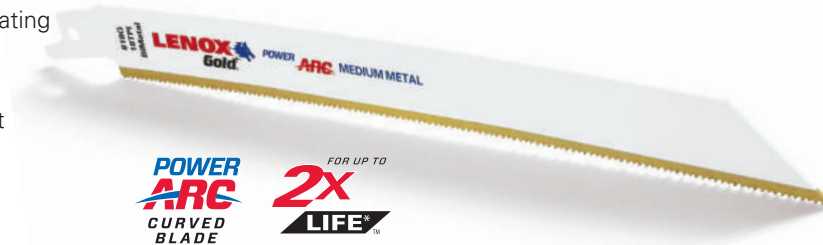

	TPI	LENGTH X WIDTH X THICKNESS		5-PACK PROD NO	25-PACK PROD NO	APPLICATION
		IN	MM			
EXTREME METAL CUTTING	8	6 x 1 x .042	152 x 25 x 1.07	210926108GR	—	
	8	9 x 1 x .042	229 x 25 x 1.07	210969108GR	—	
	10	6 x 1 x .042	152 x 25 x 1.07	210936110GR	21225B6110GR	
	10	9 x 1 x .042	229 x 25 x 1.07	210979110GR	21229B9110GR	
	10	12 x 1 x .042	305 x 25 x 1.07	2110012110GR	—	
	14	6 x 1 x .035	152 x 25 x .9	210946114GR	21226B6114GR	
	14	9 x 1 x .035	229 x 25 x .9	210989114GR	21235B9114GR	
	14	12 x 1 x .042	305 x 25 x 1.07	2110112114GR	21238B12114GR	
	18	6 x 1 x .035	152 x 25 x .9	210956118GR	21227B6118GR	
	18	9 x 1 x .035	229 x 25 x .9	210999118GR	21236B9118GR	
	18	12 x 1 x .042	305 x 25 x 1.07	2110212118GR	21239B12118GR	
DEMOLITION	6	6 x 1 x .062	152 x 22 x 1.6	210886066GR*	21220B6066GR*	
	6	9 x 1 x .062	229 x 22 x 1.6	21090966GR	21222B966GR	
	6	12 x 1 x .062	305 x 22 x 1.6	21091106GR	21223B106GR	
	10	9 x 1 x .062	229 x 22 x 1.6	21089960GR	21221B960GR	
METAL	10	6 x 3/4 x .035	152 x 19 x .9	21064610GR	21078B610GR	
	10	8 x 3/4 x .050	203 x 19 x 1.3	21065810GR	21079B810GR	
	14	4 x 3/4 x .035	102 x 19 x .9	21066414GR*	21080B414GR*	
	14	6 x 3/4 x .035	152 x 19 x .9	21067614GR	21081B614GR	
	18	4 x 3/4 x .035	102 x 19 x .9	21068418GR*	—	
	18	6 x 3/4 x .035	152 x 19 x .9	21069618GR	21083B618GR	
	18	8 x 3/4 x .035	203 x 19 x .9	21070818GR	21084B818GR	
	24	4 x 3/4 x .035	102 x 19 x .9	21071424GR*	—	
	24	6 x 3/4 x .035	152 x 19 x .9	21072624GR	21086B624GR	
WOOD	24	8 x 3/4 x .035	203 x 19 x .9	21073824GR	21087B824GR	
	6	6 x 7/16 x .050	152 x 11 x 1.3	21063676GRC*	—	
	6	6 x 3/4 x .050	152 x 19 x 1.3	21060656GR	21074B656GR	
	6	9 x 3/4 x .050	229 x 19 x 1.3	21062956GR	21076B956GR	
	6	12 x 3/4 x .050	305 x 19 x 1.3	21061156GR	21075B156GR	

* Blades do not feature POWER ARC technology.



DEMOLITION CT™ RECIPROCATING SAW BLADES

**Carbide Tipped for Highest Performance
in Nail-Embedded Wood**

UP TO 5X LONGER LIFE THAN BI-METAL RECIPROCATING BLADES

High performance carbides are welded with the latest technology to increase durability and prevent tooth loss for longer blade life

Taller and thicker blade profile versus traditional blades, provides maximum durability in tough demolition applications

ENGINEERED FOR FASTER PERFORMANCE

Each tooth is precision ground on multiple surfaces to cut through nails with ease



up to **5x** LIFE

APPLICATION

TPI	LENGTH X WIDTH X THICKNESS		1-PACK	5-PACK	APPLICATION
	IN	MM	PROD NO	PROD NO	
6	6 x 1 x .050	152 x 22 x 1.3	1832118	1832162	
6	9 x 1 x .050	229 x 22 x 1.3	1832143	1832144	
6	12 x 1 x .050	305 x 22 x 1.3	1832146	1832147	

DEMOLITION RECIPROCATING SAW BLADES

Best Blade for Demolition Applications

POWER BLAST TECHNOLOGY™ INCREASES BLADE LIFE

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durability


MAXIMUM DURABILITY

Taller and thicker blade profile prevents bending during cutting and provides maximum control in the toughest demolition applications



LONG-LASTING
BiMetal
BLADE TECHNOLOGY

TPI	LENGTH X WIDTH X THICKNESS		2-PACK	5-PACK	10-PACK	25-PACK	50-PACK	APPLICATION
	IN	MM	PROD NO	PROD NO	PROD NO	PROD NO	PROD NO	
6	6 x 1 x .062	152 x 22 x 1.6	205126066R	203706066R5	1861832	20514B6066R	—	
6	9 x 1 x .062	229 x 22 x 1.6	20598966R	20371966R5	1861605	20523B966R	227630SB966R	
6	12 x 1 x .062	305 x 22 x 1.6	20500106R	20373106R5	1861939	20485B106R	—	
10	9 x 1 x .062	229 x 22 x 1.6	20597960R	20372960R5	1861833	20524B960R	227620SB960R	



LAZER® RECIPROCATING SAW BLADES

Best for Heavy Metal Cutting

POWER BLAST TECHNOLOGY™ INCREASES BLADE LIFE

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durability

STRAIGHTER CUTS IN LARGE DIAMETER MATERIALS

Taller blade profile delivers straighter cuts and longer life in the most demanding metal cutting applications



TPI	LENGTH X WIDTH X THICKNESS		2-PACK	5-PACK	10-PACK	25-PACK	50-PACK	APPLICATION
	IN	MM	PROD NO	PROD NO	PROD NO	PROD NO	PROD NO	
8	6 x 1 x .042	152 x 25 x 1.07	—	201926108R	—	—	—	Structural Steels greater than 3/16" 
8	9 x 1 x .042	229 x 25 x 1.07	—	201939108R	—	20195B9108R	—	
8	12 x 1 x .042	305 x 25 x 1.07	—	2019412108R	—	—	—	
10	6 x 1 x .042	152 x 25 x 1.07	24901T6110R	201706110R	—	20171B6110R	—	Structural Steels and All Metals 3/16"–1/2" 
10	9 x 1 x .042	229 x 25 x 1.07	24905T9110R	201769110R	1861951	20177B9110R	—	
10	12 x 1 x .042	305 x 25 x 1.07	—	2018212110R	—	20183B12110R	—	
14	6 x 1 x .035	152 x 25 x .9	24902T6114R	201726114R	—	20173B6114R	227640SB6114R	Structural Steels and All Metals 3/32"–3/8" 
14	9 x 1 x .035	229 x 25 x .9	24906T9114R	201789114R	1861952	20179B9114R	227660SB9114R	
14	12 x 1 x .042	305 x 25 x 1.07	24910T12114R	2018412114R	—	20185B12114R	—	
18	6 x 1 x .035	152 x 25 x .9	24903T6118R	201746118R	1861940	20175B6118R	227650SB6118R	Structural Steels and All Metals 1/16"–1/4" 
18	9 x 1 x .035	229 x 25 x .9	24907T9118R	201809118R	1861953	20181B9118R	227670SB9118R	
18	12 x 1 x .042	305 x 25 x 1.07	24911T12118R	2019012118R	—	20191B12118R	—	



BI-METAL RECIPROCATATING SAW BLADES

Built Stronger. Cuts Longer.

POWER BLAST TECHNOLOGY™ INCREASES BLADE LIFE

High speed blasting along the cutting edge strengthens the blade to reduce breaks and increase durability

LONGER BLADE LIFE & INCREASED VERSATILITY

Patented T2™ Technology reduces cutting forces on each tooth and optimizes chip removal to allow efficient cutting in the widest range of materials.



	TPI	LENGTH X WIDTH X THICKNESS		1-PACK	5-PACK	10-PACK	25-PACK	50-PACK	APPLICATION
		IN	MM	PROD NO	PROD NO	PROD NO	PROD NO	PROD NO	
WOOD CUTTING	4	6 x 3/4 x .050	152 x 19 x 1.3	20574S634R	20575634R	—	—	—	
	6	4 x 3/4 x .050	102 x 19 x 1.3	—	20449456RP	—	—	—	
	6	6 x 3/4 x .050	152 x 19 x 1.3	20571S636RP	20570636RP	—	20497B636RP	—	
	6	6 x 3/4 x .035	152 x 19 x .9	20559S606R	20560606R	—	20492B606R	—	
	6	6 x 7/16 x .050	152 x 11 x 1.3	20557S676RC	20556676RC	—	—	—	
	6	6 x 3/4 x .050	152 x 19 x 1.3	20573S656R	20572656R	1861220	20530B656R	227500SB656R	
	6	9 x 3/4 x .050	229 x 19 x 1.3	20587S956R	20582956R	1861354	20558B956R	227520SB956R	
	6	12 x 3/4 x .050	305 x 19 x 1.3	20586S156R	20585156R	1861769	20495B156R	227550SB156R	
GENERAL PURPOSE	10	6 x 3/4 x .035	152 x 19 x .9	20561S610R	20562610R	—	20493B610R	227610SB610R	
	10	8 x 3/4 x .050	203 x 19 x 1.3	20581S810R	20580810R	1861352	20590B810R	227530SB810R	
	10/14	6 x 3/4 x .050	152 x 19 x 1.3	20592650R*	20374650R5	—	20515B650R	—	
	10/14	8 x 3/4 x .050	203 x 19 x 1.3	—	20577850R	—	20535B850R	—	
	10/14	12 x 3/4 x .050	305 x 19 x 1.3	20584S110R	20583110R	—	20491B110R	227580SB110R	
	10/14	6 x 3/4 x .035	152 x 19 x .9	—	12129635R	—	—	—	
	10/14	8 x 3/4 x .035	203 x 19 x .9	—	12130835R	—	—	—	
THICK METAL	14	3-5/8 x 5/16 x .035	92 x 8 x .9	—	20520314RC	—	—	—	
	14	4 x 3/4 x .035	102 x 19 x .9	—	20550414R	—	20488B414R	227600SB414R	
	14	6 x 3/4 x .035	152 x 19 x .9	20565S614R	20564614R	1861216	20494B614R	227560SB614R	
	14	8 x 3/4 x .035	203 x 19 x .9	—	21519814R	—	1855567	1855570	
	14	9 x 3/4 x .050	225 x 19 x 1.3	205119514R*	—	—	—	—	
MEDIUM METAL	18	3-5/8 x 5/16 x .035	92 x 8 x .9	20522S318RC	20521318RC	—	—	—	
	18	4 x 3/4 x .035	102 x 19 x .9	20553S418R	20552418R	—	20489B418R	227590SB418R	
	18	6 x 3/4 x .035	152 x 19 x .9	20567S618R	20566618R	1861217	20529B618R	227510SB618R	
	18	8 x 3/4 x .035	203 x 19 x .9	20563S818R	20578818R	1861353	20487B818R	227540SB818R	
	18	12 x 3/4 x .035	305 x 29 x .9	—	21510118R	—	21511B118R	—	
THIN METAL	24	4 x 3/4 x .035	102 x 19 x .9	—	20554424R	—	20490B424R	—	
	24	6 x 3/4 x .035	152 x 19 x .9	20569S624R	20568624R	1861218	20496B624R	227570SB624R	
	24	8 x 3/4 x .035	203 x 19 x .9	—	20579824R	—	—	—	

* This item is a 2-pack

LENOX DIAMOND™ RECIPROCATING SAW BLADES

Cuts Cast. Fast.

LASTS LONGER

Nickel alloy-brazed diamond particles maintain sharpness to keep cutting after conventional carbide grit fails

CUTS 3X FASTER*

A narrow kerf design enables thinner, faster cuts

STRAIGHT, CLEAN CUTS

Unlike bulky snap cutters which crush pipes and leave ragged, uneven cuts, LENOX DIAMOND cuts clean. Durable chrome alloy backing steel provides extra stability

**Speed measured cutting 4" cast iron pipe at maximum speed vs. the leading competitor*

LENGTH X WIDTH X THICKNESS			1-PACK	APPLICATION
IN	MM	PROD NO	PROD NO	
8 x 3/4 x .040	203 x 19 x 1	10833800RDG		
9 x 3/4 x .042	225 x 19 x 1.07	1766338*		
11 x 3/4 x .042	275 x 19 x 1.07	1766356*		Cast Iron, Tile, Brick and Natural Stone

* Double Tang

CARBIDE GRIT RECIPROCATING SAW BLADES

For Cutting Non-Metallic Materials

HIGH PERFORMANCE IN ABRASIVE MATERIALS

Cuts through tough materials that resist chip-forming, including ceramics, pipe, man-made stone, brick, marble and more

SMOOTH, QUICK CUTS

Uniformly applied, durable carbide grit particles on a flexible blade provide fast cuts without snagging or binding

LENGTH X WIDTH X THICKNESS			2-PACK	APPLICATION
IN	MM	PROD NO	GRIT	
6 x 3/4 x .032	152 x 19 x .8	20505600RG	Medium	
8 x 3/4 x .040	203 x 19 x 1	20576800RG	Medium	
10 x 3/4 x .050	254 x 19 x 1.3	20506100RG	Medium	Fiberglass, Ceramic Tile, Cultured Marble, Clays, Brick

EXTRA SHARP FLEAM GROUND RECIPROCATING BLADES

Fast, Clean Cutting in Wood or Plastic

BI-METAL CONSTRUCTION

Durable and flexible to survive nail strikes

FLEAM GROUND TOOTH FORM

Fast, clean wood cutting

IDEAL FOR CLEAN WOOD, PLASTIC PIPE AND TREE PRUNING

LENGTH X WIDTH X THICKNESS				APPLICATION
TPI	IN	MM	5-PACK PROD NO	
6	6 x 3/4 x .050	152 x 19 x 1.3	121016W6R	
6	9 x 3/4 x .050	229 x 19 x 1.3	121029W6R	Clean Wood, Plastics, Pruning

LENOX®

RECIPROCATING SAW BLADE KITS



121439KPE
9 PIECE
GENERAL PURPOSE KIT
Includes Storage Case

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS	
			IN	MM
2	656R	6	6 x 3/4 x .050	152 x 19 x 1.3
2	624R	24	6 x 3/4 x .035	152 x 19 x .9
2	818R	18	8 x 3/4 x .035	203 x 19 x .9
2	810R	10	8 x 3/4 x .050	203 x 19 x 1.3
1	960R	10	9 x 7/8 x .062	229 x 22 x 1.6



1214412RKD
12 PIECE
DEMOLITION KIT
Includes Storage Case

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS	
			IN	MM
3	6066R	6	6 x 7/8 x .062	150 x 22 x 1.6
3	6114R	14	6 x 1 x .035	150 x 25 x .9
2	9114R	14	9 x 1 x .035	229 x 25 x .9
2	966R	6	9 x 7/8 x .062	229 x 22 x 1.6
2	960R	10	9 x 7/8 x .062	229 x 22 x 1.6



20502546A
5 PIECE
GENERAL PURPOSE KIT
4" and 6" Blade Assortment

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS	
			IN	MM
1	414R	14	4 x 3/4 x .035	102 x 19 x .9
1	418R	18	4 x 3/4 x .035	102 x 19 x .9
1	614R	14	6 x 3/4 x .035	152 x 19 x .9
1	618R	18	6 x 3/4 x .035	152 x 19 x .9
1	656R	6	6 x 3/4 x .050	152 x 19 x 1.3



1839466
5 PIECE
METAL CUTTING KIT

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS	
			IN	MM
3	618R	18	6 x 3/4 x .035	152 x 19 x .9
2	818R	18	8 x 3/4 x .035	203 x 19 x .9



1839467
5 PIECE
WOOD CUTTING KIT

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS	
			IN	MM
3	656R	6	6 x 3/4 x .050	152 x 19 x 1.3
2	956R	6	9 x 3/4 x .050	229 x 19 x 1.3



1839465
5 PIECE
DEMOLITION KIT

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS	
			IN	MM
1	6066R	6	6 x 1 x .062	150 x 25 x 1.6
1	6114R	14	6 x 1 x .035	150 x 25 x .9
1	9114R	14	9 x 1 x .035	229 x 25 x .9
1	966R	6	9 x 1 x .062	229 x 25 x 1.6
1	960R	10	9 x 1 x .062	229 x 25 x 1.6










1073415RKG
15 PIECE
GENERAL PURPOSE KIT
Includes Storage Case

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS	
			IN	MM
5	614R	14	6 x 3/4 x .035	152 x 19 x .9
5	618R	18	6 x 3/4 x .035	152 x 19 x .9
5	656R	6	6 x 3/4 x .050	152 x 19 x 1.3

RECIPROCATING SAW BLADE SELECTION GUIDE



	WOOD	NAIL-EMBEDDED WOOD	NON-FERROUS METAL	DEMOLITION	FIRE & RESCUE	PLASTICS & COMPOSITES	THICK METAL	MEDIUM METAL	THIN METAL	DRYWALL/ PLASTER	TILE & GRANITE	CAST IRON	ABRASIVES
													
BEST	DEMOLITION CT™		LENOX Gold® POWER ARC™ CURVED BLADES							BI-METAL	LENOX DIAMOND™		
BETTER	LENOX Gold® POWER ARC™ CURVED BLADES		LAZER®	BI-METAL			LAZER®			—	CARBIDE GRIT	CARBIDE GRIT	
GOOD	BI-METAL			—			BI-METAL			—	—	—	


TEETH PER INCH SELECTION GUIDE

								
ROUGH ←				CUT QUALITY				→ SMOOTH
FAST ←				CUT SPEED				→ SLOW
WOOD								
		THICK METAL 1/8"–1/2" (3.2–12.7mm)						
					MEDIUM METAL 3/32"–5/16" (2.4–7.9mm)			
							THIN METAL <1/8" (<3.2mm)	
								ABRASIVES

BLADE LENGTH SELECTION GUIDE






TIP Always keep 2-3 teeth in the material at all times



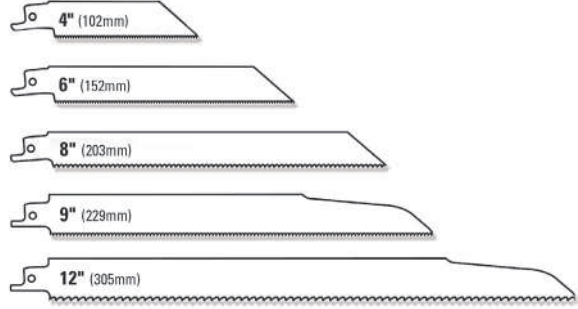







WIDTH OF MATERIAL + 3" (76mm) = BLADE LENGTH
EXAMPLE: 5" (WIDTH) + 3" (76mm) = 8" (203mm).
USE AN 8" (203mm) OR 9" (229mm) BLADE



	TPI	LENGTH		DESC	SHAPE	MILWAUKEE®	DIABLO®	MK MORSE®
		IN	MM					
LENOX Gold® POWER ARC™	6	6	152	676GRC*		—	—	—
	6	6	152	656GR		—	—	—
	6	6	152	6066GR*		—	—	—
	6	9	229	956GR		—	—	—
	6	9	229	966GR		—	—	—
	6	12	305	156GR		—	—	—
	6	12	305	106GR		—	—	—
	8	6	152	6108GR		—	—	—
	8	9	229	9108GR		—	—	—
	10	6	152	610GR		—	—	—
	10	6	152	6110GR		—	—	—
	10	8	203	810GR		—	—	—
	10	9	229	9110GR		—	—	—
	10	9	229	960GR		—	—	—
	10	12	305	12110GR		—	—	—
	14	4	102	414GR*		—	—	—
	14	6	152	614GR		—	—	—
	14	6	152	6114GR		—	—	—
	14	9	229	9114GR		—	—	—
	14	12	305	12114GR		—	—	—
	18	4	102	418GR*		—	—	—
	18	6	152	618GR		—	—	—
	18	6	152	6118GR		—	—	—
	18	8	203	818GR		—	—	—
	18	9	229	9118GR		—	—	—
	18	12	305	12118GR		—	—	—
	24	4	102	424GR*		—	—	—
	24	6	152	624GR		—	—	—
	24	8	203	824GR		—	—	—
DEMOLITION CT™	6	6	152	656RCT		—	DS0606CWS	—
	6	9	229	956RCT		—	DS0906CWS	—
	6	12	305	156RCT		—	DS1206CWS	—
DEMOLITION	6	6	152	6066R		5021, 8021	DS0614BGP5	—
	6	9	229	966R		5026	—	—
	6	12	305	106R		5027	—	—
	10	9	229	960R		—	—	RBR962811T03, RB96210T03
LAZER®	8	6	152	6108R		2701, 5701, 8701	—	RBAE6811T05, RBAE650811T05
	8	9	229	9108R		5706, 8706	—	RBAE9811T05, RBAE950811T05
	8	12	305	12108R		5711	—	RBAE12811T05, RBAE1250811T05
	10	6	152	6110R		4172, 5712	DS0608BFD5, DS0608CF3	—
	10	9	229	9110R		4713, 5713	DS0908BFD2, DS0908BFD5, DS0908BFD25	RB1010T05
	10	12	305	12110R		5714	—	RBSA121014T05, RB1210T05

* Blades do not feature POWER ARC technology.

RECIPROCATING SAW BLADES CROSS REFERENCE CHART

	TPI	LENGTH		DESC	SHAPE	MILWAUKEE®	DIABLO®	MK MORSE®
		IN	MM					
LAZER	14	6	152	6114R		4782	DS0414BF5, DS0614BF2, DS0614BF5, DS0614BF25	RBPB65014T05, RBAE61115T05, RBAE6501115T05
	14	9	229	9114R		4787, 5787	DS0914BF5	RBPB125014T05, RBAE91115T05, RBAE9501115T05
	14	12	305	12114R		5794	DS1214BF5	RBAE121115T05, RBAE12501115T05, RBPB125014T05
	18	6	152	6118R		4784, 5784	—	RB65018T05, RBAE61521T05, RBAE6501521T05
	18	9	229	9118R		4788, 5790, 5788	—	RBSA818T05, RBAE91521T05, RBAE9501521T05
	18	12	305	12118R		4789, 5791, 8789, 5789	—	RBSA1218T05, RBAE121521T05, RBAE12501521T05
STANDARD BI-METAL	4	6	152	634R		—	—	—
	6	4	102	456RP		5052	—	—
	6	6	152	636RP		—	—	RB65006PT05
	6	6	152	656R		5035	DS0612BW2, DS0612BW5, DS0612BW25	RB63506T05, RB65006T05, RB65058T05
	6	6	152	676RC		1606, 5041	—	RB65006CT05, RB65006CT50
	6	6	152	606R		5015	—	—
	6	9	229	956R		5016, 5036	DS0912BW2, DS0912BW5, DS0912BW25	RB95006C2, RB93506T05, RB95006T05
	6	12	305	156R		5017, 5037	DS1212BW2, DS1212BW5, DS1212BW25	RB123506T05, RB125006T05
	10	6	152	610R		5090, 5091, 4091, 5092	—	RBWP64210T05, RB610T05
	10	8	203	810R		4093, 5093	DS0914BGP2, DS0914BGP5, DS0914BGP25	RBWP94210T05, RB810T05
	10/14	6	152	635R		—	—	—
	10/14	6	152	650R		—	—	RB41014T05, RB61014T05, RB6501014T05, RB6501014TT05
	10/14	8	203	835R		5193	—	—
	10/14	8	203	850R		5193	DS0914AFC2, DS0914AFC5	RB81014C2, RB850812T05, RB81014T05, RB8501014T05, RB125010T05, RB12551014T05, RB121014T05, RB12501014STT05
	10/14	12	305	110R		5094, 5194	DS1214AFC5	—
	14	3-5/8	92	314RC		5161, 5162	—	—
	14	4	102	414R		5181	—	RB414T05
	14	6	152	614R		5182, 4182,	—	RB65014T05, RB64214T05, RBWP64214T05, RB614T05
	14	8	203	814R		5187, 4182, 7187	—	RB814, RBMC814
	14	9	225	9514R		—	—	RBWP94214T05
	18	3-5/8	92	318RC		5163	—	RB318ST05, RB318ST50
	18	4	102	418R		5183	—	—
	18	6	152	618R		4184, 5184	—	RB64218T05, RB618T05, RBWP64218T05
	18	8	203	818R		4188, 5188	—	RB94218T05, RB918T05, RB818T05
	18	12	305	118R		5189	—	RB124218T05, RB1018T05, RB1218T05
	24	4	102	424R		5185	—	RB424T05
	24	6	152	624R		4186, 5186, 8186	—	RB64224T05, RB624T05
	24	8	203	824R		—	DS0920BF2, DS0920BF5, DS0920BF25	—
LENOX DIAMOND™	Grit	8	203	800DRDG		1440	DS0930CGX	RBDG6C
	Grit	9	225	800DTDG		1450	DS0930DGX	RBDG9C
	Grit	11	275	100DTDG		—	—	—
CARBIDE GRIT	Grit	6	152	600RG		1421, 6430, 1420	—	RTC66
	Grit	8	203	800RG		1431, 6430, 1430	—	RTC68
	Grit	10	254	100RG		—	—	—
FLEAM GROUND	6	6	152	6W6R		1301, 1303, 1304, 1305, 7015, 7016	—	—
	6	9	229	9W6R		—	DS0905FG, DS0905FG5, DS1205FG, DS1205FG5	—



MASTER-BAND™ BLADES

Maximum Performance for Portable Band Saws

ENHANCED BEAM STRENGTH

Specially treated bands of .023 and .025 thicknesses offer increased blade strength, reducing deflection and twisting of blades during severe cutting conditions

SHATTER RESISTANT

Bi-metal blades bend and resist breaking and extend blade life

LONG LASTING

LENOX TUFF TOOTH design reinforces tooth for longer blade life



TPI	LENGTH X WIDTH X THICKNESS		EDGE MATERIAL	3-PACK PROD NO	25-PACK PROD NO	APPLICATION
	IN	MM				
10/14	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011438EW1014	9403B38EW1014	1/4" & larger, most metals
14	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011538EW14	9404B38EW14	3/16"– 3/8", most metals
14/18	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011238EW1418	9407B38EW1418	1/8"– 5/16", most metals
18	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011638EW18	9405B38EW18	3/32"– 1/4", most metals
24	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011738EW24	9406B38EW24	up to 1/8", most metals
8/12	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	80143385EW812	9398B385EW812	3/8"– 1/2", metals, including stainless steel
10/14	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	80144385EW1014	9399B385EW1014	1/4" & larger, metals, including stainless steel
14	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	80145385EW14	9400B385EW14	3/16"– 3/8", metals, including stainless steel
14/18	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	80142385EW1418	9401B385EW1418	1/8"– 5/16", metals, including stainless steel
18	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	82310385EW18	9402B385EW18	3/32"– 1/4", metals, including stainless steel

WOLF-BAND® BLADES

Professional Performance and Exceptional Value

LONG LASTING

High speed steel teeth provide a strong, long lasting cutting edge


SHATTER RESISTANT

Bi-metal blades bend and resist breaking and extend blade life

EXCEPTIONAL VALUE


Professional performance and competitive pricing provide extraordinary cost-per-cut value

TPI	LENGTH X WIDTH X THICKNESS		1-PACK PROD NO	5-PACK PROD NO	25-PACK PROD NO	APPLICATION
	IN	MM				
10/14	44-7/8 x 1/2 x .020	1140 x 12.7 x .5	3842838PW10141	8009838PW10145	3842338PW1014	1/4" & larger
14	44-7/8 x 1/2 x .020	1140 x 12.7 x .5	3842938PW141	8010738PW145	3842438PW14	3/16"– 3/8"
14/18	44-7/8 x 1/2 x .020	1140 x 12.7 x .5	3843038PW14181	8009938PW14185	3842738PW1418	1/8"– 5/16"
18	44-7/8 x 1/2 x .020	1140 x 12.7 x .5	3843138PW181	8010838PW185	3842538PW18	3/32"– 1/4"
24	44-7/8 x 1/2 x .020	1140 x 12.7 x .5	3843238PW241	8010938PW245	3842638PW24	up to 1/8"
COMPACT PORTABLE BAND SAW BLADES						
10/14	35-3/8 x 1/2 x .020	900 x 13 x .50	1786692	1786673	1786678	1/4" (6mm) & larger
14	35-3/8 x 1/2 x .020	900 x 13 x .50	1786693	1786674	1786679	3/16" (5mm)– 3/8" (10mm)
18	35-3/8 x 1/2 x .020	900 x 13 x .50	1786695	1786675	1786680	3/32" (2mm)– 1/4" (6mm)
24	35-3/8 x 1/2 x .020	900 x 13 x .50	1786660	1786676	1786761	up to 1/8" (3,2mm)



JIG SAW BLADES

Bi-metal	66
High Carbon Steel & LENOX <i>DIAMOND™</i> Grit	67
Carbide Grit, Jig Saw Blade Sets & Air Saw Blades..	68
Metal Cutting Circular Saw Blades	69





BI-METAL JIG SAW BLADES

Ideal for Woodworking and Metal Cutting

PRECISION CUTTING

Super sharp to cut fast without deflection

SMOOTH FINISH

Ground to precision sharpness for straight cuts and a smooth finish


IDEAL FOR WOODWORKING



Designed for optimal performance in wood cutting, including hardwoods

SHATTER RESISTANT

Bi-metal technology flexes and resists breaking and extends blade life



	TPI	LENGTH		 T-SHANK	PROCESS	2-PACK	5-PACK	25-PACK	APPLICATION	COMPETITIVE CROSS REFERENCE BOSCH®
		IN	MM			PROD NO	PROD NO	PROD NO		
WOOD CUTTING	6	4	102		Milled	20305BT406S	—	20812B406S	Fast, rough cut	T144DF
	6	4	102		Ground	20315BT456S	20850F456S	20781B456S	Very fast, clean cut	
	6	6	102		Milled	20309BT686S			Fast cut	
	10	4	102		Milled	20306BT410S	20851F410S	20813B410S	Fast, nail-embedded wood	T127DF
	10	4	102		Ground	20313BT450S	20842F450S	20814B450S	Clean, smooth cut	T101BF
	10D	4	102		Ground	20314BT450SR	20843F450SR	20782B450SR	Down cut	T101BRF
	20	3-1/4	82.5		Ground	20311BT320SC	—	—	Scroll cut, laminates	T101AOF
METAL CUTTING	14	3-5/8	92.1		Milled	20301BT314S	20832F314S	20815B314S	Thick metal	T188BF/T118B
	18	3-5/8	92.1		Milled	20302BT318S	20834F318S	20816B318S	Medium metal	T118EF
	18	5-1/4	133.4		Milled	20308BT518S	20854F518S	—	Medium metal	T318B
	24	3-5/8	92.1		Milled	20303BT324S	20835F324S	20817B324S	Thin metal	T118A/T118AF
	32	3-5/8	92.1		Milled	20803BT332S	—	—	Very thin metal	T118G

	TPI	LENGTH		 U-SHANK	PROCESS	2-PACK	5-PACK	25-PACK	APPLICATION	COMPETITIVE CROSS REFERENCE BOSCH®
		IN	MM			PROD NO	PROD NO	PROD NO		
WOOD CUTTING	6	4	102		Milled	20329BT486J	20652F486J	—	Fast, rough cut	U111DF
	6	4	102		Ground	20337BT456J	—	20784B456J	Very fast, clean cut	U101DF
	6	6	102		Milled	20331BT686J	—	—	Fast cut	—
	10	4	102		Milled	20328BT480J	20654F480J	—	Fast, nail-embedded wood	—
	10	4	102		Ground	20335BT450J	20648F450J	20702B450J	Clean, smooth cut	U101BF
	10D	4	102		Ground	20336BT450JR	—	20791B450JR	Down cut	—
	20	2-3/4	69.9		Ground	20333BT320JC	—	—	Scroll cut, laminates	U1A0F
METAL CUTTING	14	3-5/8	92.1		Milled	20321BT314J	20641F314J	20705B314J	Thick metal	U118B/U118BF
	18	3-5/8	92.1		Milled	20322BT318J	20643F318J	20706B318J	Medium metal	U118E/U118EF
	18	5-1/4	133.4		Milled	20330BT518J	—	—	Medium metal	—
	24	3-5/8	92.1		Milled	20323BT324J	20644F324J	20707B324J	Thin metal	U118A/U118AF
	32	3-5/8	92.1		Milled	20609BT332J	—	—	Very thin metal	U118G/U118GF

BOSCH is a registered trademark of Robert Bosch Tool Corporation

HIGH CARBON STEEL JIG SAW BLADES

Ideal for Woodworking

PRECISION CUTTING


Super sharp to cut fast without deflection

SMOOTH FINISH

Ground to precision sharpness for straight cuts and a smooth finish

IDEAL FOR WOODWORKING

Designed for optimal performance in wood cutting, including hardwoods

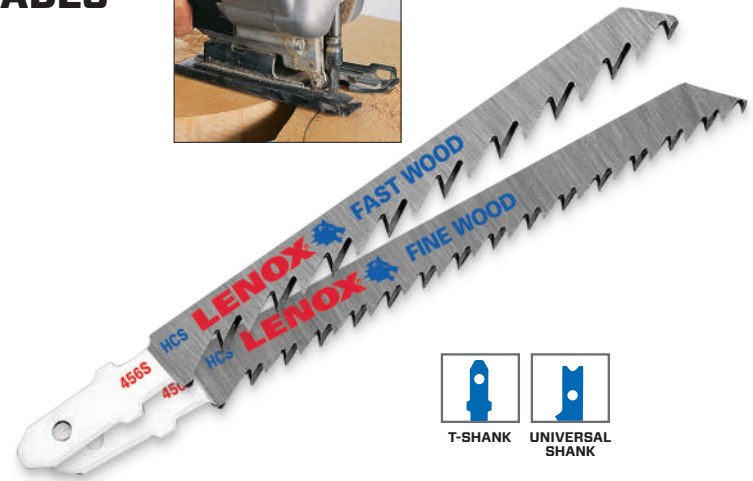

T-SHANK

UNIVERSAL SHANK

TPI	LENGTH		 T-SHANK	PROCESS	2-PACK	5-PACK	25-PACK	APPLICATION	COMPETITIVE CROSS REFERENCE
	IN	MM			PROD NO	PROD NO	PROD NO		BOSCH®
6	4	102		Milled	20750CTS406S	20298CFS406S	—	Fast, rough cut	T111C
6	4	102		Ground	20751CT456S	20297CF456S	20292BC456S	Very fast, clean	T101D
6	3-5/8	92.1		Ground	20312CT416SC	—	—	Scroll cut	T244D
10	4	102		Ground	20752CT450S	20296CF450S	20291BC450S	Clean, smooth cut	T101B
10D	4	102		Ground	20753CT450SR	20295CF450SR	20290BC450SR	Down cut	T101BR
20	3-1/4	82.5		Ground	20754CT320SC	20299CF320SC	20294BC320SC	Scroll cut, laminates	T101A0

TPI	LENGTH		 U-SHANK	PROCESS	2-PACK	5-PACK	25-PACK	APPLICATION	COMPETITIVE CROSS REFERENCE
	IN	MM			PROD NO	PROD NO	PROD NO		BOSCH®
6	4	102		Milled	20755CTS406J	—	—	Fast, rough cut	U111D
6	4	102		Ground	20756CT456J	—	20794BC456J	Very fast, clean cut	U101D
6	3-5/8	92.1		Ground	20334CT416JC	—	—	Scroll cut	U244D
10	4	102		Ground	20757CT450J	—	20795BC450J	Clean, smooth cut	U101B
10D	4	102		Ground	20758CT450JR	—	—	Down cut	U101BR
20	2-3/4	69.9		Ground	20759CT320JC	—	20797BC320JC	Scroll cut, laminates	U101A0

LENOX DIAMOND™ GRIT JIG SAW BLADE



TPI	LENGTH		T-SHANK	PROCESS	1-PACK	APPLICATION
	IN	MM			PROD NO	
Grit	3-1/2	88.9		Grit	12149	Ceramic Tile, Fiberglass



CARBIDE GRIT JIG SAW BLADES



TPI	LENGTH		SHAPE	PROCESS	2-PACK	5-PACK	APPLICATION	COMPETITIVE CROSS REFERENCE
	IN	MM	T-SHANK		PROD NO	PROD NO		BOSCH®
Grit	3-1/2	88.9		Grit	20300GT300S	20830F300SG	Ceramic Tile	T130RF3
U-SHANK								
Grit	3-1/2	88.9		Grit	20320GT300J	—	Ceramic Tile	—

BOSCH is a registered trademark of Robert Bosch Tool Corporation

JIG SAW BLADE SETS

Bi-Metal Sets



20868U743SA
7 PIECE T-SHANK
BI-METAL SET

456S, 450SR, 450S,
406S, 324S, 318S, 314S
VINYL POUCH



20606U743JA
7 PIECE U-SHANK
BI-METAL SET

456J, 450JR, 450J,
406J, 324J, 318J, 314J
VINYL POUCH

High Carbon Steel Sets



20764C543SA
5 PIECE T-SHANK
MULTI-PURPOSE SET

456S, 450S, 324S,
320SC, 318S
BLISTER PACK



20769C543JA
5 PIECE U-SHANK
MULTI-PURPOSE SET

456J, 450J, 324J,
320JC, 318J
BLISTER PACK

AIR SAW BLADES

Maximum Durability for Pneumatic Machine Cutting

SHATTER RESISTANT

Bi-metal blades bend and resist breaking and extend blade life

LONG LASTING

High speed steel teeth provide a strong, long lasting cutting edge



TPI	LENGTH X WIDTH X THICKNESS		5-PACK	25-PACK	APPLICATION
	IN	MM	PROD NO	PROD NO	
18	4 x 1/2 x .025	102 x 12.7 x .6	20426418T	20423B418T	For pneumatic machine cutting applications in automotive repair & sheet metal
24	4 x 1/2 x .025	102 x 12.7 x .6	20427424T	20424B424T	
32	4 x 1/2 x .025	102 x 12.7 x .6	20428432T	20425B432T	

METAL CUTTING CIRCULAR SAW BLADES

A Faster Way to Cut Metal™

EXTENDED LIFE

Titanium carbide tipped
Resists material build-up on teeth

CLEAN, COOL CUTS

Less burr than abrasive blades
No need for secondary grinding
Reduced material burning


MODIFIED TRIPLE CHIP GRIND


For added durability

RESHARPENABLE



	DIAMETER		PROD NO	TOOTH COUNT	RPM	ARBOR		APPLICATION
	IN	MM				IN	MM	
STEEL	5-3/8	135	21876	30	3500	—	20	Structurals Thick walled pipe Threaded rod Channel steel Plate Solid steel
	6-3/4	171	21878	40	5800	—	20	
	7	180	21879	38	4300	—	20	
	7-1/4	184	21881	40	5800	5/8	16	
	8	203	21884	50	5800	5/8	16	
	9	230	21885	48	5200	1	25.4	
	10	254	21886	52	5200	5/8	16	
	12	305	21888	60	1500	1	25.4	
	14	355	21891	80	1800	1	25.4	
THIN STEEL	6-1/2	165	21877	48	5800	5/8	16	Sheet metal Thin walled pipe Metal roofing Metal decking
	7	180	21880	68	4300	—	20	
	7-1/4	184	21883	68	5800	5/8	16	
	12	305	21890	80	1500	1	25.4	
	14	355	21893	90	1800	1	25.4	
ALUMINUM	7-1/4	184	21882	60	5800	5/8	16	Aluminum Copper Brass
	10	254	21887	80	5200	5/8	16	
	12	305	21889	80	4000	1	25.4	
	14	355	21892	80	3000	1	25.4	





HOLE SAWS



T3 HOLE SAWS

<i>Hole Saw Selection Guide</i>	72
<i>SPEED SLOT® With T3 Technology™</i>	73
<i>Bi-metal SPEED SLOT® With T3 Technology™</i>	74
<i>Recommended Bi-Metal RPM</i>	75
<i>BI-METAL SPEED SLOT® With T3 Technology™ Kits</i>	76-77
<i>SNAP-BACK™ Arbors&Quick Change Extensions</i>	78
<i>Standard Arbors & Accessories</i>	79
<i>LENOX® DIAMOND™</i>	80-81
<i>Arbor With Retractable Pilot Drill</i>	82
<i>Carbide Grit</i>	83
<i>Carbide Tipped</i>	84-85
<i>Carbide Hole Cutters&Carbide Grit Recessed Lighting</i>	86
<i>ONE TOOTH® Rough Wood Hole Cutter</i>	87
<i>Recommended Carbide RPM</i>	88



HOLE SAW SELECTION GUIDE

	WOOD	NAIL-EMBEDDED WOOD	NON-FERROUS METAL	PLASTICS & COMPOSITES	METAL	STAINLESS STEEL	DRYWALL / PLASTER	CAST IRON	CEMENT BOARD	ABRASIVES	TILE & GRANITE
											
BEST	CARBIDE TIPPED			CARBIDE GRIT	CARBIDE TIPPED			LENOX® <i>DIAMOND™</i>			
BETTER	BI-METAL							CARBIDE TIPPED	CARBIDE GRIT		
GOOD	CARBIDE GRIT	—	CARBIDE GRIT	CARBIDE TIPPED	CARBIDE GRIT				BI-METAL	—	CARBIDE TIPPED

NEW

SPEED SLOT® HOLE SAWS WITH T3 TECHNOLOGY™

50% Longer Life. 2X More Durable.*

IMPROVED METAL CUTTING PERFORMANCE

Increased wall thickness improves durability and minimizes tooth loss
Optimized tooth design penetrates metal with ease

FAST, EFFICIENT CUTTING IN WOOD

Larger, sharper teeth remove more wood for fast cutting

EASY PLUG REMOVAL

SPEED SLOT staircase design for fast, easy plug ejection

*vs. Prior LENOX Generation



SPEED SLOT® staircase for fast, easy plug removal

Advanced tooth design increases cutting life



10% Thicker Wall adds strength and durability





BI-METAL SPEED SLOT® HOLE SAW WITH T3 TECHNOLOGY™



DIAMETER		1 PER BOX	1 PER BLISTER SEAL	1 PACK ARBORED	PIPE TAP		PIPE ENTRANCE		USE ARBOR	
IN	MM	PROD NO	PROD NO	PROD NO	IN	MM	IN	MM	SNAP-BACK™	STANDARD
9/16	14.3	300099L	1787781	1772423	—	—	—	—	5L	1L, 4L or 5L
5/8	15.9	3001010L	1771823	1772424	—	—	—	—	5L	1L, 4L or 5L
11/16	17.5	3001111L	1787773	1772425	—	—	—	—	5L	1L, 4L or 5L
3/4	19.1	3001212L	1771952	1772426	1/2	12.7	3/8	9.5	5L	1L, 4L or 5L
25/32	19.8	3009820MMHS	1771962	1772427	—	—	—	—	5L	1L, 4L or 5L
13/16	20.6	3001313L	1787775	1772428	—	—	—	—	5L	1L, 4L or 5L
7/8	22.2	3001414L	1771953	1772429	3/4	19.1	1/2	12.7	5L	1L, 4L or 5L
15/16	23.8	3001515L	1787776	1772430	—	—	—	—	5L	1L, 4L or 5L
1	25.4	3001616L	1771954	1772481	—	—	—	—	5L	1L, 4L or 5L
1-1/16	27.0	3001717L	1771955	1772482	—	—	—	—	5L	1L, 4L or 5L
1-1/8	28.6	3001818L	1771959	1772483	1	25.4	3/4	19.1	5L	1L, 4L or 5L
1-3/16	30.2	3001919L	1787777	1772474	—	—	—	—	5L	1L, 4L or 5L
1-1/4	31.8	3002020L	1771960	1772491	—	—	—	—	2L, 6L	2L, 3L or 6L
1-5/16	33.3	3002121L	1787778	1772492	—	—	—	—	2L, 6L	2L, 3L or 6L
1-3/8	34.9	3002222L	1771961	1772727	—	—	1	25.4	2L, 6L	2L, 3L or 6L
1-7/16	36.5	3002323L	1787779	1772728	—	—	—	—	2L, 6L	2L, 3L or 6L
1-1/2	38.1	3002424L	1771963	1772729	1-1/4	31.8	—	—	2L, 6L	2L, 3L, 6L or 7L
1-9/16	39.7	3002525L	1787780	1772730	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
1-5/8	41.3	3002626L	1771964	1772931	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
1-11/16	42.9	3002727L	1787800	1772932	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
1-3/4	44.5	3002828L	1771967	1772933	1-1/2	38.1	1-1/4	31.8	2L, 6L	2L, 3L, 6L or 7L
1-13/16	46.0	3002929L	1787841	1772935	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
1-7/8	47.6	3003030L	1771968	1772778	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
2	50.8	3003232L	1771970	1772779	—	—	1-1/2	38.1	2L, 6L	2L, 3L, 6L or 7L
2-1/16	52.4	3003333L	1787842	1772780	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
2-1/8	54.0	3003434L	1772003	1772951	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
2-1/4	57.2	3003636L	1771983	1772952	2	50.8	—	—	2L, 6L	2L, 3L, 6L or 7L
2-3/8	60.3	3003838L	1771984	1772953	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
2-1/2	63.5	3004040L	1771987	1772954	—	—	2	50.8	2L, 6L	2L, 3L, 6L or 7L
2-9/16	65.1	3004141L	1787843	1772955	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
2-5/8	66.7	3004242L	1771988	1772956	2-1/2	63.5	—	—	2L, 6L	2L, 3L, 6L or 7L
2-11/16	68.3	3004343L	1771989	—	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
2-3/4	69.9	3004444L	1771990	1772961	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
2-7/8	73.0	3004646L	1787844	1772962	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
3	76.2	3004848L	1772021	1772963	—	—	2-1/2	63.5	2L, 6L	2L, 3L, 6L or 7L
3-1/8	79.4	3005050L	1772022	1772964	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
3-1/4	82.6	3005252L	1772023	1772966	3	76.2	—	—	2L, 6L	2L, 3L, 6L or 7L
3-3/8	85.7	3005454L	1787845	1772945	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
3-1/2	88.9	3005656L	1772012	1772946	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
3-5/8	92.1	3005858L	1772013	1772949	—	—	3	76.2	2L, 6L	2L, 3L, 6L or 7L
3-3/4	95.3	3006060L	1787846	1772950	3-1/2	85.7	—	—	2L, 6L	2L, 3L, 6L or 7L
3-7/8	98.4	3006262L	1787847	1773001	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
4	101.6	3006464L	1772014	1773002	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
4-1/8	104.8	3006666L	1772018	1773003	—	—	3-1/2	85.7	2L, 6L	2L, 3L, 6L or 7L
4-1/4	108.0	3006868L	1772019	1773004	4	95.3	—	—	2L, 6L	2L, 3L, 6L or 7L
4-3/8	111.1	3007070L	1787848	1773005	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
4-1/2	114.3	3007272L	1772075	1773006	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
4-5/8	117.5	3007474L	1787850	—	—	—	4	95.3	2L, 6L	2L, 3L, 6L or 7L
4-3/4	120.7	3007676L	1772076	1773008	4-1/2	108.0	—	—	2L, 6L	2L, 3L, 6L or 7L
5	127.0	3008080L	1772077	—	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
5-1/2	139.7	3008888L	1787785	—	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L
6	152.4	3009696L	1772121	—	—	—	—	—	2L, 6L	2L, 3L, 6L or 7L

RECOMMENDED HOLE SAW RPM

BI-METAL

DIAMETER		MILD STEEL	TOOL / STAINLESS STEEL	CAST IRON	BRASS	ALUM
IN	MM					
9/16	14.3	580	300	400	790	900
5/8	15.9	550	275	365	730	825
11/16	17.5	500	250	330	665	750
3/4	19.1	460	230	300	600	690
25/32	19.8	425	210	280	560	630
13/16	20.6	425	210	280	560	630
7/8	22.2	390	195	260	520	585
15/16	23.8	370	185	245	495	555
1	25.4	350	175	235	470	525
1-1/16	27.0	325	160	215	435	480
1-1/8	28.6	300	150	200	400	450
1-3/16	30.2	285	145	190	380	425
1-1/4	31.8	275	140	180	360	410
1-5/16	33.3	260	135	175	345	390
1-3/8	34.9	250	125	165	330	375
1-7/16	36.5	240	120	160	315	360
1-1/2	38.1	230	115	150	300	345
1-9/16	39.7	220	110	145	290	330
1-5/8	41.3	210	105	140	280	315
1-11/16	42.9	205	100	135	270	305
1-3/4	44.5	195	95	130	250	295
1-13/16	46.0	190	95	125	250	285
1-7/8	47.6	180	90	120	240	270
2	50.8	170	85	115	230	255
2-1/16	52.4	165	80	110	220	245
2-1/8	54.0	160	80	105	210	240
2-1/4	57.2	150	75	100	200	225
2-3/8	60.3	140	70	95	190	220
2-1/2	63.5	135	65	90	180	205
2-9/16	65.1	130	65	85	175	200
2-5/8	66.7	130	65	85	170	195
2-11/16	68.3	125	60	80	160	185
2-3/4	69.9	125	60	80	160	185
2-7/8	73.0	120	60	80	160	180
3	76.2	115	55	75	150	170
3-1/8	79.4	110	55	70	140	165
3-1/4	82.6	105	50	70	140	155
3-3/8	85.7	100	50	65	130	150
3-1/2	88.9	95	45	65	130	145
3-5/8	92.1	95	45	60	120	140
3-3/4	95.3	90	45	60	120	135
3-7/8	98.4	85	40	55	110	130
4	101.6	85	40	55	110	130
4-1/8	104.8	80	40	55	110	120
4-1/4	108.0	80	40	55	110	120
4-3/8	111.1	75	35	50	100	105
4-1/2	114.3	75	35	50	100	105
4-5/8	117.5	75	35	50	100	105
4-3/4	120.7	70	35	45	90	95
5	127.0	70	35	45	90	95
5-1/2	139.7	65	30	40	85	90
6	152.4	65	30	40	85	90





BI-METAL SPEED SLOT® HOLE SAW WITH T3 TECHNOLOGY™ KITS

Convenient Storage for Trade-Specific Uses

DURABLE

Durable construction resists damage caused by drops and tough workplace environments

SECURE

Latches close case tightly and securely

LONG LASTING

Metal latches and metal pin hinges won't break or tear



CONTRACTOR'S HOLE SAW 5 PACKS

VALUE & CONVENIENCE

Unique packaging provides value and convenience for high volume users



PROD NO	IN	MM	PROD NO	IN	MM
10735B14L	7/8	22.2	10739B22L	1-3/8	34.9
10736B16L	1	25.4	10740B24L	1-1/2	38.1
10737B18L	1-1/8	28.6	10741B28L	1-3/4	44.5
10738B20L	1-1/4	31.8	10742B32L	2	50.8

ARBORED KITS



34082600AP 6 PIECE KIT PLUMBER'S KIT

3/4", 7/8", 1-1/8",
1-1/2", 1-3/4", 2-1/4"

LARGE KIT



34081600AE 6 PIECE KIT ELECTRICIAN'S KIT

7/8", 1-8", 1-3/8",
1-3/4", 2", 2-1/2"

LARGE KIT

CONTRACTOR'S KITS



30370400G 5 PIECE KIT

2", 3", 3-3/8",
4-1/8"
Standard
Arbor: 2L

LARGE KIT



308042000G 26 PIECE KIT-BIG DADDY™

3/4", 7/8", 1", 1-1/8", 1-3/8", 1-1/2",
1-3/4", 2", 2-1/8", 2-1/4", 2-1/2",
2-11/16", 3", 3-1/4", 3-3/8", 3-5/8",
3-3/4", 4-1/8", 4-1/2", 4-3/4"
Standard Arbors: 1L, 2L, 5L

Three pilot drills

LARGE KIT



30807700G 9 PIECE KIT

7/8", 1", 1-1/4",
1-3/8", 1-1/2",
1-3/4", 2-1/8"
Standard
Arbors: 5L, 6L

MEDIUM KIT



30374500G 9 PIECE KIT

2-1/8", 2-9/16",
3-1/4",
3-3/4", 4-3/4"
Standard
Arbor: 2L

Three pilot drills

LARGE KIT



308201200G 17 PIECE KIT

5/8", 3/4", 7/8", 1", 1-1/8",
1-1/4", 1-3/8", 1-1/2",
1-3/4", 2", 2-1/2", 3"
Standard Arbors: 1L, 2L

Three pilot drills

LARGE KIT



1815140 7 PIECE KIT

7/8", 1", 1-1/8",
1-1/2", 2-1/8"
Standard Arbors:
2L, 5L

MINI KIT

ELECTRICIAN'S KITS



30856C600L
9 PIECE KIT
7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Standard Arbors: 2L, 5L
One Arbor adaptor
MEDIUM KIT



30800600L
10 PIECE KIT
7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Standard Arbors: 2L, 5L
One pilot drill
One Arbor adaptor
LARGE KIT



308021200L
17 PIECE KIT
3/4", 7/8", 1-1/8", 1-3/8", 1-3/4", 2",
2-1/2", 2-11/16", 3", 3-5/8", 4-1/8", 4-3/4"
Standard Arbors: 2L, 5L
Three pilot drills
LARGE KIT



1815139
8 PIECE KIT
7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Standard Arbors: 2L, 5L
MINI KIT



PLUMBER'S KITS



30860C600P
9 PIECE KIT
3/4", 7/8", 1-1/8", 1-3/8", 2", 2-1/2"
Standard Arbors: 2L, 5L
One Arbor adaptor
MEDIUM KIT



30808600P
10 PIECE KIT
3/4", 7/8", 1-1/8", 1-1/2", 1-3/4", 2-1/4"
Standard Arbors: 2L, 5L
One pilot drill
One Arbor adaptor
LARGE KIT



1853786
10 PIECE KIT
2-1/8", 2-1/4", 2-9/16", 2-3/4",
3-5/8", 4", 4-5/8"
Standard Arbor: 2L
Two pilot drills
LARGE KIT



308011200P
17 PIECE KIT
3/4", 7/8", 1-1/8", 1-1/2", 1-3/4", 2-1/4",
2-9/16", 3", 3-1/2", 4", 4-1/4", 4-1/2"
Standard Arbors: 2L, 5L
Three pilot drills
LARGE KIT



1815195
7 PIECE KIT
1-1/4", 1-3/8", 1-1/2", 2", 2-1/2"
Standard Arbors: 2L, 5L
MINI KIT

REFRIGERATION KIT



30830600R
8 PIECE KIT
5/8", 7/8", 1-1/8",
1-3/8", 1-5/8", 2-1/8"
Standard Arbors:
5L, 6L
MEDIUM KIT

WELDER'S KIT



14789600W
9 PIECE KIT
3/4", 7/8", 1", 1-1/4",
1-1/2", 2"
Standard Arbors:
2L, 5L
One Arbor adaptor
MEDIUM KIT

AUTOMOTIVE KIT



30805500A
7 PIECE KIT
3/4", 7/8", 1",
1-1/8", 1-1/4"
Standard Arbor: 5L
One Arbor adaptor
COMPACT KIT



SNAP-BACK™ ARBORS

No Tools. No Adaptors. No Screwing Around.

QUICK CHANGE

Faster and easier to engage/disengage hole saw

PREVENTS THREADS FROM STRIPPING

Drives off pins, not threads

NO TOOLS NEEDED

Prevents hole saw from locking on arbor

NO ADAPTOR REQUIRED

Standard Arbor threads directly into all hole saws

EASIER PLUG REMOVAL



Pull

Twist

Snap

PROD NO	DESC	FITS HOLE SAWS	SIZES		THREAD SIZE	SHANK TYPE	SHANK SIZE	
			IN	MM			IN	MM
1779772	2L	20L-96L	1-1/4-6	31.8-152.4	5/8-18	Solid Hex	1/2 & larger	12.7 & larger
1779669	5L	9L-19L	9/16-1-3/16	14-30	1/2-20	Solid Hex	3/8 & larger	9.5 & larger
1779670	6L	20L-96L	1-1/4-6	31.8-152.4	5/8-18	Solid Hex	3/8 & larger	9.5 & larger

Solid Hex



2L



5L



6L

SNAP-BACK QUICK CHANGE EXTENSIONS

DURABILITY AND EXTENDED LIFE

Carbon steel collar and shaft for durability and extended life

ONE-HANDED RELEASE

SNAP-BACK Quick Change mechanism for quick and easy release

BIT HELD SECURELY IN PLACE

Holds bits securely on ball detent bits (Quick Change)

1/4" extension works with 1/4" arbors and insert bits.

It is magnetic for additional holding power



Quick Change Shank



1852050

1906836

1852047

1852048

1852049

PROD NO	IN	MM	CHUCK SIZE		FITS ARBOR	
			IN	MM	SNAP-BACK	STANDARD
1852050	5-1/2	140	7/16	11	2L	1L, 2L, 3L
1906836	12	305	1/4	6.4	—	4L
1852047	12	305	3/8	9.5	5L, 6L	5L, 6L, 7L
1852048	12	305	7/16	11	2L	1L, 2L, 3L
1852049	18	457	7/16	11	2L	1L, 2L, 3L

STANDARD ARBORS & ACCESSORIES


Arbors & Accessories for All Your Drilling Needs

ADDED DURABILITY

Hardened carbon steel for strength

STARTS ON CONTACT

Split point pilot drill for faster penetration and less walking

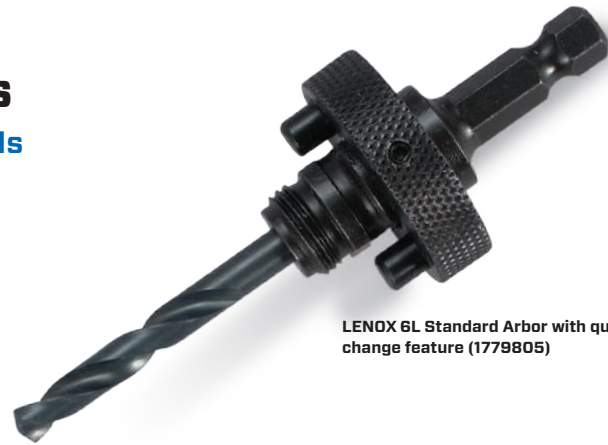

LENOX 6L Standard Arbor with quick change feature (1779805)

PROD NO	DESC	FITS HOLE SAWS	SIZES		SHANK TYPE	SHANK SIZE		PRIMARY FEATURE
			IN	MM		IN	MM	
1779774	1L	9L-19L	9/16-1-3/16	14.3-30.2	Hollow Hex	1/2 & larger	12.7 & larger	Adjustable pilot bit
1779801	2L	20L-96L	1-1/4-6	31.8-152.4	Solid Hex	1/2 & larger	12.7 & larger	Use for enlarging holes
1779802	3L	20L-96L	1-1/4-6	31.8-152.4	Solid Hex	1/2 & larger	12.7 & larger	Solid shank
1779803	4L	9L-19L	9/16-1-3/16	14.3-30.2	3 Sided	1/4 & larger	6.4 & larger	Adjustable pilot bit, 3 flats on shank
1779804	5L	9L-19L	9/16-1-3/16	14.3-30.2	Hex	3/8 & larger	9.5 & larger	Use for 9A-19A arbored hole saws
1779805	6L	20L-96L	1-1/4-6	31.8-152.4	Hex	3/8 & larger	9.5 & larger	Quick change arbor
1779806	7L	24L-96L	1-1/2-6	31.8-152.4	Hex	3/8 & larger	9.5 & larger	Plug ejection feature

PROD NO	DESCRIPTION	CHUCK SIZE		FITS ARBOR	
		IN	MM	SNAP BACK	SOLID HEX
1779771	4-1/4" Pilot Drill (1 pack)	1/4	6.4	—	1L, 4L
1779841	4-1/4" Pilot Drill (25 pack)	1/4	6.4	—	1L, 4L
1779810	3-1/4" Pilot Drill (1 pack)	1/4	6.4	2L, 5L, 6L	2L, 3L, 5L, 6L, 7L
1864904	3-1/4" Pilot Drill (25 pack)	1/4	6.4	2L, 5L, 6L	2L, 3L, 5L, 6L, 7L
30297123CT	Carbide Tipped Pilot Drill (1 pack)	1/4	6.4	—	1L, 4L
3029865CTPD	Carbide Tipped Pilot Drill (1 pack)	1/4	6.4	2L, 5L, 6L	2L, 3L, 5L, 6L, 7L
30857AA1	Standard Arbor Adaptor (1 pack)	—	—	5L	1L, 4L, 5L
3084818X	18" Extension (1 pack)	1/2 & larger	12.7 & larger	2L	1L, 2L, 3L
3084712X	12" Extension (1 pack)	1/2 & larger	12.7 & larger	2L	1L, 2L, 3L
3084310X*	10" Extension (1 pack)	3/8 & larger	9.5 & larger	5L, 6L	5L, 6L, 7L
3084655X	5-1/2" Extension (1 pack)	1/2 & larger	12.7 & larger	2L	1L, 2L, 3L
2910114	1/4" x 1/4" Set Screw	—	—	2L, 5L, 6L	2L, 3L, 5L, 6L, 7L
29102516	5/16" x 5/16" Set Screw	—	—	—	1L, 4L, Extension
3087935PD	1/4" Split point stubby pilot bit	—	—	—	—
308803CHCAS	Plug ejection springs	—	—	—	—

* Fits arbored hole saws





LENOX *DIAMOND*[™] HOLE SAWS

More Holes. Less Time.



NEW

LENOX DIAMOND™ HOLE SAWS

More Holes. Less Time.

LONG LASTING

Continuous, brazed edge lasts longer in tile and stone

DURABLE

Robust design for greater durability in tough applications

FAST, EASY CUTTING

Low torque, little pressure required

EASIER PLUG REMOVAL

Over-sized slot in hole saw for easy plug removal

USE STANDARD ARBOR, SNAP-BACK™ ARBOR FOR BEST RESULTS USE THE LENOX ARBOR WITH RETRACTABLE PILOT DRILL



ONE PIECE HOLE SAWS

1 PER PACK PROD NO	IN	MM	PIPE TAP		PIPE ENTRANCE		RPM*	
			IN	MM	IN	MM	MIN	MAX
121063DGDS	3/16	5	—	—	—	—	1500	2000
121074DGDS	1/4	6	—	—	—	—	2000	2500
121085DGDS	5/16	8	—	—	—	—	2000	2500
121096DGDS	3/8	10	—	—	—	—	2000	2500
121108DGDS	1/2	13	—	—	—	—	2000	2500
1211110DGDS	5/8	16	—	—	—	—	1500	2000
1211212DGDS	3/4	19	3/4	13	3/8	10	1500	2000
1211416DGDS	1	25	—	—	—	—	—	—
1211622DGDS	1-3/8	35	—	—	1	25	—	—
12158DGDS4A	4 pc kit Sizes: 3/16", 1/4", 5/16", 3/8"							



STANDARD HOLE SAWS

1 PER PACK PROD NO	IN	MM	PIPE TAP		PIPE ENTRANCE		USE ARBOR			RPM*	
			IN	MM	IN	MM	RETRACTABLE	SNAP-BACK	STANDARD	MIN	MAX
1211314DGHS	7/8	22	3/4	19	1/2	13	—	5L	1L, 4L, 5L	800	1200
1225618DGHS	1-1/8	29	1	25	3/4	19	—	5L	1L, 4L, 5L	500	900
1211520DGHS	1-1/4	32	—	—	—	—	5L 5/8-18	2L, 6L	2L, 3L, 6L	500	900
1211722DGHS	1-3/8	35	—	—	1	25	5L 5/8-18	2L, 6L	2L, 3L or 6L	500	900
1211824DGHS	1-1/2	38	1-1/4	32	—	—	5L 5/8-18	2L, 6L	2L, 3L, 6L, 7L	500	900
1211932DGHS	2	51	—	—	1-1/2	38	5L 5/8-18	2L, 6L	2L, 3L, 6L, 7L	400	800
1212040DGHS	2-1/2	64	—	—	2	51	5L 5/8-18	2L, 6L	2L, 3L, 6L, 7L	200	600

*Suggested RPMs only: Porcelain, Ceramic, Slate, Granite, Marble, Glass, Fiberglass, Travertine, Cement Board, Laminates

NEW

ARBOR WITH RETRACTABLE PILOT DRILL

CENTERING PIN ELIMINATES WALKING

CARBIDE TIPPED FOR LONGER LIFE



PROD NO	DESC	FITS DIAMOND HOLE SAWS	SIZES		SHANK TYPE	SHANK SIZE	
			IN	MM		IN	MM
1970538	5L 5/8-18	Standard	1-1/4-2-1/2	32-64	Solid Hex	3/8 & larger	9.5 & larger

PROD NO	DESCRIPTION	CHUCK SIZE		FITS ARBOR SOLID HEX
		IN	MM	
1970540	Retractable Pilot Drill	1/4	6.4	5L 5/8-18

LENOX DIAMOND KIT



1853785 10 PIECE KIT

1/4", 3/4", 7/8", 1-1/8", 1-3/8",
2", 2-1/2"

Arbors: 2L, 5L Hex Wrench

LARGE KIT

CARBIDE GRIT HOLE SAWS

Best for Cutting Abrasive Materials

CUTS ABRASIVE MATERIALS

Tungsten carbide grit cuts through fiberglass, ceramic tile, laminates and other abrasive materials

CLEAN CUTTING

Carbide grit edge will not snag or chip when cutting thin materials

USE STANDARD ARBOR OR SNAP-BACK™ ARBOR



1 PER BOX	DIAMETER		PIPE TAP		PIPE ENTRANCE		USE ARBOR		RECOMMENDED RPM ONLY		
PROD NO	IN	MM	IN	MM	IN	MM	SNAP-BACK	STANDARD	BRICK, DRYWALL, PORCELAIN, MARBLE, CERAMIC TILE	SLATE, FIBERGLASS, PARTICLE BOARD, LAMINATES, GRANITE, CEMENT	CAST IRON
2991212CG	3/4	19.1	1/2	12.7	3/8	9.5	—	1L, 4L	800	900	600
2999820MMCG	25/32	19.8	—	—	—	—	—	1L, 4L	800	900	600
2991414CG	7/8	22.2	3/4	19.1	1/2	12.7	—	1L, 4L	800	900	600
2991616CG	1	25.4	—	—	—	—	—	1L, 4L	800	900	600
2991818CG	1-1/8	28.6	1	25.4	3/4	19.1	—	1L, 4L	500	600	400
2992020CG	1-1/4	31.8	—	—	—	—	2L	2L	500	600	400
2992222CG	1-3/8	34.9	—	—	1	25.4	2L	2L	500	600	400
2992424CG	1-1/2	38.1	1-1/4	31.8	—	—	2L	2L, 7L	500	600	400
2992828CG	1-3/4	44.5	1-1/2	38.1	1-1/4	31.8	2L	2L, 7L	500	600	400
2993232CG	2	50.8	—	—	1-1/2	38.1	2L	2L, 7L	400	500	200
2993434CG	2-1/8	54	—	—	—	—	2L	2L, 7L	400	500	200
2993636CG	2-1/4	57.2	2	50.8	—	—	2L	2L, 7L	400	500	200
2993838CG	2-3/8	60.3	—	—	—	—	2L	2L, 7L	200	300	100
2994040CG	2-1/2	63.5	—	—	2	50.8	2L	2L, 7L	200	300	100
2994141CG	2-9/16	65.1	—	—	—	—	2L	2L, 7L	200	300	100
2994848CG	3	76.2	—	—	2-1/2	63.5	2L	2L, 7L	200	300	100
2995252CG	3-1/4	82.6	3	76.2	—	—	2L	2L, 7L	200	300	100
2995858CG	3-5/8	92.1	—	—	3	76.2	2L	2L, 7L	100	200	100
2996464CG	4	101.6	—	—	—	—	2L	2L, 7L	100	200	100
2996666CG	4-1/8	104.8	—	—	3-1/2	88.9	2L	2L, 7L	100	200	100

PLUMBER'S KIT



29984600CGP 9 PIECE

3/4", 7/8", 1-1/8", 1-1/2",
2-1/8", 2-9/16"
Arbors: 1L, 2L

One arbor adaptor

MEDIUM KIT

CONTRACTOR'S KIT



29985700CGK 10 PIECE

7/8", 1", 1-1/4", 1-3/8", 1-1/2",
1-3/4", 2-1/8"
Arbors: 1L, 2L

One arbor adaptor

MEDIUM KIT





CARBIDE TIPPED HOLE SAWS

Designed for Cutting Tile and Stainless Steel

LONG TOOL LIFE

Heat resistant carbide teeth for long life in tile and stainless steel

ADDED DURABILITY

Thick backing plate resists damage and increases life

UNIQUE TOOTH CONFIGURATION

Engineered design provides ability to cut in stainless steel like no other

USE STANDARD ARBOR OR SNAP-BACK™ ARBOR



PLUMBER'S KIT



30294600CTP 8 PIECE

3/4", 7/8", 1-1/8",
1-1/2", 1-3/4", 2-1/4"
Arbors: 1L, 2L

MEDIUM KIT



ELECTRICIAN'S KIT



30295600CTL 8 PIECE

7/8", 1-1/8", 1-3/8",
1-3/4", 2", 2-1/2"
Arbors: 1L, 2L

MEDIUM KIT

CONTRACTOR'S KIT




302901100CTG 15 PIECE

3/4", 7/8", 1", 1-1/8", 1-1/4",
1-3/8", 1-1/2", 1-3/4", 2",
2-9/16", 3". Arbors: 1L, 2L
Two pilot drills

LARGE KIT

CARBIDE TIPPED HOLE SAWS

Designed for Cutting Tile and Stainless Steel



1 PER PACK	DIAMETER		PIPE TAP		PIPE ENTRANCE		USE ARBOR		RECOMMENDED RPM				
PROD NO	IN	MM	IN	MM	IN	MM	SNAP- BACK	STANDARD	ALUM	STAIN- LESS STEEL	FIBER- GLASS	CERAMIC TILE	CAST IRON
3021111CT	11/16	17.5	—	—	—	—	5L	1L, 4L, 5L	—	—	—	—	—
3021212CT	3/4	19.1	1/2	12.7	3/8	9.5	5L	1L, 4L, 5L	1700	410	250	500	410
3021414CT	7/8	22.2	3/4	19.1	1/2	12.7	5L	1L, 4L, 5L	1500	180	210	430	180
3021616CT	1	25.4	—	—	—	—	5L	1L, 4L, 5L	1300	150	190	370	150
3021818CT	1-1/8	28.6	1	25.4	3/4	19.1	5L	1L, 4L, 5L	1100	140	170	330	140
3022020CT	1-1/4	31.8	—	—	—	—	2L	2L, 3L, 6L	—	—	—	—	—
3022222CT	1-3/8	34.9	—	—	1	25.4	2L	2L, 3L, 6L	900	110	140	270	110
3022424CT	1-1/2	38.1	1-1/4	31.8	—	—	2L	2L, 3L, 6L, 7L	900	110	140	270	110
3022626CT	1-5/8	41.3	—	—	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3022828CT	1-3/4	44.5	1-1/2	38.1	1-1/4	31.8	2L	2L, 3L, 6L, 7L	700	90	110	210	90
3023232CT	2	50.8	—	—	1-1/2	38.1	2L	2L, 3L, 6L, 7L	600	80	90	190	80
3023434CT	2-1/8	54.0	—	—	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3023636CT	2-1/4	57.2	2	50.8	—	—	2L	2L, 3L, 6L, 7L	600	70	80	170	70
3023838CT	2-3/8	60.3	—	—	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3024040CT	2-1/2	63.5	—	—	2	50.8	2L	2L, 3L, 6L, 7L	500	60	70	150	60
3024141CT	2-9/16	65.1	—	—	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3024242CT	2-5/8	66.7	2-1/2	63.5	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3024343CT	2-11/16	68.3	—	—	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3024848CT	3	76.2	—	—	2-1/2	63.5	2L	2L, 3L, 6L, 7L	400	50	60	120	50
3025252CT	3-1/4	82.6	3	76.2	—	—	2L	2L, 3L, 6L, 7L	400	50	60	120	50
3025454CT	3-3/8	85.7	—	—	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3025656CT	3-1/2	88.9	—	—	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3025858CT	3-5/8	92.1	—	—	3	76.2	2L	2L, 3L, 6L, 7L	400	40	50	100	40
3026060CT	3-3/4	95.3	3-1/2	88.9	—	—	2L	2L, 3L, 6L, 7L	300	40	50	100	40
3026464CT	4	101.6	—	—	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3026666CT	4-1/8	104.8	—	—	3-1/2	88.9	2L	2L, 3L, 6L, 7L	300	40	50	90	40
3026868CT	4-1/4	108.0	4	101.6	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3027272CT	4-1/2	114.3	—	—	—	—	2L	2L, 3L, 6L, 7L	—	—	—	—	—
3027676CT	4-3/4	120.7	4-1/2	114.3	4	101.6	2L	2L, 3L, 6L, 7L	300	30	40	80	30
3028080CT	5	127.0	—	—	—	—	2L	2L, 3L, 6L, 7L	200	30	40	80	30
3028888CT	5-1/2	139.7	—	—	—	—	2L	2L, 3L, 6L, 7L	200	30	40	70	30
3029696CT	6	152.4	—	—	—	—	2L	2L, 3L, 6L, 7L	100	30	30	60	30

Note: We recommend the use of a carbide tipped pilot drill when cutting ceramic tile. Pilot drill 123CT fits the SNAP-BACK 2L or standard arbors 1L, 2L, 4L or 7L. Pilot drill 65CTPD fits the SNAP-BACK 2L or standard arbors 5L and 6L.



CARBIDE HOLE CUTTERS

Designed Specifically for Sheet Metal Hole Cutting

ACCURATE, BURR-FREE HOLES

Precision ground carbide teeth for fast cutting of clean, round holes

WILL NOT DAMAGE WORK

Over-drill stopper prevents the tool from penetrating beyond the hole

STARTS ON CONTACT

Split point pilot bit for faster penetration and less walking



1 PER BOX PROD NO	DIAMETER		CONDUIT SIZE	USE ARBOR	
	IN	MM		SNAP-BACK	STANDARD
2009212CHC	3/4	19.1	3/8"	5L	5L
2009314CHC	7/8	22.2	1/2"	5L	5L
2009416CHC	1	25.4	—	5L	5L
2009618CHC	1-1/8	28.6	3/4"	5L	5L
20097195CHC	1-7/32	30.9	—	5L	5L
2009820CHC	1-1/4	31.8	—	—	3L, 6L
2010022CHC	1-3/8	34.9	1"	—	3L, 6L
2010224CHC	1-1/2	38.1	—	—	3L, 6L
2010328CHC	1-3/4	44.5	1-1/4"	—	3L, 6L
2010432CHC	2	50.8	1-1/2"	—	3L, 6L
2010534CHC	2-1/8	54.0	—	—	3L, 6L
2010840CHC	2-1/2	63.5	2"	—	3L, 6L
2010942CHC	2-5/8	66.7	—	—	3L, 6L
2011344CHC	2-3/4	69.9	—	—	3L, 6L
2011448CHC	3	76.2	2-1/2"	—	3L, 6L
3087935PD	1/4" Split point stubby pilot bit		—	—	—
308803CHCAS	Plug ejection springs		—	—	—

ELECTRICIAN'S KITS



30877300CHC 12 PIECE KIT

7/8", 1-1/8", 1-3/8". Arbors: 3L, 5L
1/4" split point pilot bit. Plug ejection
springs, 1/8" hex wrench

COMPACT KIT



30878500CHC 15 PIECE KIT

7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Arbors: 3L, 5L. 1/4" split point pilot bit
Plug ejection springs, 1/8" hex wrench

MEDIUM KIT

CARBIDE GRIT RECESSED LIGHTING HOLE SAWS

Best for Cutting Abrasive Materials

LONG LIFE

Hard tungsten carbide grit edge for a long life in abrasive materials

FAST, EASY CUTTING

Continuous cutting edge for smooth cutting

LIMITS DUST / DEBRIS

Solid back design collects dust and debris



1 PER BOX PROD NO	DIAMETER		FOR FIXTURES	USE ARBOR	
	IN	MM		SNAP-BACK	STANDARD
30861438RL	4-3/8	111	Capri, Marco, Halo, Mini-Juno	2L	2L
12100538RL	5-3/8	137	Capri, Marco, Halo, Mini-Juno, Lightolier®	2L	2L
30862638RL	6-3/8	162	Capri, Halo, Pathway & Thomas	2L	2L
30863658RL	6-5/8	168	Juno, Progress & Pathway	2L	2L
30864678RL	6-7/8	175	Capri, Hubbell®, Lightolier®, Lithonia®, Marco, Prescolite®, & Progress	2L	2L

Use 123CT or 1779771 Pilot Drill

HALO is a registered trademark of Halo Lighting, JUNO is a registered trademark of Juno Lighting Inc.,
LITHONIA is a registered trademark of Lithonia, Inc., LIGHTOLIER is a registered trademark of Lightolier, Inc.,
and PRESCOLITE is a registered trademark of Prescolite, Inc.

ONE TOOTH® ROUGH WOOD HOLE CUTTER

Drills Faster Than Self-Feed Bits

LONG LASTING

High speed steel tooth provides long tool life

CUTS FAST / LOW TORQUE

Designed to run at high speeds with very little torque

DURABLE WOOD CUTTING TOOL

Cuts wet, frozen, pressure treated and hard wood without binding

EASY PLUG REMOVAL

Patented design allows easy plug removal

CUTS AT AN ANGLE

Unique design provides the ability to cut at an angle

USE STANDARD ARBOR OR SNAP-BACK™ ARBOR

For optimal performance use a 3/8" Stubby Spade Bit with Standard Arbor



1 PER PACK PROD NO	CUTTER SIZE		CUTTING DEPTH		APPLICATION	USE ARBOR	
	IN	MM	IN	MM		SNAP-BACK	STANDARD
2542222HC	1-3/8	34.9	2-7/16"	62	1" pipe & lock installation	2L	2L, 3L
2543434HC	2-1/8	54.0	2-7/16"	62	1-1/2" pipe & lock installation	2L	2L, 3L
2543636HC	2-1/4	57.2	2-7/16"	62	1-1/2" pipe & 45°/90° bend couplings	2L	2L, 3L
2544141HC	2-9/16	65.1	2-7/16"	62	2" pipe	2L	2L, 3L
2544444HC	2-3/4	69.9	2-7/16"	62	2" pipe & 45°/90° bend couplings	2L	2L, 3L
2545454HC	3-3/8	85.7	2-7/16"	62	3" duct pipe & bendable duct pipe	2L	2L, 3L
2545656HC	3-5/8	92.1	2-7/16"	62	3" pipe	2L	2L, 3L
2546464HC	4	101.6	2-7/16"	62	3" pipe & coupling & dryer vent	2L	2L, 3L
2546969HC	4-5/16	109.5	2-7/16"	62	4" duct pipe & bendable duct pipe	2L	2L, 3L
2547474HC	4-5/8	117.5	2-7/16"	62	4" pipe	2L	2L, 3L
2548080HC	5	127.0	2-7/16"	62	4" pipe & coupling	2L	2L, 3L
2548787HC	5-1/2	139.7	2-7/16"	62	Toilet flange	2L	2L, 3L
2550000HC	6-1/4	158.8	2-7/16"	62	6" duct pipe	2L	2L, 3L
25310SB38	—	—	—	—	3/8" stubby spade bit	2L	2L, 3L
25312DIAF1	—	—	—	—	Diamond file for re-sharpening	—	—

ONE TOOTH HOLE CUTTER KITS



25476301G
7 PIECE
2-1/8", 2-9/16", 3-5/8"
Arbor: 2L, Diamond file
Two 3/8" stubby spade bits
LARGE KIT



25477701G
11 PIECE
2-1/8", 2-1/4", 2-9/16", 2-3/4",
3-5/8", 4", 4-5/8"
Arbor: 2L, Diamond file
Two 3/8" stubby spade bits
LARGE KIT





CARBIDE TIPPED

DIAMETER		ALUM	PLASTIC	FIBER- GLASS	CERAMIC TILE	PARTICLE BOARD	CAST IRON	COMPUTER FLOORING
IN	MM							
3/4	19.1	1700	3430	250	500	3430	410	550
7/8	22.2	1500	2940	210	430	2940	180	470
1	25.4	1300	2570	190	370	2570	150	410
1-1/8	28.6	1100	2290	170	330	2290	140	370
1-3/8	34.9	900	1870	140	270	1870	110	300
1-1/2	38.1	900	1710	120	250	1710	100	270
1-3/4	44.5	700	1470	110	210	1470	90	240
2	50.8	600	1290	90	190	1290	80	210
2-1/4	57.2	600	1140	80	170	1140	70	180
2-1/2	63.5	500	1030	70	150	1030	60	160
3	76.2	400	860	60	120	860	50	140
3-1/4	82.6	400	790	60	110	790	50	130
3-5/8	92.1	400	710	50	100	710	40	110
3-3/4	95.3	300	690	50	100	690	40	110
4-1/8	104.8	300	620	50	90	620	40	100
4-3/4	120.7	300	540	40	80	540	30	90
5	127.0	200	480	40	80	500	30	90
5-1/2	139.7	200	420	40	70	460	30	80
6	152.4	100	360	30	60	420	30	60

Suggested RPMs only

CARBIDE GRIT

DIAMETER		BRICK, DRYWALL, PORCELAIN, MARBLE CERAMIC TILE	SLATE, FIBERGLASS, CEMENT & PARTICLE BOARD LAMINATES, GRANITE	CAST IRON
IN	MM			
3/4	19.1	800	900	600
25/32	19.8	800	900	600
7/8	22.2	800	900	600
1	25.4	800	900	600
1-1/8	28.6	500	600	400
1-1/4	31.8	500	600	400
1-3/8	34.9	500	600	400
1-1/2	38.1	500	600	400
1-3/4	44.5	500	600	400
2	50.8	400	500	200
2-1/8	54.0	400	500	200
2-1/4	57.2	400	500	200
2-3/8	60.3	200	300	100
2-1/2	63.5	200	300	100
2-9/16	65.1	200	300	100
2-5/8	66.7	200	300	100
3	76.2	200	300	100
3-1/4	82.6	100	200	100
3-5/8	92.1	100	200	100
4	101.6	100	200	100
4-1/8	104.8	100	200	100

Suggested RPMs only

LENOX DIAMOND™ HOLE SAWS

PORCELAIN, CERAMIC, SLATE, GRANITE, MARBLE, GLASS, FIBERGLASS, TRAVERTINE,
CEMENT BOARD, LAMINATES

ONE PIECE			STANDARD		
DIAMETER			DIAMETER		
IN	MM		IN	MM	
3/16	5	1500-2000	7/8	22.2	800-1200
1/4	6	2000-2500	1-1/18	28.6	500-900
5/16	8	2000-2500	1-1/4	31.8	500-900
3/8	10	2000-2500	1-3/8	34.9	500-900
1/2	13	2000-2500	1-1/2	38.1	500-900
5/8	15	1500-2000	2	50.8	400-800
3/4	19.1	1500-2000	2-1/2	63.5	200-600


Suggested RPMs only

Suggested RPMs only



METAL AND WOOD DRILLING

LENOX® VARI-BIT® Step Drill Bits	90
Bi-metal Ship Auger Bits	91
Bi-metal Utility Bits.....	92
Bi-metal Self-Feed Bits	93





LENOX VARI-BIT® STEP DRILL BITS

Drills Fast, Clean, Round Holes

ACCURATE, BURR-FREE HOLES

Patented two flute design cuts fast, clean, round holes

STARTS ON CONTACT

Split point design for faster penetration and less walking

LONG TOOL LIFE

Steam oxide coating adds durability. Enhanced flute design removes chips rapidly. Use of LENOX PROTOOL LUBE® recommended to extend tool life



1 PER PACK PROD NO		HOLE SIZES		#OF HOLE SIZES	SHANK SIZE	
		IN	MM		IN	MM
30881VB1		1/8, 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 13/32, 7/16, 15/32, 1/2	3.2, 4.0, 4.8, 5.6, 6.4, 7.1, 7.9, 8.7, 9.5, 10.3, 11.1, 11.9, 12.7	13	1/4	6.4
30882VB2		1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1	12.7, 14.3, 15.9, 17.5, 19.1, 20.6, 22.2, 23.8, 25.4	9	3/8	9.5
30883VB3		1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4	6.4, 7.9, 9.5, 11.1, 12.7, 14.3, 15.9, 17.5, 19.1	9	3/8	9.5
30884VB4		3/16, 1/4, 5/16, 3/8, 7/16, 1/2	4.8, 6.4, 7.9, 9.5, 11.1, 12.7	6	1/4	6.4
30886VB6		3/8, 1/2	9.5, 12.7	2	1/4	6.4
30887VB7		7/8 (for 1/2 conduit)	22.2 (for 12.7 conduit)	1	3/8	9.5
30908VB8		3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8	4.8, 6.4, 7.9, 9.5, 11.1, 12.7, 14.3, 15.9, 17.5, 19.1, 20.6, 22.2	12	3/8	9.5
30909VB9		7/8, 1-1/8, 1-7/32	22.2, 28.6, 31.0	3	3/8	9.5
30888VB11		7/8, 1-1/8 (for 1/2 and 3/4 conduit)	22.2, 28.6 (for 12.7 and 19.1 conduit)	2	3/8	9.5
30912VB12		7/8, 1-1/8, 1-7/32, 1-1/4, 1-3/8	22.2, 28.6, 31.0, 31.8, 34.9	5	3/8	9.5
30925VBX8		8" (203mm) Extension. Fits 3/8 (9.5mm) shank & larger. 1 per pack.		-	3/8	9.5



**30889889
3 PIECE KIT**
VB1, VB2,
VB3
COMPACT KIT



**30926VBK4
4 PIECE KIT**
VB1, VB2,
VB7, VB8
COMPACT KIT



**30929VB30929
4 PIECE KIT**
VB1, VB3,
VB8, VB12
COMPACT KIT



**30927VBKA6
6 PIECE KIT**
VB1, VB2, VB6,
VB7, VB8, VB11
COMPACT KIT

BI-METAL SHIP AUGER BITS

Tougher than Nails

EXTREME DURABILITY

High speed steel cutting edge for superior durability in nail-embedded wood

LONGER LIFE

High speed steel screw tip increases wear resistance for extended life

FAST, EASY DRILLING

Unique parabolic screw tip pulls the bit through material quickly and effortlessly

RESHARPENABLE

Resharpener with LENOX Diamond File (prod no. 25312DIAF1)



	PROD NO	HOLE DIAMETER		OVERALL LENGTH		TWIST LENGTH	
		IN	MM	IN	MM	IN	MM
7-1/2" SHIP AUGER BITS	1455507A1016	5/8	16	7-1/2	191	4	102
	1455607A1116	11/16	18	7-1/2	191	4	102
	1455707A1216	3/4	19	7-1/2	191	4	102
	1455807A1316	13/16	21	7-1/2	191	4	102
	1455907A1416	7/8	22	7-1/2	191	4	102
	1456007A1516	15/16	24	7-1/2	191	4	102
	1456107A1616	1	25	7-1/2	191	4	102
	1456207A1716	1-1/16	27	7-1/2	191	4	102
	1456307A1816	1-1/8	29	7-1/2	191	4	102
	1456407A2016	1-1/4	32	7-1/2	191	4	102
	1456507A2216	1-3/8	35	7-1/2	191	4	102
	1456607A2416	1-1/2	38	7-1/2	191	4	102

	PROD NO	HOLE DIAMETER		OVERALL LENGTH		TWIST LENGTH	
		IN	MM	IN	MM	IN	MM
18" SHIP AUGER BITS	145390080616*	3/8	10	18	457	12	305
	145400080716*	7/16	11	18	457	12	305
	145410080816	1/2	13	18	457	12	305
	145420080916	9/16	14	18	457	12	305
	145430081016	5/8	16	18	457	12	305
	145440081116	11/16	18	18	457	12	305
	145450081216	3/4	19	18	457	12	305
	145460081316	13/16	21	18	457	12	305
	145470081416	7/8	22	18	457	12	305
	145480081516	15/16	24	18	457	12	305
	145490081616	1	25	18	457	12	305
	145500081716	1-1/16	27	18	457	12	305
	145510081816	1-1/8	29	18	457	12	305
	145520082016	1-1/4	32	18	457	12	305
	145530082216	1-3/8	35	18	457	12	305
	145540082416	1-1/2	38	18	457	12	305

*3/8" shank—all others 1/2" shank



1787507 15 PIECE, SELF-FEED BIT/ AUGER KIT

Augers: 7/8", 1-1/8", 1-1/4". Length: 7-1/2"
Self-feed bits: 1-1/2", 1-3/4", 2-1/8", 2-9/16"
Extension: 5-1/2". Five lead screws
Hex Wrench Set

LARGE KIT



BI-METAL UTILITY BITS

Tougher Than Nails

EXTREME DURABILITY

High speed steel cutting edges provide long life in tough applications, including nail-embedded wood

OPTIMIZED FOR CORDLESS DRILLING

Smooth, effortless drilling extends battery life

FAST CLEAN CUTTING

Three cutting edges enhance chip removal for a fast, clean hole

FAST, EASY DRILLING

Aggressive lead screw tip pulls the bit through material quickly and effortlessly



RESHARPENABLE
Resharpen with LENOX
Diamond File (25312DIAF1)



PROD NO	HOLE SIZE		OVERALL LENGTH	
	IN	MM	IN	MM
1094706A1016	5/8*	16	6	152
1094806A1216	3/4	19	6	152
1094906A1416	7/8	22	6	152
1095006A1616	1	25	6	152
1095106A1816	1-1/8	29	6	152
1095206A2016	1-1/4	32	6	152
1095306A2216	1-3/8	35	6	152


*1/4" shank—all others 3/8" shank



Fits Cordless Drill



3 Cutting Edges



Steel Cutting Edge



10954300S
3 PIECE SET
3/4", 7/8", 1"



14787300PS
3 PIECE
PLUMBER'S SET
7/8", 1-1/8", 1-3/8"



10955500K
5 PIECE KIT
3/4", 7/8", 1", 1-1/8",
1-1/4"
COMPACT KIT



14788500PK
5 PIECE
PLUMBER'S KIT
3/4", 7/8", 1", 1-1/8", 1-3/8"
COMPACT KIT

BI-METAL SELF-FEED BITS

Tougher than Nails

EXTREME DURABILITY

High speed steel cutting edge for superior durability in nail-embedded wood

Stays sharper longer

CLEAN HOLES AND EASY REMOVAL

Chamfered edge allows bit to be removed easily after drilling

Flutes remove excess wood chips

FAST, EASY DRILLING

Aggressive lead screw tip pulls the bit through material quickly and effortlessly

INCREASED VALUE

Extra lead screw and wrench included in every package

DEEPER CUTS

Longer shank that cuts 4"x 4" without extension

QUICK CHANGE

Impact hex shank allows for quick changing of the bits



RESHARPENABLE
Resharpener with LENOX
Diamond File (25312DIAF1)



Chamfered Edge
& Flutes



Lead Tip
Screw



High Speed Steel

PROD NO	HOLE DIAMETER		ENTRANCE FOR PIPE RIGID CONDUIT		ENTRANCE FOR TUBING	
	IN	MM	IN	MM	IN	MM
1787511	1	25	1/2	12.7	7/8	22.2
1787512	1-1/8	29	1/2	12.7	1	25.4
1787513	1-1/4	32	3/4	19	1-1/8	28.6
1787515	1-3/8	35	1	25.4	1-1/4	31.8
1787561	1-1/2	38	—	—	1-3/8	34.9
1787562	1-3/4	45	1-1/4	31.8	1-1/2	38.1
1787563	2	51	1-1/2	38.1	1-7/8	47.6
1787564	2-1/8	54	—	—	2	50.8
1787565	2-1/4	57	—	—	2-1/8	54
1787566	2-9/16	65	2	50	2-1/2	63.5
1787502	3	76	2-1/2	63	2-7/8	73
1787503	3-5/8	92	3	76.2	3-1/2	88.9
1787504	4-5/8	118	4	101.6	4-1/2	114.3

ACCESSORIES

PROD NO	DESCRIPTION	FITS	QTY PER PACK
1787602	Self-Feed Lead Screws	1"- 1-3/8"	5
1787604	Self-Feed Lead Screws	1-1/2"- 2-9/16"	5
1787603	Self-Feed Lead Screws	3"- 4-5/8"	5
1787605	Self-Feed Set Screws	—	5
1787508	Hex Wrench Set, 1/8"	—	2
3084655X	5-1/2" shank extension*	—	1
3084712X	12" shank extension*	—	1
3084818X	18" shank extension*	—	1
25312DIAF1	Diamond File	—	1

*All have 1/2" (13mm) hex shank with 2 set screws to lock BI-METAL SELF-FEED BIT in place



1787505 12 PIECE SELF-FEED KIT

1-3/8", 1-1/2", 2-1/8", 2-9/16"
Extension: 5-1/2" Five lead
screws. Hex Wrench Set

LARGE KIT



1787506 16 PIECE SELF-FEED KIT

1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-3/4",
2-1/8", 2-9/16" Extensions: 5-1/2", 12"
Five lead screws Hex Wrench Set

LARGE KIT




1787507 15 PIECE SELF-FEED BIT/ AUGER KIT

Augers: 7/8", 1-1/8", 1-1/4", Length: 7-1/2"
Self-feed bits: 1-1/2", 1-3/4", 2-1/8", 2-9/16"
Extension: 5-1/2", Five lead screws
Hex Wrench Set

LARGE KIT






***HAND*TOOLS**

T2™ Hacksaw Blades	97
Hacksaw Frames	98
Hand Saws	100
Snips & HVAC Tools	101
Locking Tradesman Utility Knife & Utility Knives.....	102
Utility Blades, Safety Knife & Blades.....	103
Tubing Cutters	104





T2™ TECHNOLOGY HACKSAW BLADES

Up to 2X Life

T2 TECHNOLOGY

A new blade design that delivers up to 100% longer blade life versus the prior generation of LENOX hacksaw blades

SHATTER RESISTANT

Bi-metal construction allows blades to bend and flex without breaking

CUTS THROUGH TOUGH METALS:

- Black Pipe
- Unistrut®
- Copper Pipe
- Hardened Steel
- Threaded Rod
- Rebar



TPI	LENGTH X WIDTH		1-PACK PROD NO	2-PACK PROD NO	10-PACK PROD NO	100-PACK PROD NO	APPLICATION
	IN	MM					
14	12 x 1/2	300 x 12.7	—	—	20143V214HE	—	Wood and Metal
18	10 x 1/2	250 x 12.7	20150S018HE	20163T018HE	20140V018HE	20110018HE	Heavy Metal
18	12 x 1/2	300 x 12.7	20154S218HE	20160T218HE	20144V218HE	1781387-218HE	Heavy Metal
24	10 x 1/2	250 x 12.7	20151S024HE	23930T024HE	20141V024HE	20111024HE	Medium Metal
24	12 x 1/2	300 x 12.7	20155S224HE	20161T224HE	20145V224HE	1781388-224HE	Medium Metal
32	10 x 1/2	250 x 12.7	20152S032HE	20164T032HE	20142V032HE	20112032HE	Thin Metal
32	12 x 1/2	300 x 12.7	20156S232HE	20162T232HE	20146V232HE	1781389-232HE	Thin Metal



HT50 HIGH TENSION HACKSAW

50,000 PSI

HIGHEST TENSION. EVER

Unique I-beam construction allows blade to tension up to 50,000 psi, resulting in fast, straight cuts

COMFORTABLE GRIPS

Rubberized handles allow for confident handling even in wet or cold environments

CONVERT TO A JAB SAW

Accepts any LENOX reciprocating saw blade to be used as a jab saw

CONVENIENT BLADE STORAGE

Store up to 5 extra 12" hacksaw blades in the I-Beam



PROD NO

12132HT50

BLADE SPECIFICATION

12" (300mm) 24TPI Hacksaw Blade



Tension



Use as a Jab Saw



Stores up to 5 Blades



Comfort Grips

5012 LOW PROFILE HACKSAW

40,000 PSI

HIGH TENSION

Allows blade to tension up to 40,000 PSI, resulting in fast, straight cuts

FITS INTO TIGHT SPOTS

Low profile tip easily handles close-quarter cuts

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications



Flush Cutting

PROD NO

209205012

BLADE SPECIFICATION

12" (300mm) 24TPI Hacksaw Blade

88300 LIGHTWEIGHT HACKSAW

30,000 PSI

HIGH TENSION

Saw will tension up to 30,000 PSI

EASILY ADJUST TENSION

ERGONOMIC GRIP

Front handle grip reduces fatigue in continuous cutting applications

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications

PROD NO

1213188300

BLADE SPECIFICATION

12" (300mm) 24TPI Hacksaw Blade



Flush Cutting



Comfort Grips

2012 COMPACT HACKSAW

20,000 PSI

ADJUSTABLE TENSION

Lightweight aluminum beam achieves tension up to 20,000 PSI

ERGONOMIC GRIP

Durable handle enables a confident grip in most work environments

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications

PROD NO

1805722

BLADE SPECIFICATION

12" (300mm) 24TPI Hacksaw Blade



Comfortable Grip

1512 ADJUSTABLE HACKSAW

15,000 PSI

EASILY ADJUST TENSION

Large front tensioning mechanism is easy to hold and adjust up to 15,000 PSI

ERGONOMIC GRIP

Rubberized grip allows for confident handling in any work environment

PROD NO

1805723

BLADE SPECIFICATION

12" (300mm) 24TPI Hacksaw Blade



Comfortable Grip



PVC/ABS

Plastic Pipe Hand Saw

CUTS PLASTIC PIPE EASILY

Cutting teeth cut on the pull stroke and not on the push stroke for safety

COMFORTABLE GRIPS

Rubberized handles allow for confident handling even in cold, hot, wet or dirty environments

FLUSH CUTTING OPTION

Easily mount the blade on the bottom of handle for flush cutting applications



Comfortable Handle



One Step Flush Cuttings

TPI	LENGTH		PROD NO	DESCRIPTION
	IN	MM		
10	12	304	20985HSF12	12" Blade & Handle
10	18	457	20980HSF18	18" Blade & Handle
10	12	304	20982HSB12	12" Replacement Blade
10	18	457	20981HSB18	18" Replacement Blade

FOLDING JAB AND UTILITY SAW

Designed for Cutting Multiple Materials

COMFORTABLE GRIP

Over-molded rubberized grip for a comfortable and secure grip while working

SECURELY HOLDS BLADE

Aluminum locking mechanism prevents blade from being removed during use

ACCOMMODATES HACKSAW BLADE

Ideal for flush cutting applications or when a hacksaw is not available

DIE CAST ALUMINUM CONSTRUCTION



Rotate Blade Out



Loosen Knob to Change Blade

PROD NO	DESCRIPTION	BLADES INCLUDED	APPLICATION
20997TFHS618636	Folding Jab Saw with 2 Blades	635R and 6J6R	Plaster, drywall, wood, plastic and metal cutting
148216J6R	One Pack Replacement Blades		

975 COMPACT HAND HACKSAW

908 CLOSE QUARTER™ SAW

Cut a Wide Variety in Tight Spaces

RUGGED DESIGN

Heavy duty aluminum handle

FITS IN TIGHT SPOTS

Allows for flush cutting applications



PROD NO	DESCRIPTION	TPI	BLADE LENGTH	
			IN	MM
20975975	Compact Hand Saw	10	12	304
20908908	CLOSE QUARTER Saw	10	18	457
20906906	Replacement Blades	32	6	152

SNIPS

Maximum Durability for Long Life

LONG BLADE LIFE

Precision-formed blades for Aviation and Bulldog Snips

Bi-material blades for Offset Snips

ULTIMATE SPRING DURABILITY

Reinforced Chrome Silicon valve-quality wire lasts for a lifetime

COMFORTABLE GRIPS

Over-molded handles won't slip or twist

QUICK IDENTIFICATION

Color coding on both blades and handles plus arrow icons allow for easy tool recognition



PROD NO	DESCRIPTION		CUTTING CAPACITY		COMPETITIVE CROSS REFERENCE			
			SHEET METAL	STAINLESS STEEL	MALCO®	MIDWEST®	WISS®	KLEIN®
22101101	Aviation Snip Left		18 ga	22 ga	M2001/MAXCG1	P6716-L	M1R	1100L
22102102	Aviation Snip Right		18 ga	22 ga	M2002/MAXCG2	P6716-R	M2R	1101R
22103103	Aviation Snip Straight		18 ga	22 ga	M2003/MAXCG3	P6716-S	M3R	1102S
22105105	Aviation Snip Bulldog		16 ga	20 ga	M2005/MAXCG5	P6716-B	M5R	2103
22206206	Offset Snip Left		18 ga	22 ga	M2006/MAXCG6	P6510-L	M6R	2100L
22207207	Offset Snip Right		18 ga	22 ga	M2007/MAXCG7	P6510-R	M7R	2101R

HVAC TOOLS

Precision Sheet Metal Fabrication Tools

ULTIMATE SPRING DURABILITY

Reinforced Chrome Silicone valve-quality wire lasts for a lifetime

COMFORTABLE GRIPS

Over-molded handles won't slip or twist



PROD NO	DESCRIPTION		CUTTING CAPACITY		COMPETITIVE CROSS REFERENCE			
			SHEET METAL	STAINLESS STEEL	MALCO®	MIDWEST®	WISS®	KLEIN®
22208C3	3 Blade Crimper		18 ga	22 ga	C3	—	HC3V	—
22209C5	5 Blade Crimper		18 ga	22 ga	C5	FCT-M-C5	HC5V	86550
22210S2	3" Seamer		18 ga	22 ga	S2	FCT-M-S1	HS1V	86553
22211N2	1" V Notcher		18 ga	22 ga	N2	—	—	—
22212SL1	Snap Lock Punch		18 ga	22 ga	SL1	FCT-M-L1	—	—
22213PDC4R	Pipe Duct Cutter		18 ga	22 ga	4R	FCT-M-P1	M14R	—

Malco is a registered trademark of Malco Products, Inc. Midwest is a registered trademark of Midwest Tool and Cutlery Company
Wiss is a registered trademark of Cooper Industries, Inc. Klein is a registered trademark of Klein Tools.



LOCKING TRADESMAN UTILITY KNIFE

Works Big. Folds Small.

EASY OPEN & CLOSE

Secure locking mechanism

COMFORT GRIP

Ergonomic rubberized grip

MULTI-USE TOOL

Bottle opener, screwdriver and pipe reamer

BUILT-IN WIRE STRIPPER



Wire Stripping



Pipe Reamer



Screwdriver



Bottle Opener

PROD NO	DESCRIPTION
10771FLK1	LENOX Gold® Locking Tradesman Utility Knife

UTILITY KNIVES

Durable Construction and Comfortable Grip for Extended Use

EXTREMELY DURABLE STAINLESS STEEL NOSE

One piece titanium coated nose resists wear and eliminates spreading

LONGEST LASTING UTILITY BLADES

Three shatterproof titanium edge blades included

EASY BLADE CHANGE

Quick blade release allows rotation or changing of blade without opening handle

INTERNAL BLADE STORAGE

Retractable knife stores up to five blades

Fixed knife stores up to ten blades

NO TOOL NEEDED TO OPEN



PROD NO	DESCRIPTION
20353SSRK1	LENOX Gold Quick Change Retractable Knife
20354SSFK1	LENOX Gold Fixed Blade Knife

UTILITY BLADES

Titanium Edge for Maximum Blade Life

LASTS LONGER

High speed steel edge with titanium coating keeps blades cutting after others have quit

SHATTERPROOF

Patented bi-metal construction allows blades to bend and flex without breaking


MAKES DEEPER CUTS

Four notch design allows blade to extend further

FITS ALL STANDARD UTILITY KNIVES

CUTS THE TOUGHEST MATERIALS

- Dry wall
- Insulation
- Flooring
- Roofing and more

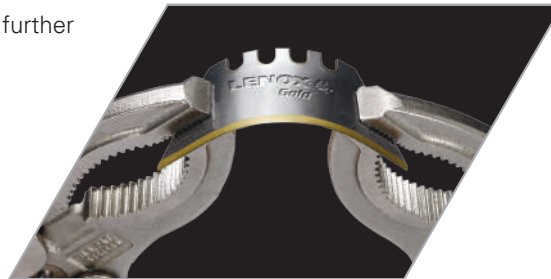

DISPENSERS

- Easy to use
- Dispenses one or five blades at a time
- 50 packs and 100 packs include dispensers

DESCRIPTION	5-PACK PROD NO	50-PACK PROD NO	100-PACK PROD NO
LENOX Gold Utility Knife Blade	20350GOLD5C	20351GOLD50D	20352GOLD100D

SELF-RETRACTING SAFETY KNIFE & BLUNT TIP SAFETY BLADES

A Safety Blade that Works

SMOOTH SELF-RETRACTION

Spring loaded shuttle

COMFORTABLE, NON-SLIP HANDLE

Ergonomic design

DUAL FUNCTION

Utility knife and box cutter settings

NO TOOL NEEDED FOR BLADE CHANGE

Quick blade changes

STORES UP TO 5 BLADES



INCREASED SAFETY

Blunt tip design

SHATTERPROOF

Patented bi-metal construction
Bends and flexes without breaking

LONG BLADE LIFE

High speed steel edge

PROD NO	DESCRIPTION
20366SRK1	Self-Retracting Safety Knife
20367BLUNT5C	Blunt Tip Safety Blade 5 pack
20368BLUNT50D	Blunt Tip Safety Blade 50 pack with Dispenser



TUBING CUTTERS

Ergonomically Designed for Professional Performance

WON'T WALK WHILE CUTTING

Four roller tracking system keeps tube from threading

PROFESSIONAL DEBURRING

Cleanly and easily deburr pipes with the replaceable machinist's reamer

WILL NOT DAMAGE CUTTING WHEELS

Full-stop feed system prevents wheels and rollers from coming into contact

EASY TO USE

Change out wheels quickly & easily

CONVENIENT STORAGE

Store an extra cutting wheel in the handle



PROD NO	DESCRIPTION	TUBE DIAMETER RANGE		NUMBER OF WHEELS
		IN	MM	
21008TC58	Copper Cutting	1/8–5/8	3–16	1
21009TC1	Copper Cutting	1/8–1	3–25	2
21010TC118	Copper Cutting	1/8–1-1/8	3–29	2
21011TC138	Copper Cutting	1/8–1-3/8	3–35	2
21012TC134	Copper Cutting	1/8–1-3/4	3–45	2
21013TC258	Copper/Plastic Cutting	1/4–2-5/8	6–67	2



21008TC58



21009TC1



21010TC118



21011TC138



21012TC134



21013TC258



THE LENOX GUARANTEE

Our products are backed by the LENOX limited warranty. We warrant that our products are free from defects in materials and workmanship and that these products will perform as described under normal use and service. This warranty of quality is valid for 90 days from confirmed date of purchase. Except as expressly set forth herein, LENOX makes no other warranties, express or implied, with regard to products, and expressly disclaims any warranty of fitness for a particular purpose. This warranty gives you specific legal rights and you may also have other rights which vary from state to state. Use our products only in accordance with LENOX instructions.

GENERAL SAFETY TIPS

LENOX is involved in the Voluntary Protection Program (VPP), designed to recognize and promote effective safety and health management. Our employees agree to participate in the program and work with management to assure a safe and healthful workplace under an established set of criteria. Several benefits to the VPP are the motivation to work safely, reduced workers' compensation costs and fewer lost workdays due to injuries. This all results in better quality and productivity.

We are also very concerned for the safety of the people using our products. Here are a few tips to remind you to use all safety measures to avoid any type of injury:

1. Tools can injure – handle with care.
2. When cutting through walls, be sure you're clear of electrical wires behind the wall.
3. Power tools can bind and kick back. Be sure to hold them firmly and keep yourself out of the recoil path.
4. Wear eye protection and other appropriate safety equipment when using tools.
5. Make sure ladders or staging are stable before using.
6. When using drilling accessories, a power tool with a torque limiting device is recommended.
7. Use power tools in accordance with manufacturers' instructions and recommendations for accessories.

TRADEMARK INFORMATION

INCONEL is a registered trademark of Huntington Alloys Corporation.
DURANICKEL, INCOLOY, MONEL and NI-SPAN C are registered trademarks of Inco Alloys International, Inc.
RENE 41 is a registered trademark of Teledyne Industries, Inc.
LITHONIA is a registered trademark of Lithonia, Inc.
LIGHTOLIER is a registered trademark of Lightolier, Inc.
PRESCOLITE is a registered trademark of Prescolite, Inc.
HUBBELL is a registered trademark of Hubbell, Inc.
MILWAUKEE is a registered trademark of Milwaukee Electric Tool Corp.
MORSE is a registered trademark of M.K. Morse Company.
BOSCH is a registered trademark of Robert Bosch Tool Corporation.
NIMONIC is a registered trademark of Henry Wiggin & Company, Ltd.
KLEIN is a registered trademark of Klein Tools.
MALCO is a registered trademark of Malco Products, Inc.
MIDWEST is a registered trademark of Midwest Tool and Cutlery Company.
WISS is a registered trademark of Cooper Industries, Inc.
RIDGID is a registered trademark of Ridge Tool Company.
NICHOLSON is a registered trademark of Cooper Hand Tools.
STARRETT is a registered trademark of the L.S. Starrett Company.

LENOX 



LENOX

PRODUCT CATALOG

BAND SAW BLADES / POWER TOOL ACCESSORIES / HAND TOOLS

 facebook.com/lenoxtools

 twitter.com/lenoxtools

 youtube.com/lenoxtools

LENOX ASIA OFFICE

8/F Lujiazui Fund Tower, No.101, Zhu Lin Road,
PuDong District, Shanghai, 200122, China
china@lenoxtools.com
lenoxtools.com
EDP: M3999635

LENOX GLOBAL HEADQUARTERS

301 Chestnut Street, East Longmeadow, MA 01028-0504 USA
©10/2017 LENOX