

CLASSIC MATT FINISH

FOR INTERIOR COMFORT

TRANS[®]
PAINT

www.transpaint.yungkong.com

Sno-Cote[®] Emulsion



SNO-COTE EMULSION



Water-Based
Low VOC
Heavy-Metals Free

Interior matt wall finish (water-based)

Standard Packing

7L (White & Standard Colours) & 18L (White Only)
1L, 7L & 18L available via Colour Waves™

Colour

As per colour chart;
Sno-Cote Series 100s



Application

Interior only

For use on

Concrete/ masonry

- Durability proven for cost effective application
- Matt water based finish - minimizes surface irregularities
- Good tolerance towards normal interior atmospheric humidity
- Ease of application - same day recoat, easy clean up and low odour

SNO-COTE EMULSION

This is an economical emulsion paint formulated specially designed for interior surfaces. It has a good flow with good hiding power, and cures to a classic matt finish. The formulation has very low VOC and is free from heavy metals gives you peace of mind when using this product. It can be used on interior walls of living rooms, bedrooms, common rooms, stairways, etc. This **water-based** product features **low VOC** and **heavy-metals free**, formulated with great care for your ease of mind when considering its effect to your health and the environment.

Standard	Equivalent to Malaysian Standard 903:1984 <i>Also available via Colour Waves</i>	
Colour	<i>See Sno-Cote Emulsion Colour Card</i>	
Pack Size	7 and 18 litres (1L available via colour tinting system)	
Composition	<i>Binder</i>	Vinyl acetate acrylic polymer emulsion
	<i>Pigment</i>	Inorganic, organic pigments and mineral extenders
	<i>Solvent</i>	Water
Volume Solid	36 ± 2% for standard white, varying with colours	
Recommended Dry Film thickness	30 – 50 microns (per coat)	
Drying Times *	<i>Touch Dry</i>	Within 30 minutes
	<i>Hard Dry</i>	Within 1 hour
Full Cure *	3 – 4 weeks; Time for the coating to reach its full chemical/mechanical properties and will resist and perform as per the properties featured	
Over-coating Interval *	Minimum 2 hours	
Spreading Rate *	8 – 12 m ² /litre/coat	
Application	<i>Brush/Roller</i>	Use as is, thin not exceeding 5% by volume with water if necessary
	<i>Conventional Spray</i>	Thin with water to 20% by volume
	<i>Airless Spray</i>	Thin with water to 10% by volume
Surface Preparation	<u><i>New Unpainted Surface</i></u>	<u><i>Previous Painted Surface</i></u>
	- Ensure surface is clean and dry - Apply appropriate sealer	- Remove loose paint film by hard scraping/high pressure water jet - Treat fungi, algae or mould with fungicidal wash - Ensure dry off before painting
Recommended Painting System	<u><i>Sequence</i></u>	<u><i>Product</i></u>
	Primer/ Undercoat (1 coat) Finish (2 coats)	SNO-COTE XTRA WEATHER SEALER/ SNO-COTE UNDERCOAT SNO-COTE EMULSION

* Based on recommended thickness; will vary considerably with surface characteristics, application techniques, weather and wastage.

The corresponding Safety Data Sheet (SDS) for this product shall be provided upon request.

Further inquiry and SDS request can be made to transpaint@yungkong.com

Manufactured by: **Trans Paint Coatings Sdn Bhd**. Lot 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak, Malaysia.

Tel: +6082 334 222 Fax: +6082 339 189 Website: www.transpaint.yungkong.com

While every care has been taken to ensure the accuracy of the information contained in this data sheet, it is provided in good faith and that no liability can be accepted arising from its use. Where the conditions of use warrant it, it is recommended that the data are checked to ensure their suitability for the use envisaged.

Revision: **6 NOV 2023**

<end of document>


Sno-Cote[®] *Emulsion*

■ ■ ■ ■ *Quality doesn't have to cost more*

■ Elegant Matt Finish

■ Breathable Film

■ Easy To Apply

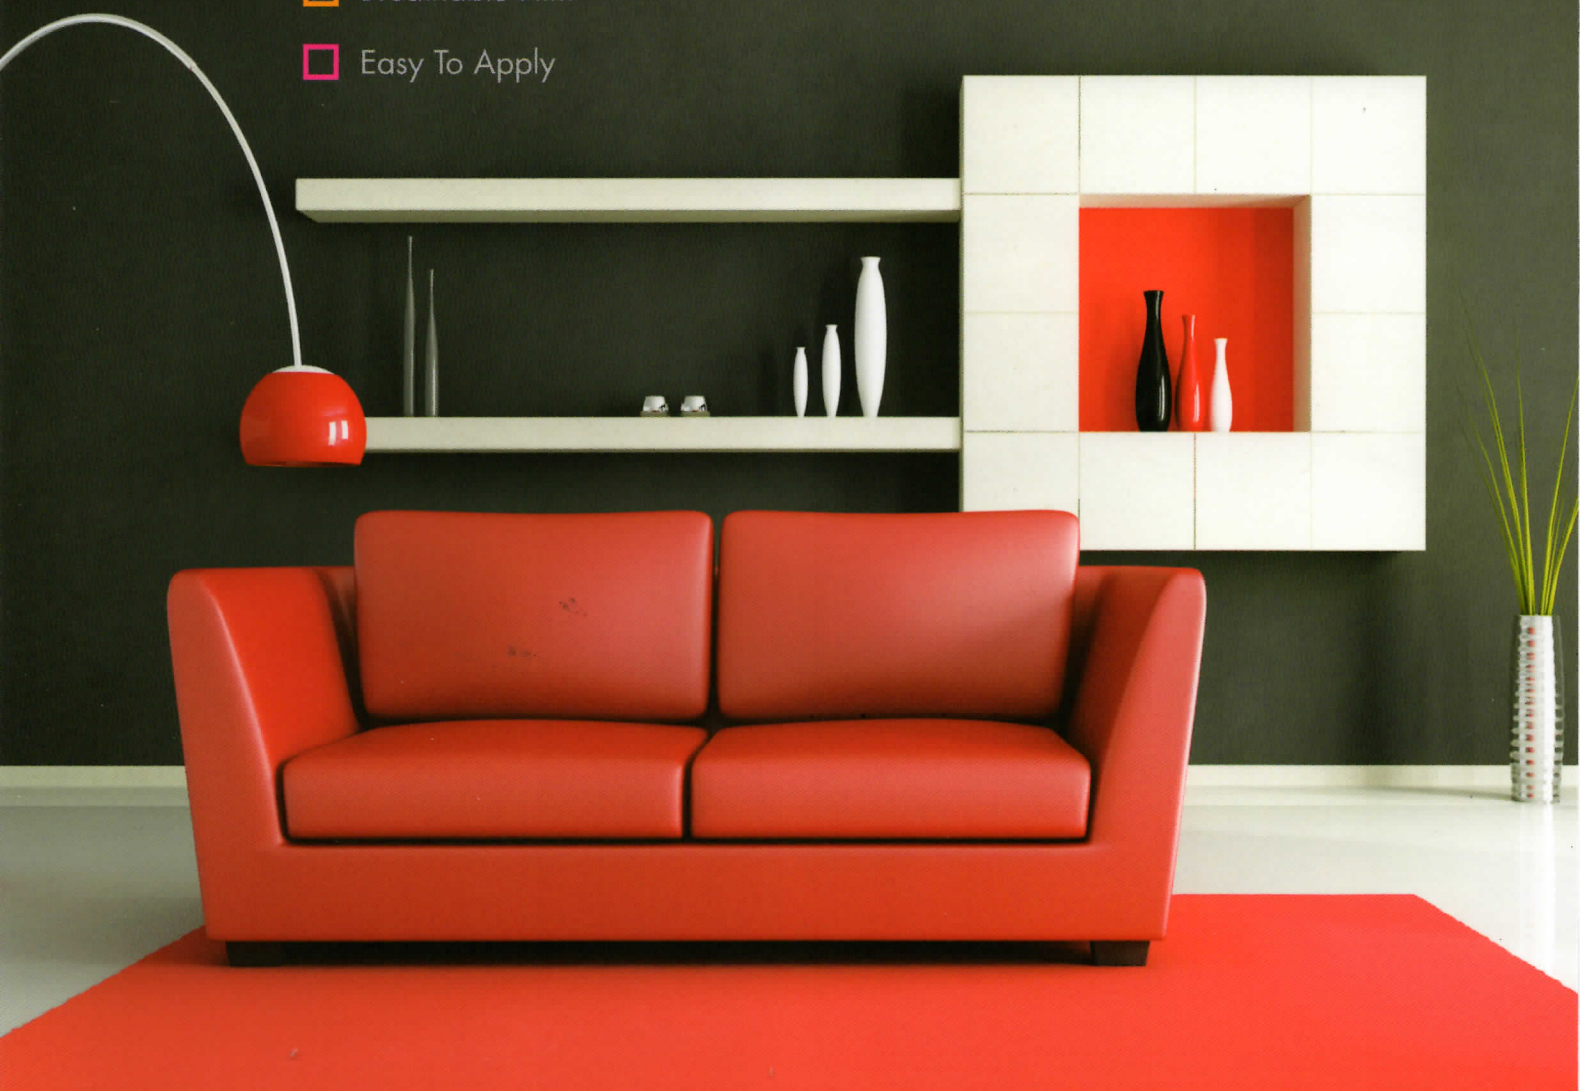

Sno-Cote® Emulsion



Raspberry 7447



Carnival 7139



Camel's Fur 7078



Lime Tint 7158



Romance 7120



Pretty 7001



Rose 7211



Chiffon 7174




Exotica 7552



Marvel ★ 7959



Auntie Rossa 7202



Butter 7423



Amazing ★ 7493



Spellbound 7988




Kirei 7173



Shimmer ★ 7599



Royal Night ★ 7261



Mom's Favourite ★ 7763



Mango Delight 7755



Flair ★ 7622



Velvet ★ 7309



Oh MY! ★ 7778




Too Hot ★ 7644



Fresh-Air ★ 7487

More colours available via Colour Waves™ machine (Sno-Cote® 5 series, 100 colours)
通过 Colour Waves™ 电脑配色系统, 有更多的颜色供选择 (Sno-Cote® 5 series, 一百个颜色)
Lebih banyak warna lagi melalui mesin Colour Waves™ (Sno-Cote® 5 series, 100 warna)

Quality doesn't have to cost more



Apple White 9140



Honey Dew 7206



Ice-Ice 7748



Pebble 7680



Milkshake 7200



Vanilla 7504




Ocean Blue 7581




Cream 7040



Lemon 7053




Willow 7377



Stork 7837



Mineral 7878




Apple Smoothie 7569



Bayu 7588



H2O 7444




Soothing Gray 7111



Leafy 7055



Tropic Bliss 7735



Chelsea ★ 7617



Slate 7077



Huey ★ 7244



Scarab Life ★ 7414



Scuba ★ 7511



Rugged 7941

★ Premium Colours

Also available in 9102 White

These patterns show approximate colour only

QC Print 04/16

Sno-Cote® Emulsion



SNO-COTE® Emulsion Paint is specially for use in tropical countries, suitable for interior application. It is easy to apply and fast drying, fungus resistance and washable.

DIRECTIONS FOR USE

- ▶ Stir contents thoroughly before use.
- ▶ Surfaces to be painted must be free from loose particles, grease, dirt, etc.
- ▶ Use only clean water for dilution when required.
- ▶ Allow two hour drying between coats.
- ▶ Replace lid tightly after use.

SNO-COTE® 是特别给热带国家使用的水漆, 适用于室内。它容易使用同时也快干, 防菌类及可抹洗。

用法说明

- ▶ 搅拌后方可涂漆。
- ▶ 欲上漆的表面须干净, 没有油脂, 污点和锈质。
- ▶ 必要时用清水稀释。
- ▶ 相隔二小时后方可涂上第二层。
- ▶ 用后要盖紧。

SNO-COTE® cat emulsi adalah khas digunakan di negeri tropika, sesuai untuk pakai di dalam. Ia senang diguna dan cepat kering, menentang ancaman kulat dan senang dicuci.

CARA MENGGUNA

- ▶ Kacaukan dengan sempurna sebelum disapu.
- ▶ Permukaan yang hendak dicat mestilah bersih, kering.
- ▶ Gunakan air sahaja untuk mencairkannya.
- ▶ Lapisan kedua mesti dilakukan dua jam setelah lapisan pertama.
- ▶ Selepas menggunakan mesti menutup tinnya.



WATER



WALL



ROLL ON



BRUSH ON



SPRAY ON



2HRS RECOAT



MADE IN MALAYSIA



TRANS-OCEAN COATINGS & CHEMICALS SDN BHD (37491-W)

Lot 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak, Malaysia.
website : <http://www.transpaint.yungkong.com>



Cert. No. 402974

Sno-Cote[®]

5 Series



TRANS[®]
P A I N T



Colour Waves[™]

Sno-Cote®

5 Series


Subtle



Cashmere S 6620



Mocassin S 6530



Dolly S 8120



Colonial Orange S 6420



Bisque S 5820



Astra S 6220



Peachpuff S 5120



Blue Chalk S 6121



Cumulus S 9110



Pink Lace S 6831



Lavender Rose S 5931



Pale Prim S 9220



Tidal S 1921



Scandal S 3631




Golden Rod S 0521



Reef S 1521




Sea Green S 2321



Beeswax S 8820



Fresh Lime S 1321



Coconut Cream S 8110



Also available in WHITE 9102 & BLACK 91003

All colours shown are close to the actual TRANS PAINT colours as modern printing techniques permit

Price differs with series

Cool




Perfume C 5631



Lilac C 5130



Almond C 6230




Flamingo C 6631



Tumbleweed C 5530



Tequila C 6730

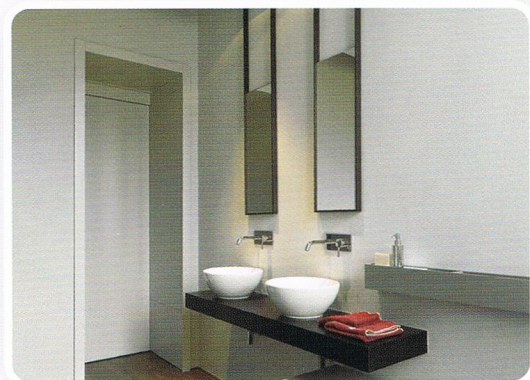

Sandwisp C 9330



Straw C 7830




Milan C 0031



Canary C 0221



Festival C 8530



Sapling C 2131



Magic Mint C 2631



Picasso C 9020



Sushi C 2021



Cruise C 4031



Periwinkle C 4541



Moss Green C 2731



Sinbad C 4241



Marina C 3241



Also available in WHITE 9102 & BLACK 91003

All colours shown are close to the actual TRANS PAINT colours as modern printing techniques permit


Price differs with series

Colours Of Quality Paints


Fresh



Sunglow **F 9930**



Tranquil **F 0812**



Twilight **F 6131**



Mona Lisa **F 5630**



Melon **F 7520**



Starship **F 0841**



Light Teal **F 3741**



Chatelle **F 5731**



Manhattan **F 6240**




Chamois **F 7120**



Refreshing **F 1631**



Viking **F 3641**



Cold Purple **F 4941**



Caramel **F 5830**



Rajah **F 6830**



Vida Loca **F 1431**



Celeste **F 5241**



Valentine **F 4851**



Blossom **F 7041**



Oak **F 7730**



Bold



Fizz **B 9840**



Dandelion **B 0131**



Pie Crust **B 8030**



Just Right **B 6540**



Hokey Pokey **B 5930**



Prairie **B 1131**



Green Tea **B 2231**



Hippie Green **B 0612**



Horizon **B 3441**



Dawn **B 2722**

Also available in WHITE 9102 & BLACK 91003

All colours shown are close to the actual TRANS PAINT colours as modern printing techniques permit

Price differs with series



Colour WavesTM

Powered by

Ralston

COLOUR & COATINGS

The Netherlands



Peach Orange **B 6330**



Wizard **B 7511**



Mama Mia **B 6841**



Cadet Blue **B 4341**



Boulder **B 1272**



Polo **B 5041**



Affair **B 5431**



Plum **B 5641**



Cerulean **B 3941**



Smoky **B 2012**



Daisy **W 1260**



Elf **W 9479**



Bright Green **W 0046**



Carrot Juice **W 4670**



Shrub **W 9979**



Combat **W 0498**



Bright Purple **W 0044**



Brickfair **W 3599**



Claypot **W 4770**



In A Nutshell **W 2070**



Pacific **W 7169**



Too Cool **W 5069**



King's Robe **W 4269**



Bright Orange **W 0042**



Hot Cocoa **W 5170**



Bright Blue **W 0045**




Egg Plant **W 5469**



Bright Red **W 0043**






Locomotive **W 8097**



Coal & Co **W 8388**



Also available in WHITE 9102 & BLACK 91003

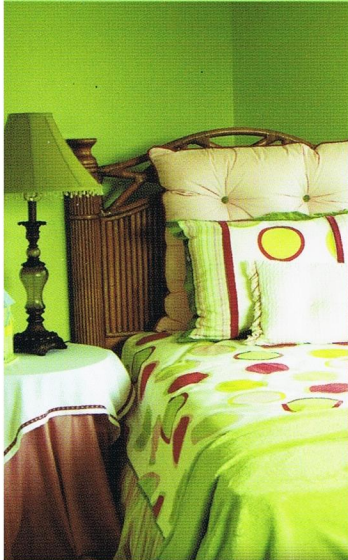

Sno-Cote® Xglo

Vinyl Acrylic Based Interior Emulsion Paint

Cat Emulsi Dalam Berasaskan Vinil Akrilik 室内乳胶漆

- Brilliant Sheen Finish
- Improved Stain Resistance

SNO-COTE® Xglo is a high quality vinyl acrylic based emulsion paint with a brilliant sheen finish for an improved stain resistance property on interior walls.

DIRECTIONS FOR USE

- Ensure surface is clean and dry
- Allow two hours to dry
- Dilute content with clean water if necessary
- Replace lid tightly after use
- Stir well

Coverage is approximately 10 sq. metres per litre.

Keep away from food, drinks, animal feed and children.

SNO-COTE® Xglo adalah cat emulsi berkualiti berasaskan vinil akrilik dengan kemasan berkilauan untuk menahan kesan kotoran pada permukaan dinding dalaman.

CARA MENGGUNA

- Pastikan permukaan bersih dan kering
- Biarkan kering selama dua jam
- Cairkan dengan air bersih jika perlu
- Tutupkan tin dengan ketat selepas digunakan
- Kacau

Liputan cat adalah lebih kurang 10 meter persegi seliter.

Jauhkan daripada makanan, minuman, makanan haiwan dan kanak-kanak.

SNO-COTE® Xglo是以高品质乙烯基丙烯酸制成的乳胶漆。光泽的效果加强了室内墙的耐沾污性，同时闪亮光泽的表现使墙面呈现出高贵的效果。

用法说明

- 欲上漆的表面必须干净而无松弛质的存在
- 必要时用清水调稀
- 相隔两小时后方可上第二层漆
- 用后要盖紧盖子
- 搅透后方可上漆

松施面积大约是每公升十平方公尺。

请远离食物、饮用水、饲料及儿童。



Colour Waves™
Powered by

Ralston
COLOUR & COATINGS

The Netherlands



WATER



INTERIOR



WALL



BRUSH ON



ROLL ON



SPRAY ON



1 HRS
RECOAT



MADE IN
MALAYSIA



Exterior & Interior Emulsion Paint

Cat Emulsi Luaran & Dalaman 室外/内水漆

- 5-YEAR Protection
- Fungus Resistant
- Washable

SNO-COTE® Xtra Paint is specially for use in tropical countries, suitable for both exterior and interior application. It is easy to apply and fast drying, fungus resistance and washable.

DIRECTIONS FOR USE

Stir contents thoroughly before use. Surfaces to be painted must be free from loose particles, grease, dirt, etc. Use only clean water for dilution when required. Allow one hour drying between coats. Replace lid tightly after use.

Coverage is approximately 10 sq. metres per litre.

Keep away from food, drinks, animal feed and children.

SNO-COTE® Xtra adalah khas digunakan di negeri tropika, sesuai untuk kegunaan luaran dan dalaman. Ia senang diguna dan cepat kering, menentang ancaman kulat dan senang dicuci.

CARA MENGGUNA

Kacaukan dengan sempurna sebelum disapu. Permukaan yang hendak dicat mestilah bersih, kering. Gunakan air saja untuk mencairkannya. Lapisan kedua mesti dilakukan satu jam setelah lapisan pertama. Selepas mengguna mesti menutup tinnya.

Liputan cat adalah lebih kurang 10 meter persegi seliter.

Jauhkan daripada makanan, minuman, makanan haiwan dan kanak-kanak.

SNO-COTE® Xtra 是为热带国家特别配制的水漆，适用于室外/内。容易使用而且快干，同时有抗菌及可清洗的功能。

用法说明

搅透后方可涂漆。髹漆的表面须干净，没有油脂、污迹等。必要时用清水调稀，并相隔一小时后方可涂上第二层。用后盖紧盖子。

松施面积大约是每公升十平方公尺。

请远离食物、饮用水、饲料及儿童。



WATER



EXTERIOR



WALL



BRUSH ON



ROLL ON



SPRAY ON



1 HRS
RECOAT



MADE IN
MALAYSIA



Colour Waves™

Powered by
Ralston
COLOUR & COATINGS

The Netherlands



Sno-Cote® Emulsion

Interior Emulsion Paint Cat Emulsi Dalaman 室内水漆

- Elegant Matt Finish
- Breathable Film
- Easy To Apply


SNO-COTE® Emulsion Paint is specially for use in tropical countries, suitable for interior application. It is easy to apply and fast drying, fungus resistance and washable.

DIRECTIONS FOR USE

- Stir contents thoroughly before use.
- Surfaces to be painted must be free from loose particles, grease, dirt, etc.
- Use only clean water for dilution when required.
- Allow two hour drying between coats.
- Replace lid tightly after use.

Coverage is approximately 10 sq. metres per litre.

Keep away from food, drinks, animal feed and children.



SNO-COTE® cat emulsi adalah khas digunakan di negeri tropika, sesuai untuk pakai di dalam. Ia senang diguna dan cepat kering, menentang ancaman kulat dan senang dicuci.

CARA MENGGUNA

- Kacaukan dengan sempurna sebelum disapu.
- Permukaan yang hendak dicat mestilah bersih, kering.
- Gunakan air sahaja untuk mencairkannya.
- Lapisan kedua mesti dilakukan dua jam setelah lapisan pertama.
- Selepas mengguna mesti munutup tinnya.

Liputan cat adalah lebih kurang 10 meter persegi seliter.

Jauhkan daripada makanan, minuman, makanan haiwan dan kanak-kanak.

SNO-COTE® Emulsion 是特别给热带国家使用的水漆，适用于室内。它容易使用同时也快干，防菌类及可抹洗。

用法说明

- 搅拌后方可涂漆。
- 欲上漆的表面须干净，没有油脂，污点和锈质。
- 必要时用清水稀释。
- 相隔二小时后方可涂上第二层。
- 用后要盖紧。

松施面积大约是每公升十平方公尺。

请远离食物、饮用水、饲料及儿童。



WATER



INTERIOR



WALL



BRUSH ON



ROLL ON



SPRAY ON



2 HRS
RECOAT



MADE IN
MALAYSIA



TRANS PAINT COATINGS SDN BHD (37491-W)

Lot 1393, Jalan Meranti, Bintawa Industrial Estate,
93450 Kuching, Sarawak, Malaysia.
Website : <http://www.transpaint.yungkong.com>



Cert. No. 402974

